

SPECTRA
BY LELCO

Architectural
Edition **9**



DOWNLIGHT



QUANTUM
Page 7



DORMUS
Page 61



APOLLO
Page 69



ADAPT
Page 77



MINI ME
Page 126



NEW GRID II
Page 131



APTO II
Page 153

LINEAR LIGHT



VARIUS
Page 157



LEDSTRIP
Page 180



ALUMINUM
PROFILE
Page 198



GRAZER
PROFILE
Page 203



GRAZER
Page 206

SPOTLIGHT/
FLOODLIGHT



LAZZIO
Page 209



SCOPE LED
Page 213



SNIPER II
Page 217

WALL LIGHT



LADDER
INDOOR
Page 220



LADDER
OUTDOOR
Page 222



QUINOZZ
Page 225

BOLLARD



CRESCENT
Page 228

INGROUND




EYELIT
Page 231

BLUETOOTH CONTROL AT YOUR FINGERTIPS

Casambi technology provides a self-organizing wireless bluetooth mesh network able to control a large number of fixtures from any point. It also allows for firmware updates over the network, allowing any kind of changes to be made over-the-air. In this kind of fully distributed and symmetric architecture, any unit can go offline and catch up from others when they return back online.

The Casambi devices are smart on their own and only connected when needed. An Internet connection is not necessary for normal operation, it is only needed for user interface configurations to be sent or recalled from the cloud service.



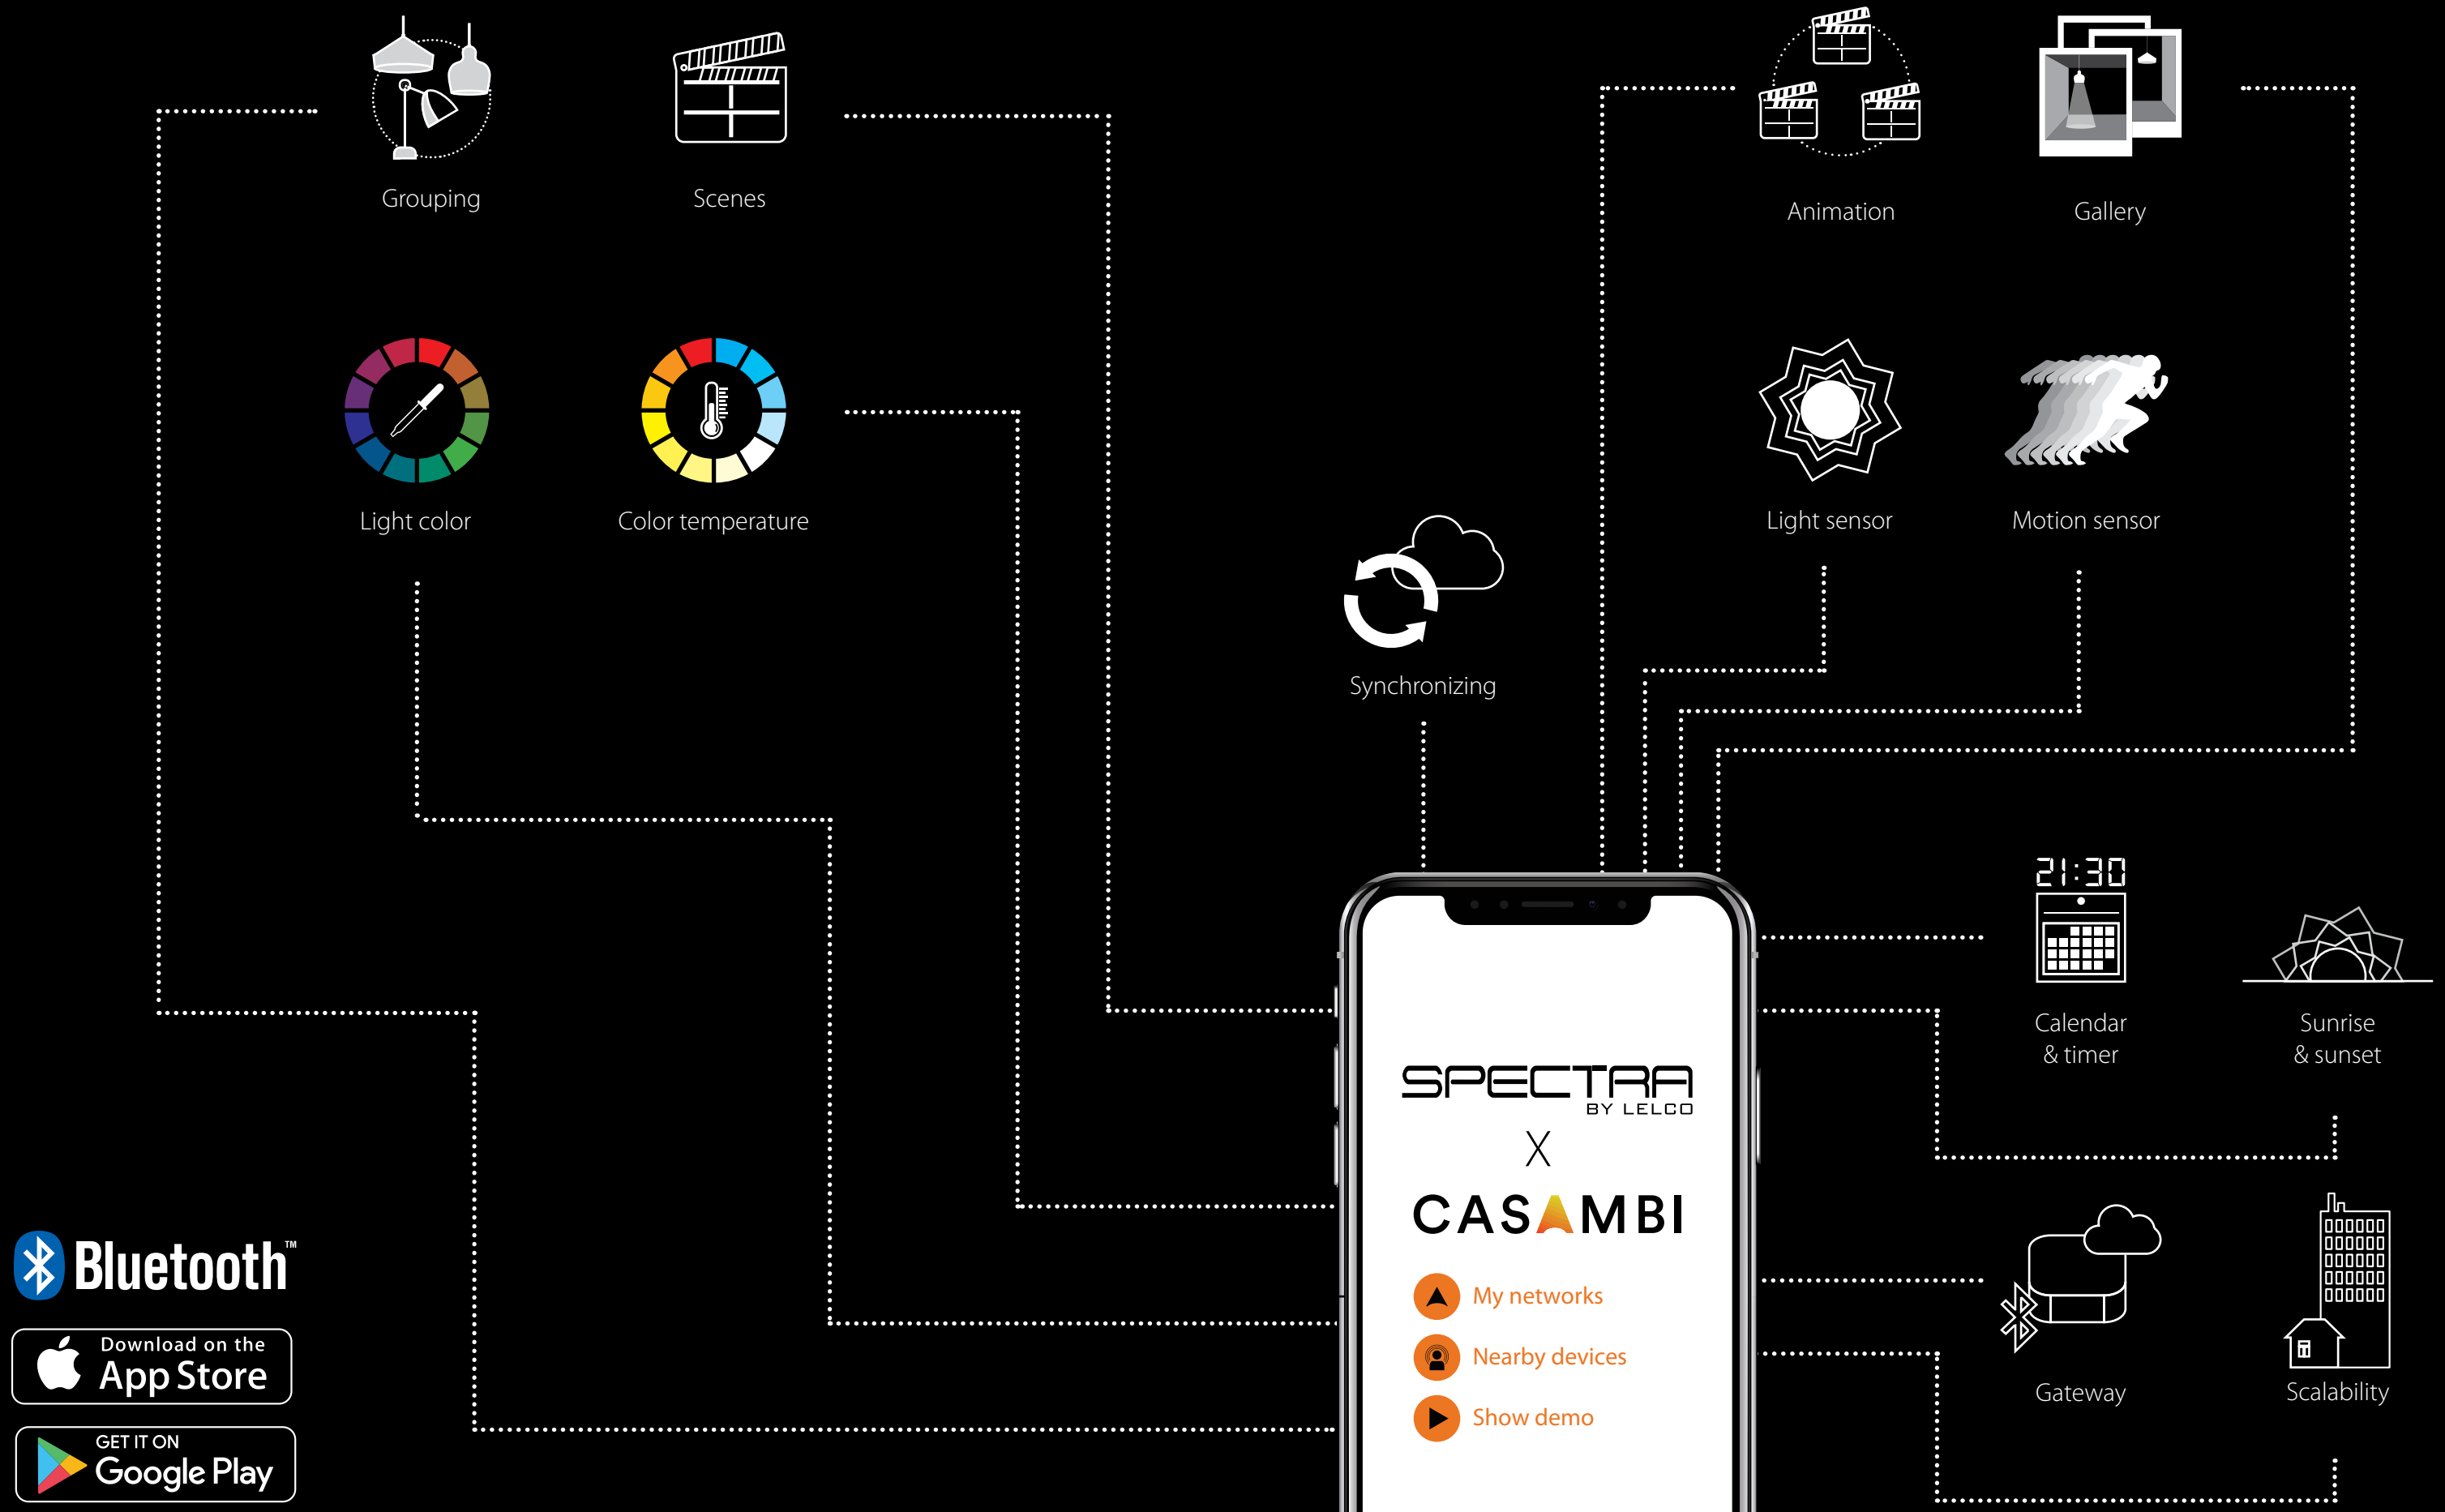


 **Bluetooth™**

 Download on the
App Store

 GET IT ON
Google Play

QUANTUM

#Make it Your Own

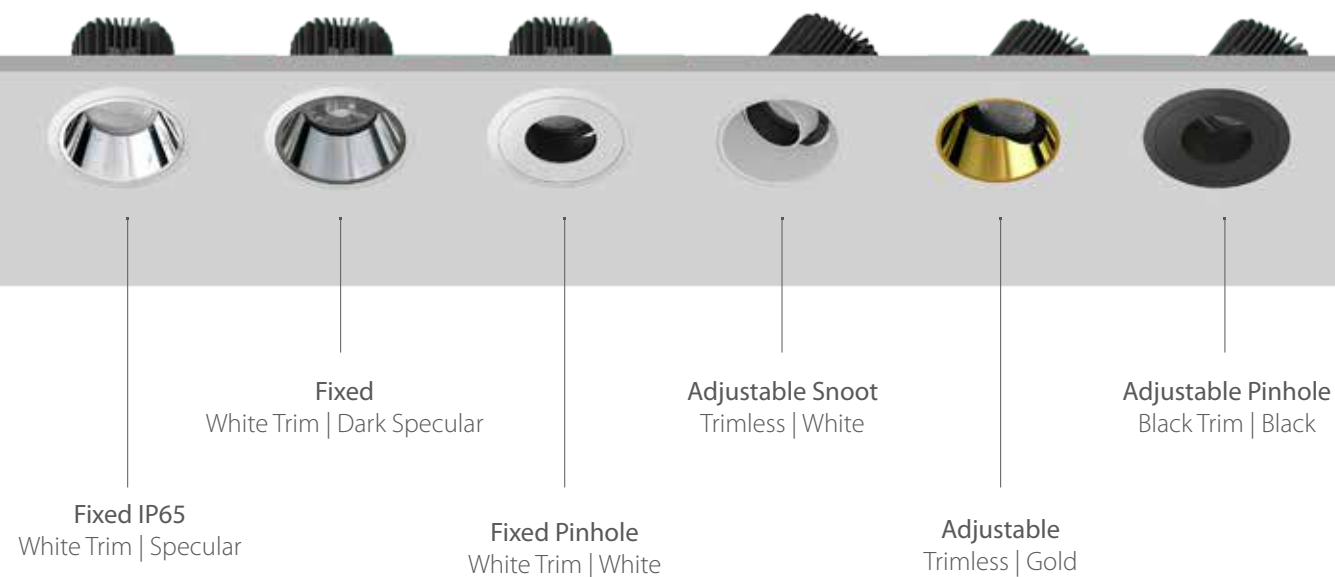

MIX & MATCH


Trim

- White Trim
- Black Trim
- Trimless















Reflector

- Specular
- White
- Black
- Gold
- Dark Specular

QUANTUM | Scale 1:1

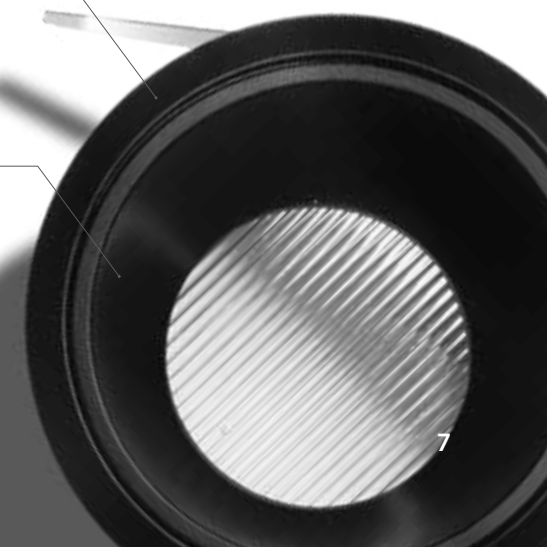

Product Name	QUANTUM Fixed						QUANTUM Fixed IP65					
Trim Type	Trim Trimless						Trim					
Cut Out	Ø75						Ø75					
Source	MR16 GU10 PC50 MD50 E50N E50P						MR16 GU10 PC50 MD50 E50N E50P					
Trim Diameter & Height	Ø82 H:95	Ø82 H:84	Ø82 H:80	Ø82 H:118 H:158	Ø82 H:107	Ø82 H:111	Ø82 H:95	Ø82 H:84	Ø82 H:80	Ø82 H:118 H:158	Ø82 H:107	Ø82 H:111
Wattage & Luminous Flux	12.3W 900lm		18W 1950lm	7.5W 600lm	12W 1000lm		12.3W 900lm		18W 1950lm	7.5W 600lm	12W 1000lm	
	12.9W 1400lm		25W 2800lm				12.9W 1400lm		25W 2800lm			
Beam Angle	15° 24° 40°		15° 24° 36° 60°	20° 35° 60°	20° 35° 60°		15° 24° 40°		15° 24° 36° 60°	20° 35° 60°	20° 35° 60°	
CCT	2700K 3000K 4000K		2700K 3000K 4000K	1800K - 4000K	1800K - 4000K		2700K 3000K 4000K		2700K 3000K 4000K	1800K - 4000K	1800K - 4000K	
				2700K - 6500K	2700K - 6500K					2700K - 6500K	2700K - 6500K	
CRI	>80 >90		>90	>95	>95		>80 >90		>90	>95	>95	
Trim Color	Black White Trimless						Black White					
Reflector Color	Specular White Black Gold Dark Specular											
Accessories	Honeycomb Louvre Linear Spread Lens Soft Edge Lens											
Driver	Non-Dim 1-10V DALI Phase-Cut Casambi											

QUANTUM Adjustable						QUANTUM Pinhole Fixed						QUANTUM Pinhole Adjustable					
 Snoot						 Trim						 Trim					
 Trim						 Trimless						 Trimless					
 Ø75						 Ø75						 Ø75					
 MR16						 GU10						 PC50					
 MD50						 MD50						 MD50					
 E50N						 E50N						 E50N					
 E50P						 E50P						 E50P					
 Ø82 H:95						 Ø82 H:95						 Ø82 H:95					
 Ø82 H:84						 Ø82 H:84						 Ø82 H:84					
 Ø82 H:80						 Ø82 H:80						 Ø82 H:80					
 Ø82 H:118 H:158						 Ø82 H:118 H:158						 Ø82 H:118 H:158					
 12.3W 900lm						 12.3W 900lm						 12.3W 900lm					
 18W 1950lm						 18W 1950lm						 18W 1950lm					
 7.5W 600lm						 7.5W 600lm						 7.5W 600lm					
 12W 1000lm						 12W 1000lm						 12W 1000lm					
 12.9W 1400lm						 12.9W 1400lm						 12.9W 1400lm					
 25W 2800lm						 25W 2800lm						 25W 2800lm					
 15° 24° 40°						 15° 24° 40°						 15° 24° 40°					
 15° 24° 36° 60°						 15° 24° 36° 60°						 15° 24° 36° 60°					
 20° 35° 60°						 20° 35° 60°						 20° 35° 60°					
 20° 35° 60°						 20° 35° 60°						 20° 35° 60°					
 2700K 3000K 4000K						 2700K 3000K 4000K						 2700K 3000K 4000K					
 2700K 3000K 4000K						 2700K 3000K 4000K						 2700K 3000K 4000K					
 1800K - 4000K						 1800K - 4000K						 1800K - 4000K					
 1800K - 4000K						 1800K - 4000K						 1800K - 4000K					
 2700K - 6500K						 2700K - 6500K						 2700K - 6500K					
 2700K - 6500K						 2700K - 6500K						 2700K - 6500K					
 >80 >90						 >80 >90						 >80 >90					
 >90						 >90						 >90					
 >95						 >95						 >95					
 >95						 >95						 >95					
 Black  White  Trimless																	
 Specular						 White											
 White						 Black											
 Black																	
 Gold																	
 Dark Specular																	
 Honeycomb Louvre						 Honeycomb Louvre											
 Linear Spread Lens						 Linear Spread Lens											
 Soft Edge Lens						 Soft Edge Lens											
 Anti Scallop																	
Non-Dim 1-10V DALI Phase-Cut Casambi																	



EASY MAINTENANCE


Remove the luminaire without removing the trim.
Quick-release lamp module for easy lamp replacement.




INTERCHANGEABLE

with most MR16, GU10, and Ø50 LED Module


MR16



GU10




LED MODULE



Supported Brands

Soraa
Philips
Osram
etc.

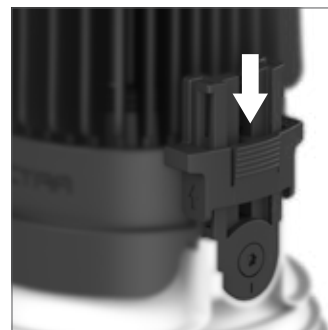

Slide down to lock the lamp in place.

TRIMLESS

option available



ADJUSTABLE

tilt up to 30°, rotate up to 360°



QUANTUM TUNABLE WHITE MODULE

Tune White on-demand color temperature adjustment system. With a tuning range from warm, halogen-like 2700K through to cool 6500K, flexible room atmospheres can be easily achieved.

This feature is interfaced to a DALI control system and is compatible with the latest DALI part 209 directive. This allows the tuning of color temperature with a single DALI address for simplified installation and configuration.



EXPERIENCE DEEP DIMMING

Dimming from 100% to 5% is great...
But is even greater if dim further to 0.1%.



SCALLOP LIGHTING EFFECT

Light shape which is called light scalloping is often visible on wall and very important in lighting design.



Quantum downlights produce a lower scalloping effect, by adding accessories "Anti Scallop"



Quantum Adjustable

+



Anti Scallop

Adjustable

White Trim | Dark Specular
7.2W | 450 lm | 24° | 3000K



Fixed



White Trim | Dark Specular
7.2W | 450 lm | 24° | 3000K




QUANTUM MR16/GU10 Fixed

IP20 LED



- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options
- Lamp and control gear to be ordered separately

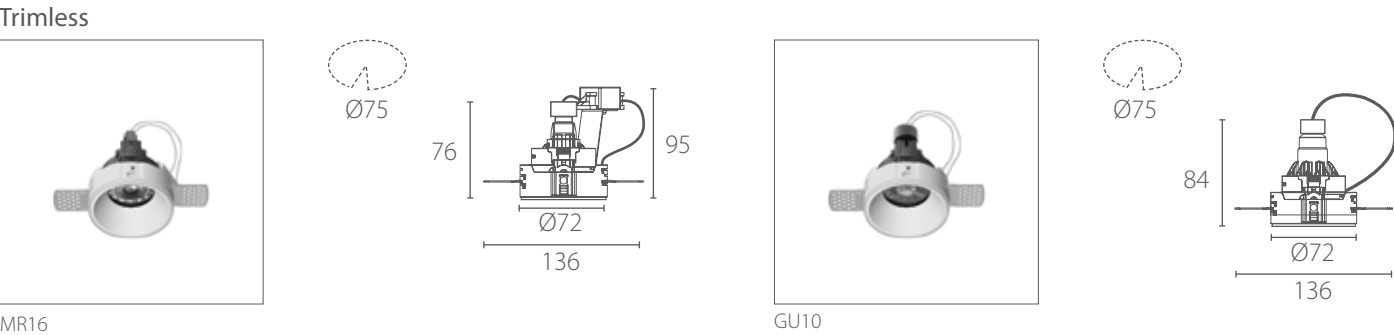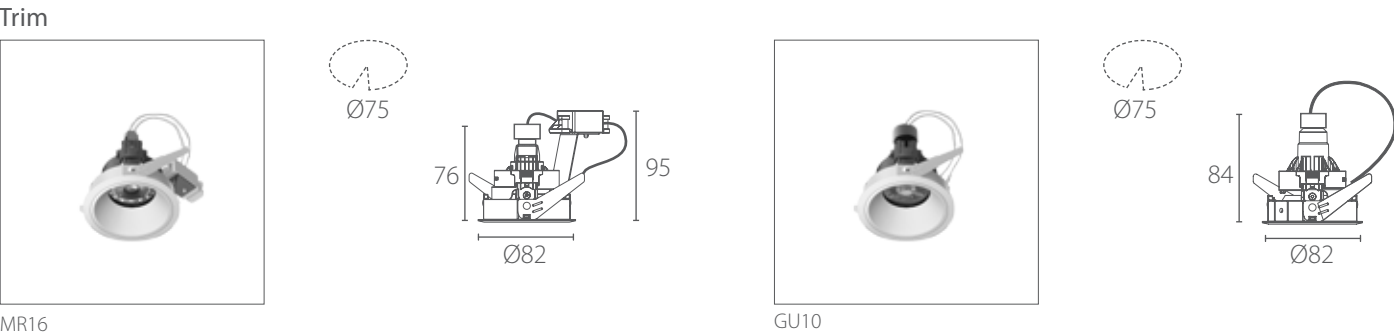

Finish

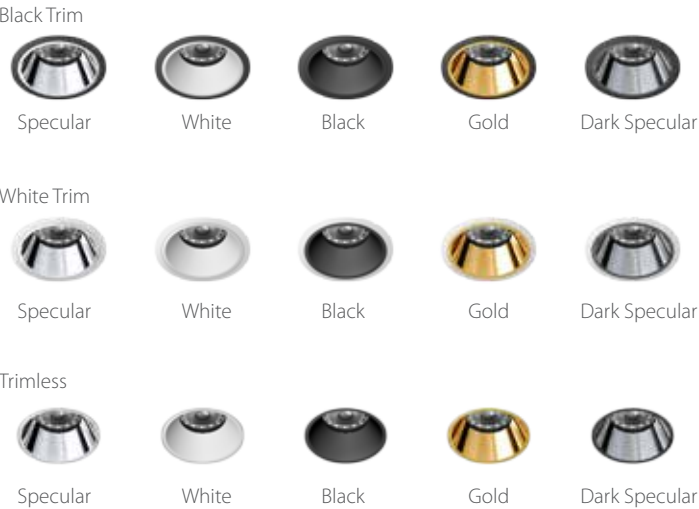

Accessories

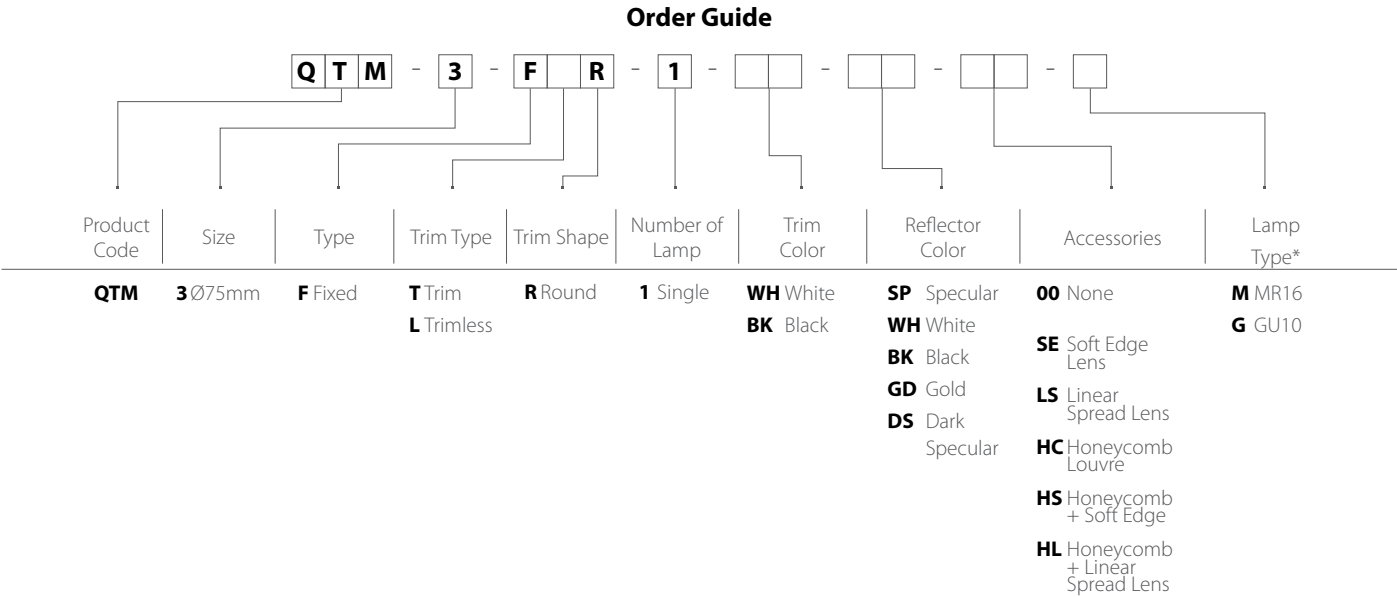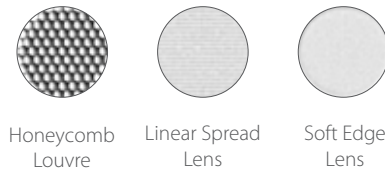

*To be ordered separately

QUANTUM LED Module Fixed


IP20 LED

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options


Trim



PC50

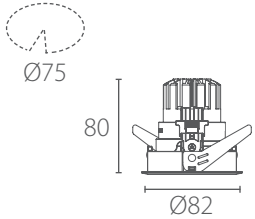

MD50

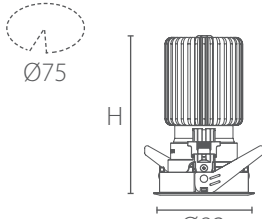


18W / H = 118
25W / H = 158


Trimless



PC50

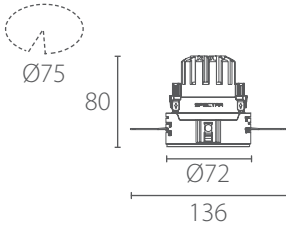

MD50

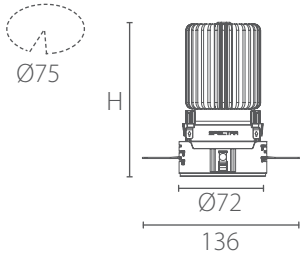

18W / H = 118
25W / H = 158

Finish

Black Trim




White Trim



Trimless



Accessories

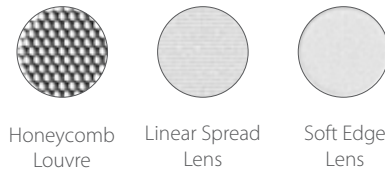

LED Module Type



PC50


900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K



MD50

1950 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K
2800 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K

Order Guide

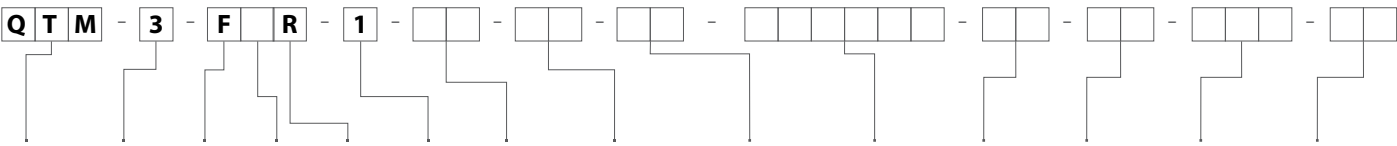

Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
QTM	3 Ø75mm	F Fixed	T Trim L Trim-less	R Round	1 Single	WH White BK Black	SP Specular WH White BK Black GD Gold DS Dark	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
										13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	
										18 18W 1950lm 500mA 36V	SP 15° MD 24° FL 36° WF 60°	927 2700K CRI>90 930 3000K CRI>90 935 3500K (make to order) CRI>90 940 4000K CRI>90	
										25 25W 2800lm 700mA 36V	SP 15° MD 24° FL 36° WF 60°	927 2700K CRI>90 930 3000K CRI>90 935 3500K (make to order) CRI>90 940 4000K CRI>90	

Fixed IP65
White Trim | Dark Specular



IP65 WATER
RESISTANT
(from below)

QUANTUM MR16/GU10 Fixed IP65


IP65 LED

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available five reflector color options
- Lamp and control gear to be ordered separately


Trim



MR16

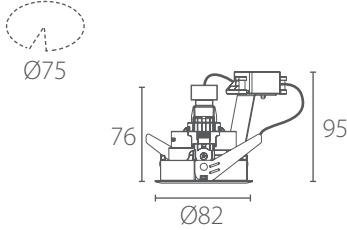

GU10




Finish


Black Trim



White Trim



Accessories

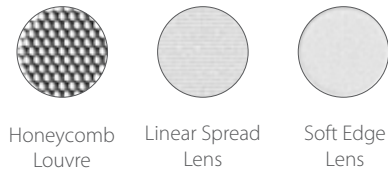

Order Guide

Q T M - 3 - I T R - 1 - - - -									
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type*
QTM	3 Ø75mm	I Fixed IP65	T Trim	R Round	1 Single	WH White BK Black	SP Specular WH White BK Black GD Gold DS Dark Specular	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	M MR16 G GU10

*To be ordered separately



Fixed
Black Trim | Gold
7.2W | 450 lm | 24° | 3000K



Adjustable
White Trim | Dark Specular
7.2W | 450 lm | 24° | 3000K

QUANTUM MR16/GU10 Adjustable


IP20 LED

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options
- Lamp and control gear to be ordered separately


Trim



MR16

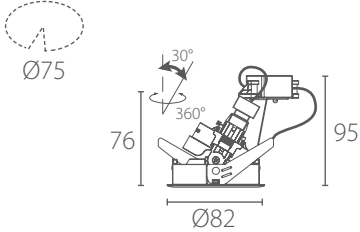


GU10

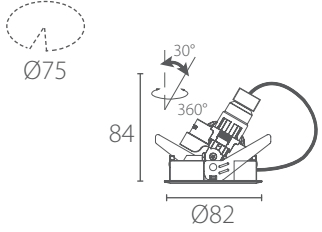


Trimless



MR16

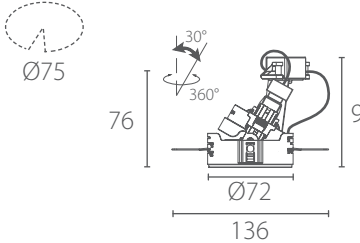

GU10




Finish


Black Trim




White Trim



Trimless



Accessories

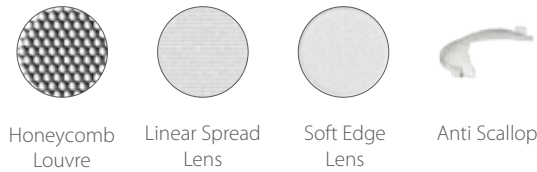

Order Guide



Q T M - 3 - A R - 1 - - - -									
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type*
QTM	3 Ø75mm	A Adjust-able	T Trim L Trimless	R Round	1 Single	WH White BK Black	SP Specular WH White BK Black GD Gold DS Dark Specular	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre AS Anti Scallop HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens HA Honeycomb + Anti Scallop	M MR16 G GU10

*To be ordered separately


QUANTUM Tunable Adjustable

IP20 LED


- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options

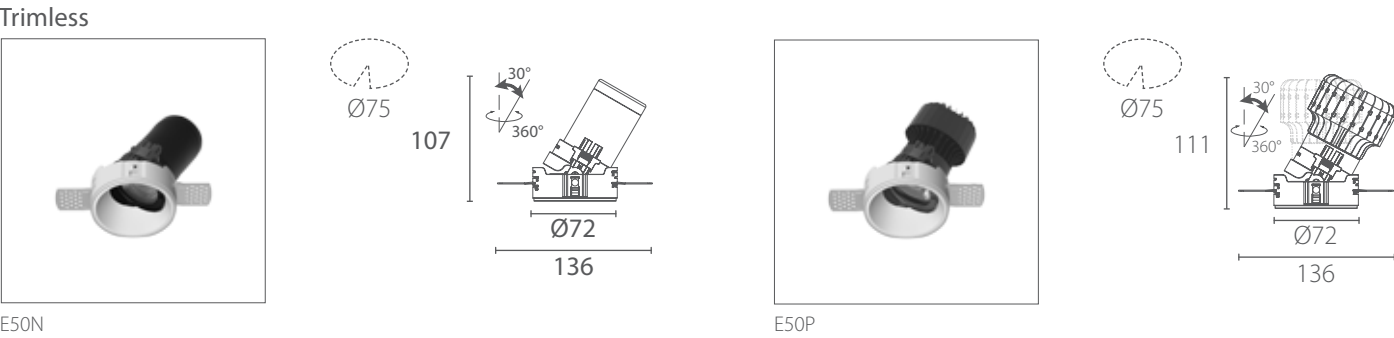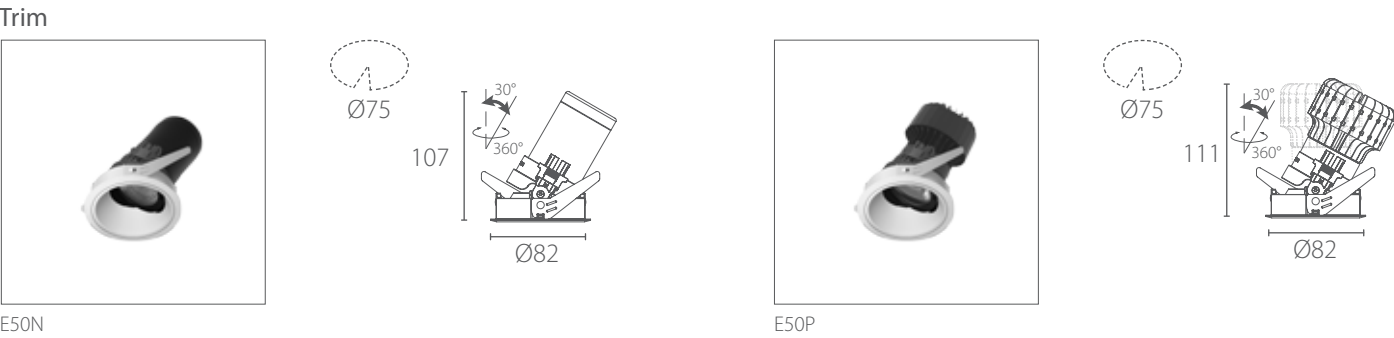

Finish

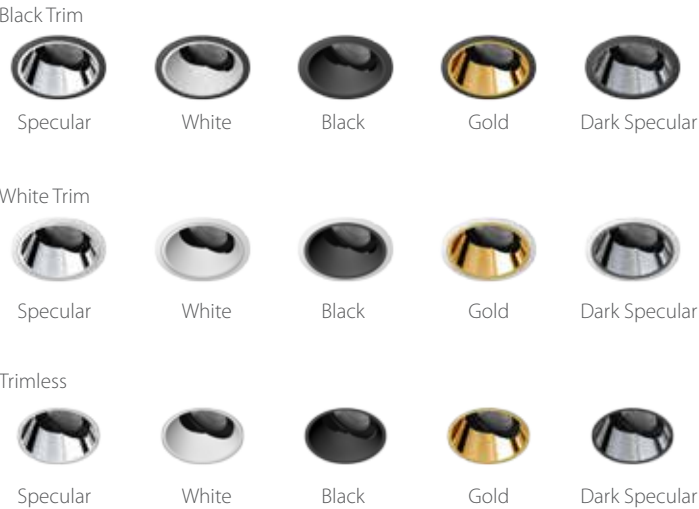

Accessories

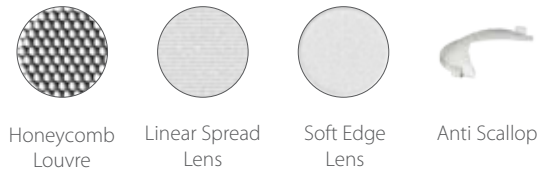

Tunable White



Order Guide														
Q T M	3	A	R	1										
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear	
QTM	3	Adjustable	Trim Type	Round	1	White	Specular	None	E50N G1	07 7.5W 600lm	MD 20° FL 35° WF 60°	T18 1800K - 4000K CRI>95 T27 2700K - 6500K CRI>95	DA DALI CA Casambi	
			Trimless			Black	White	Soft Edge Lens						
							Black	Linear Spread Lens						
							Gold	Honeycomb Louvre						
							Dark	Anti Scallop						
								Honeycomb + Soft Edge	E50P G1	12 12W 1000lm	MD 20° FL 35° WF 60°	T18 1800K - 4000K CRI>95 T27 2700K - 6500K CRI>95		
								Honeycomb + Linear Spread Lens						
								Honeycomb + Anti Scallop						

QUANTUM MR16/GU10 Adjustable Snoot


IP20 LED

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options
- Lamp and control gear to be ordered separately


Trim



MR16

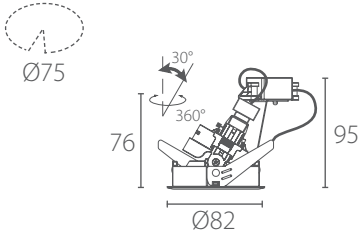


GU10

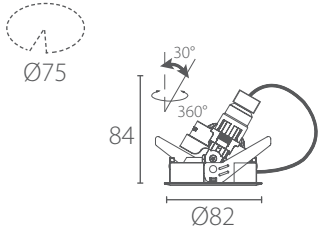


Trimless



MR16

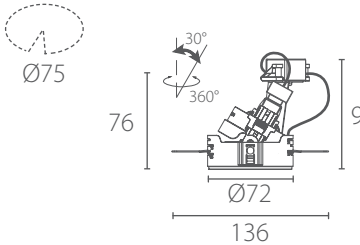

GU10

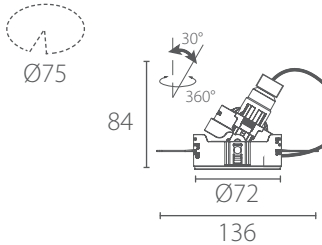

Finish


Black Trim




White Trim



Trimless

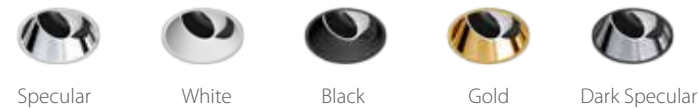

Accessories

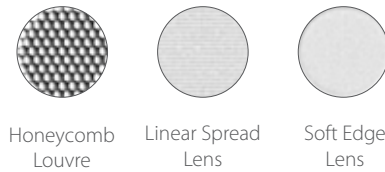

Order Guide

Q T M - 3 - S R - 1 - - - -									
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type*
QTM	3 Ø75mm	S Adjustable Snoot	T Trim L Trimless	R Round	1 Single	WH White BK Black	SP Specular WH White BK Black GD Gold DS Dark Specular	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	M MR16 G GU10

*To be ordered separately



QUANTUM LED Module Adjustable Snoot

IP20

LED

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options

Trim





PC50

MD50

18W / H = 118
25W / H = 158

Trimless



PC50

MD50

18W / H = 118
25W / H = 158

Finish

Black Trim



Specular White Black Gold Dark Specular

White Trim



Specular White Black Gold Dark Specular

Trimless



Specular White Black Gold Dark Specular

Accessories



Honeycomb Louvre Linear Spread Lens Soft Edge Lens

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K



MD50
1950 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K
2800 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K

Order Guide														
Q T M	3	S	R	1										
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear	
QTM	3 Ø75mm	S Adjustable Snoot	T Trim L Trimless	R Round	1 Single	WH White BK Black	SP Specular WH White BK Black GD Gold DS Dark	SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	OO None	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
										13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80		
										MD50 G1	18W 1950lm 500mA 36V	SP 15° MD 24° FL 36° WF 60°	927 2700K CRI>90 930 3000K CRI>90 935 3500K (make to order) CRI>90 940 4000K CRI>90	
										25 25W 2800lm 700mA 36V	SP 15° MD 24° FL 36° WF 60°	927 2700K CRI>90 930 3000K CRI>90 935 3500K (make to order) CRI>90 940 4000K CRI>90		


QUANTUM Tunable Adjustable Snoot

IP20 LED


- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options

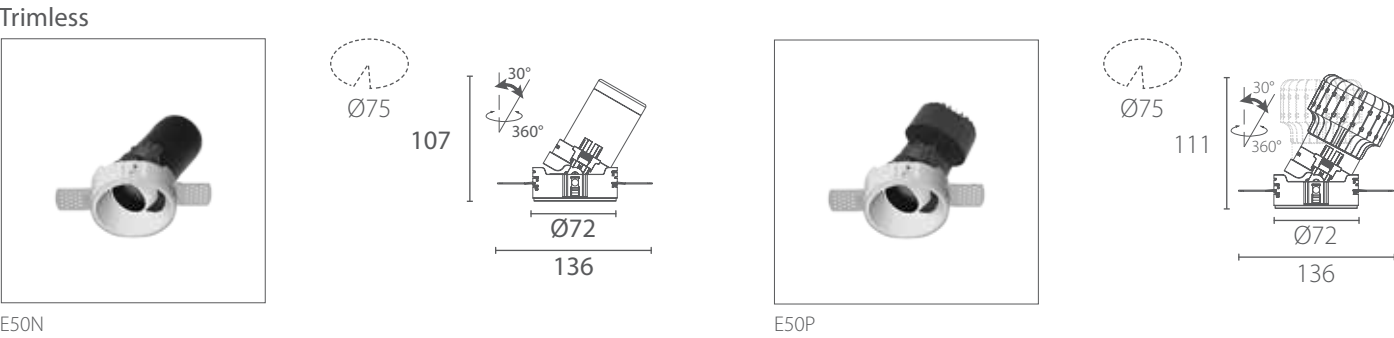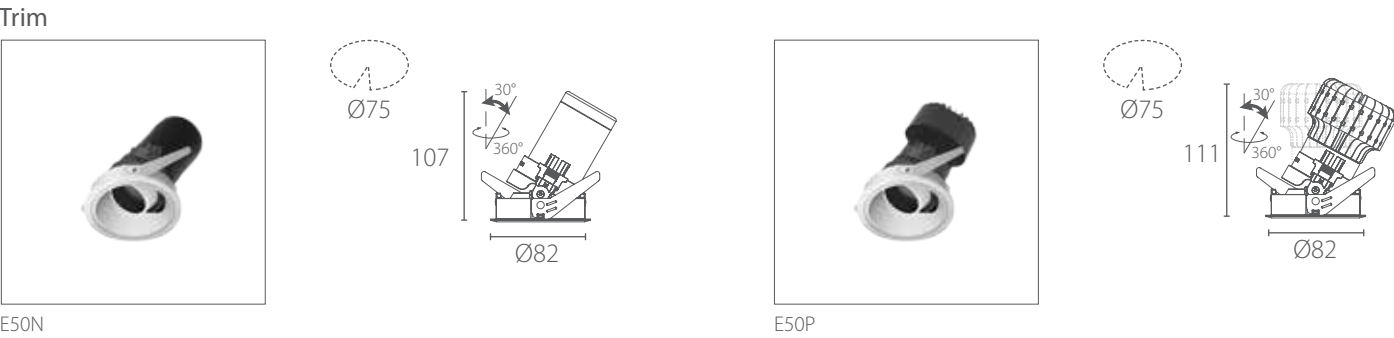

Finish

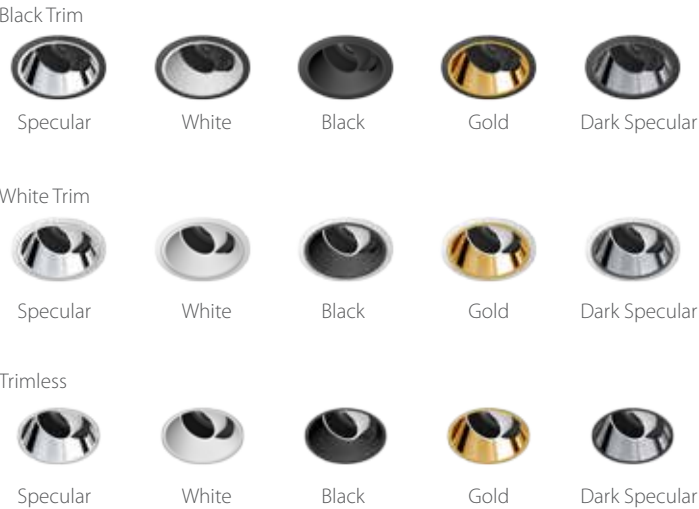

Accessories

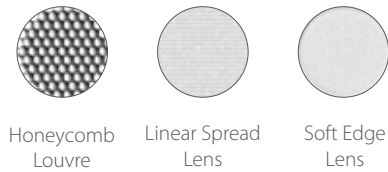

Tunable White



Order Guide																																		
Q	T	M	-	3	-	S		R	-	1	-			-			-					-			-					-				
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear																					
QTM	3	Adjustable Snoot	Trimless	Round	1	White	White	Specular	None	E50N G1	07 7.5W 600lm	MD 20° FL 35° WF 60°	T18 1800K - 4000K CRI>95 T27 2700K - 6500K CRI>95	DALI Casambi																				
						Black	White	Soft Edge Lens	E50P G1	12 12W 1000lm	MD 20° FL 35° WF 60°	T18 1800K - 4000K CRI>95 T27 2700K - 6500K CRI>95																						
						Gold	Linear Spread Lens																											
						Dark	Honeycomb Louvre																											
							Honeycomb + Soft Edge																											
							Honeycomb + Linear Spread Lens																											

Pinhole Fixed

White Trim | White | Honeycomb
7.2W | 450 lm | 24° | 3000K




QUANTUM MR16/GU10 Pinhole Fixed

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options
- Lamp and control gear to be ordered separately


Trim



MR16

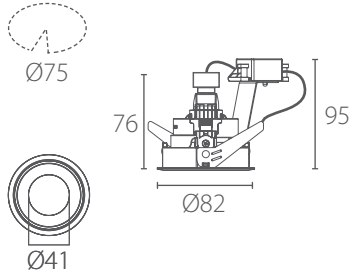


GU10




Trimless



MR16

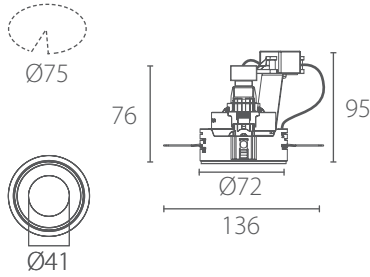

GU10



Finish

Black Trim



Black

White Trim



White

Trimless




Black



White

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide

Q T M - 3 - P R - 1 - - - -									
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Pinhole Color	Accessories	Lamp Type*
QTM	3 Ø75mm	P Pinhole Fixed	T Trim L Trimless	R Round	1 Single	WH White BK Black	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	M MR16 G GU10

*To be ordered separately

QUANTUM Tunable Pinhole Fixed




- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options


Trim



E50N




E50P




Trimless



E50N



E50P



Finish

Black Trim



Black

White Trim



White

Trimless




Black



White

Accessories



Honeycomb
Louvre



Linear Spread Lens



Soft Edge
Lens

Tunable White



E50N


600 lm | 20°/35°/60° | CRI>95 | 1800K - 4000K / 2700K - 6500K



E50P

1000 lm | 20°/35°/60° | CRI>95 | 1800K - 4000K / 2700K - 6500K

Order Guide

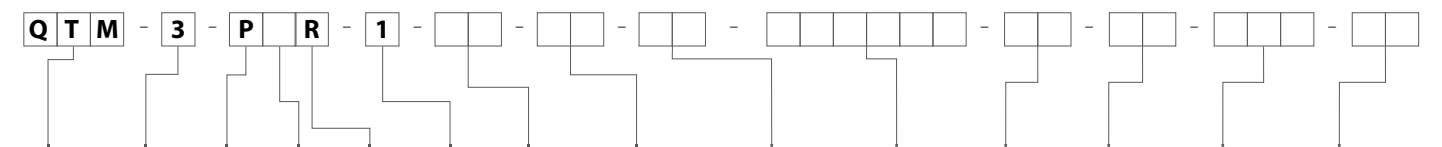

Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Pinhole Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
QTM 3	Ø75mm	P Pinhole Fixed	T Trim	R Round	1 Single	WH White	WH White	00 None	E50N G1	07 7.5W 600lm	MD 20°	T18 1800K - 4000K CRI>95	DA DALI
			L Trim-less			BK Black	BK Black	SE Soft Edge Lens			FL 35°		CA Casambi
								LS Linear Spread Lens			WF 60°	T27 2700K - 6500K CRI>95	
								HC Honeycomb Louvre					
								HS Honeycomb + Soft Edge	E50P G1	12 12W 1000lm	MD 20°	T18 1800K - 4000K CRI>95	
								HL Honeycomb + Linear Spread Lens			FL 35°		
											WF 60°	T27 2700K - 6500K CRI>95	


QUANTUM MR16/GU10 Pinhole Adjustable

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options
- Lamp and control gear to be ordered separately


Trim



MR16

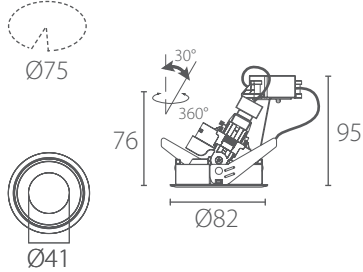


GU10




Trimless



MR16



GU10



Finish

Black Trim



Black

White Trim



White

Trimless




Black



White

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide



Q T M - 3 - J R - 1 - - - -									
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Pinhole Color	Accessories	Lamp Type*
QTM	3 Ø75mm	J Pinhole Adjustable	T Trim L Trimless	R Round	1 Single	WH White BK Black	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre HS Honeycomb + Soft Edge HL Honeycomb + Linear Spread Lens	M MR16 G GU10

*To be ordered separately

QUANTUM LED Module Pinhole Adjustable IP20

- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options

Trim





PC50

MD50

18W / H = 118
25W / H = 158

Trimless

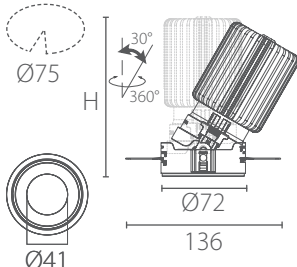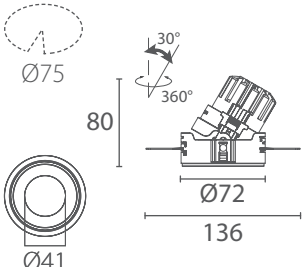

PC50

MD50

18W / H = 118
25W / H = 158

Finish

Black Trim



Black

White Trim



White

Trimless




Black



White

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

LED Module Type



PC50

900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K



MD50



1950 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K
2800 lm | 15°/24°/36°/ 60° | CRI>90 | 2700K/3000K/3500K/4000K

Order Guide																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
Q	T	M	-	3	-	J		R	-	1	-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-			-		

QUANTUM Tunable Pinhole Adjustable

IP20 LED


- Formed from engineering thermoplastic material with high temperature resistance and durability
- Available in trim and trimless version
- Available five reflector color options

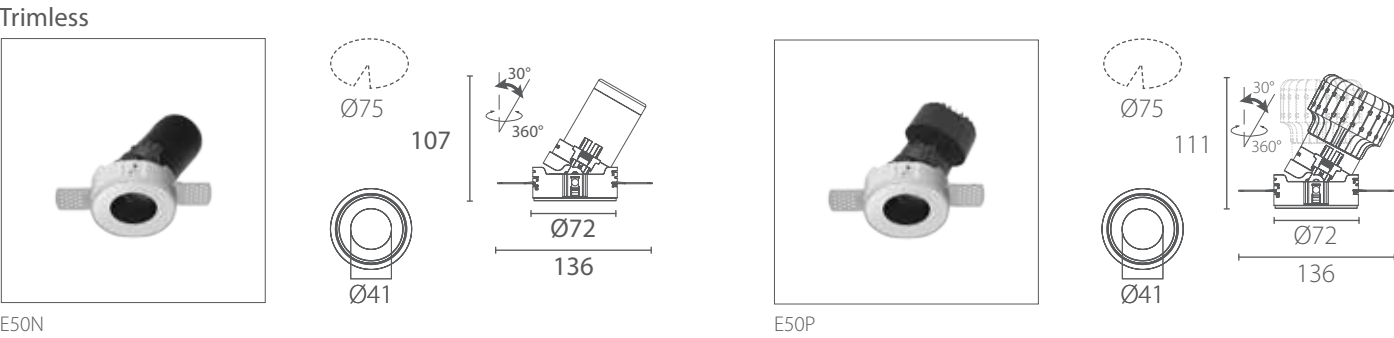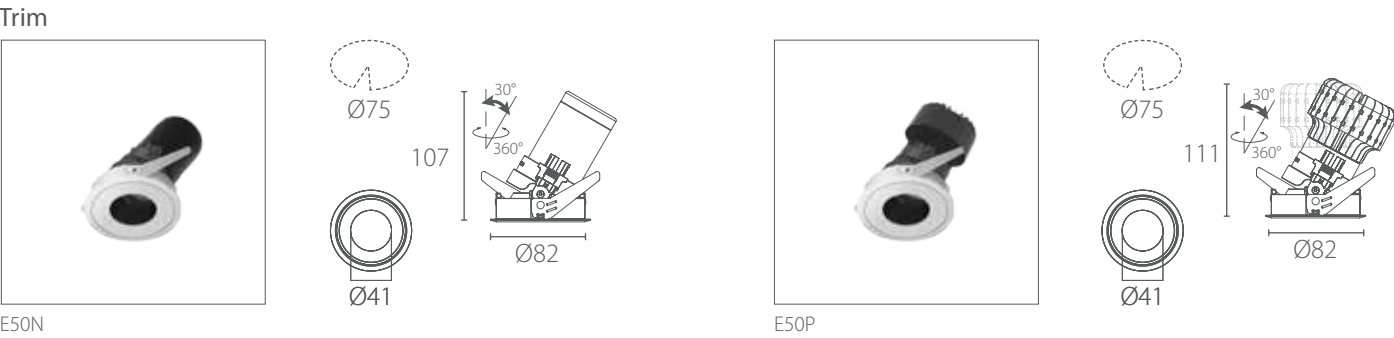

Finish



Accessories

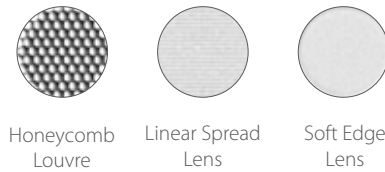

Tunable White



Order Guide


Q	T	M	-	3	-	J	R	-	1	-			-			-					-			-																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																																	
---	---	---	---	---	---	---	---	---	---	---	--	--	---	--	--	---	--	--	--	--	---	--	--	---	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--



Round 150
White Trim | Matt
18W | 2300 lm | 30° | 3000K

DORMUS

#Basic Downlight



Square



Round

DESIGNED FOR EYE COMFORT
The deep recessed downlight to achieve glare comfort.
Suitable for high ceiling architecture.

DORMUS 100 | Scale 1:1

Shape

- ☒ Round
- ☐ Square

Reflector


- ☐ White
- ☒ Black
- ☐ Matt



DORMUS Round 100

IP54 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request

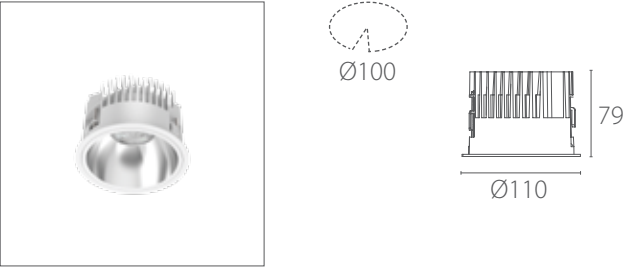

Wattage	Lumen		Lumen	
	30°	50° 3000K	30°	50° 4000K
	Source	System	Source	System
6.5W	940lm	800lm	1000lm	860lm
9W	1300lm	1100lm	1400lm	1200lm
13W	1800lm	1500lm	1900lm	1600lm

Finish

Black Trim



Order Guide

D R M - 4 - R - - - - -								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	4 Ø100mm	R Round	W White	WH White	06 6.5W 860lm	MD 30° WF 50°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut
			B Black	BL Black MT Matt				
					09 9W 1200lm			
					13 13W 1600lm			

DORMUS Round 150

IP54 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request



Wattage	Lumen		Lumen	
	30°	60° 3000K	30°	60° 4000K
	Source	System	Source	System
18W	2800lm	2300lm	3000lm	2500lm
25W	3800lm	3100lm	4000lm	3300lm

Finish

Black Trim




Order Guide

D R M - 6 - R - - - - -								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	6 Ø150mm	R Round	W White	WH White	18 18W 2500lm 25 25W 3300lm	MD 30° WF 60°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut
			B Black	BL Black MT Matt				

DORMUS Round 200

IP54 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request



Wattage	Lumen		Lumen	
	18° 30° 60° 3000K		18° 30° 60° 4000K	
	Source	System	Source	System
25W	3900lm	3200lm	4100lm	3400lm
38W	5400lm	4400lm	5600lm	4600lm
52W	6600lm	5400lm	6800lm	5000lm

Finish

Black Trim



White Trim


Order Guide

D R M - 8 - R - - - - - - -								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	8 Ø200mm	R Round	W White	WH White	25 25W 2500lm	SP 18°	830 3000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut
			B Black	BL Black		MD 30°		
			MT Matt	MT Matt		WF 60°		
					38 38W 3300lm		840 4000K CRI>80	
					52 52W 3300lm			

DORMUS Square 100

IP44 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request



Wattage	Lumen		Lumen	
	60° 3000K		60° 4000K	
	Source	System	Source	System
6.5W	790lm	650lm	860lm	680lm
9W	1100lm	900lm	1200lm	950lm
13W	1500lm	1200lm	1600lm	1300lm

Finish

Black Trim



White Trim


Order Guide

D R M - 4 - S - - - - - - -								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	4 Ø100mm	S Square	W White	WH White	06 6.5W 680lm	WF 60°	830 3000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut
			B Black	BL Black				
			MT Matt	MT Matt				
					09 9W 950lm		840 4000K CRI>80	
					13 13W 1300lm			

DORMUS Square 150

IP44 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request



Wattage	Lumen		Lumen	
	70° 3000K		70° 4000K	
	Source	System	Source	System
18W	2200lm	1800lm	2300lm	1900lm
25W	3000lm	2400lm	3200lm	2600lm

Finish

Black Trim



White



Black



Matt

White Trim



White



Black



Matt


Order Guide

D R M - 6 - S - W F 								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	6 Ø150mm	S Square	W White	WH White	18 18W 2500lm	WF 70°	830 3000K CRI>80	ND Non-dim
			B Black	BL Black			840 4000K CRI>80	AN 1-10V
				MT Matt	25 25W 3300lm			DA DALI
								PC Phase-Cut

DORMUS Square 200

IP44 LED

- Deep recessed design to achieve glare comfort
- Integrated heatsink for efficient heat dissipation
- Interchangeable reflector with various color options
- CRI>90 by request



Wattage	Lumen		Lumen	
	70° 3000K		70° 4000K	
	Source	System	Source	System
25W	3000lm	2400lm	3200lm	2600lm
38W	4200lm	3400lm	4400lm	3600lm

Finish

Black Trim



White



Black



Matt

White Trim



White




Black



Matt

Order Guide

D R M - 8 - S - W F 								
Product Code	Size	Trim Shape	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
DRM	8 Ø200mm	S Square	W White	WH White	25 25W 2600lm	WF 70°	830 3000K CRI>80	ND Non-dim
			B Black	BL Black			840 4000K CRI>80	AN 1-10V
				MT Matt	38 38W 3600lm			DA DALI
								PC Phase-Cut

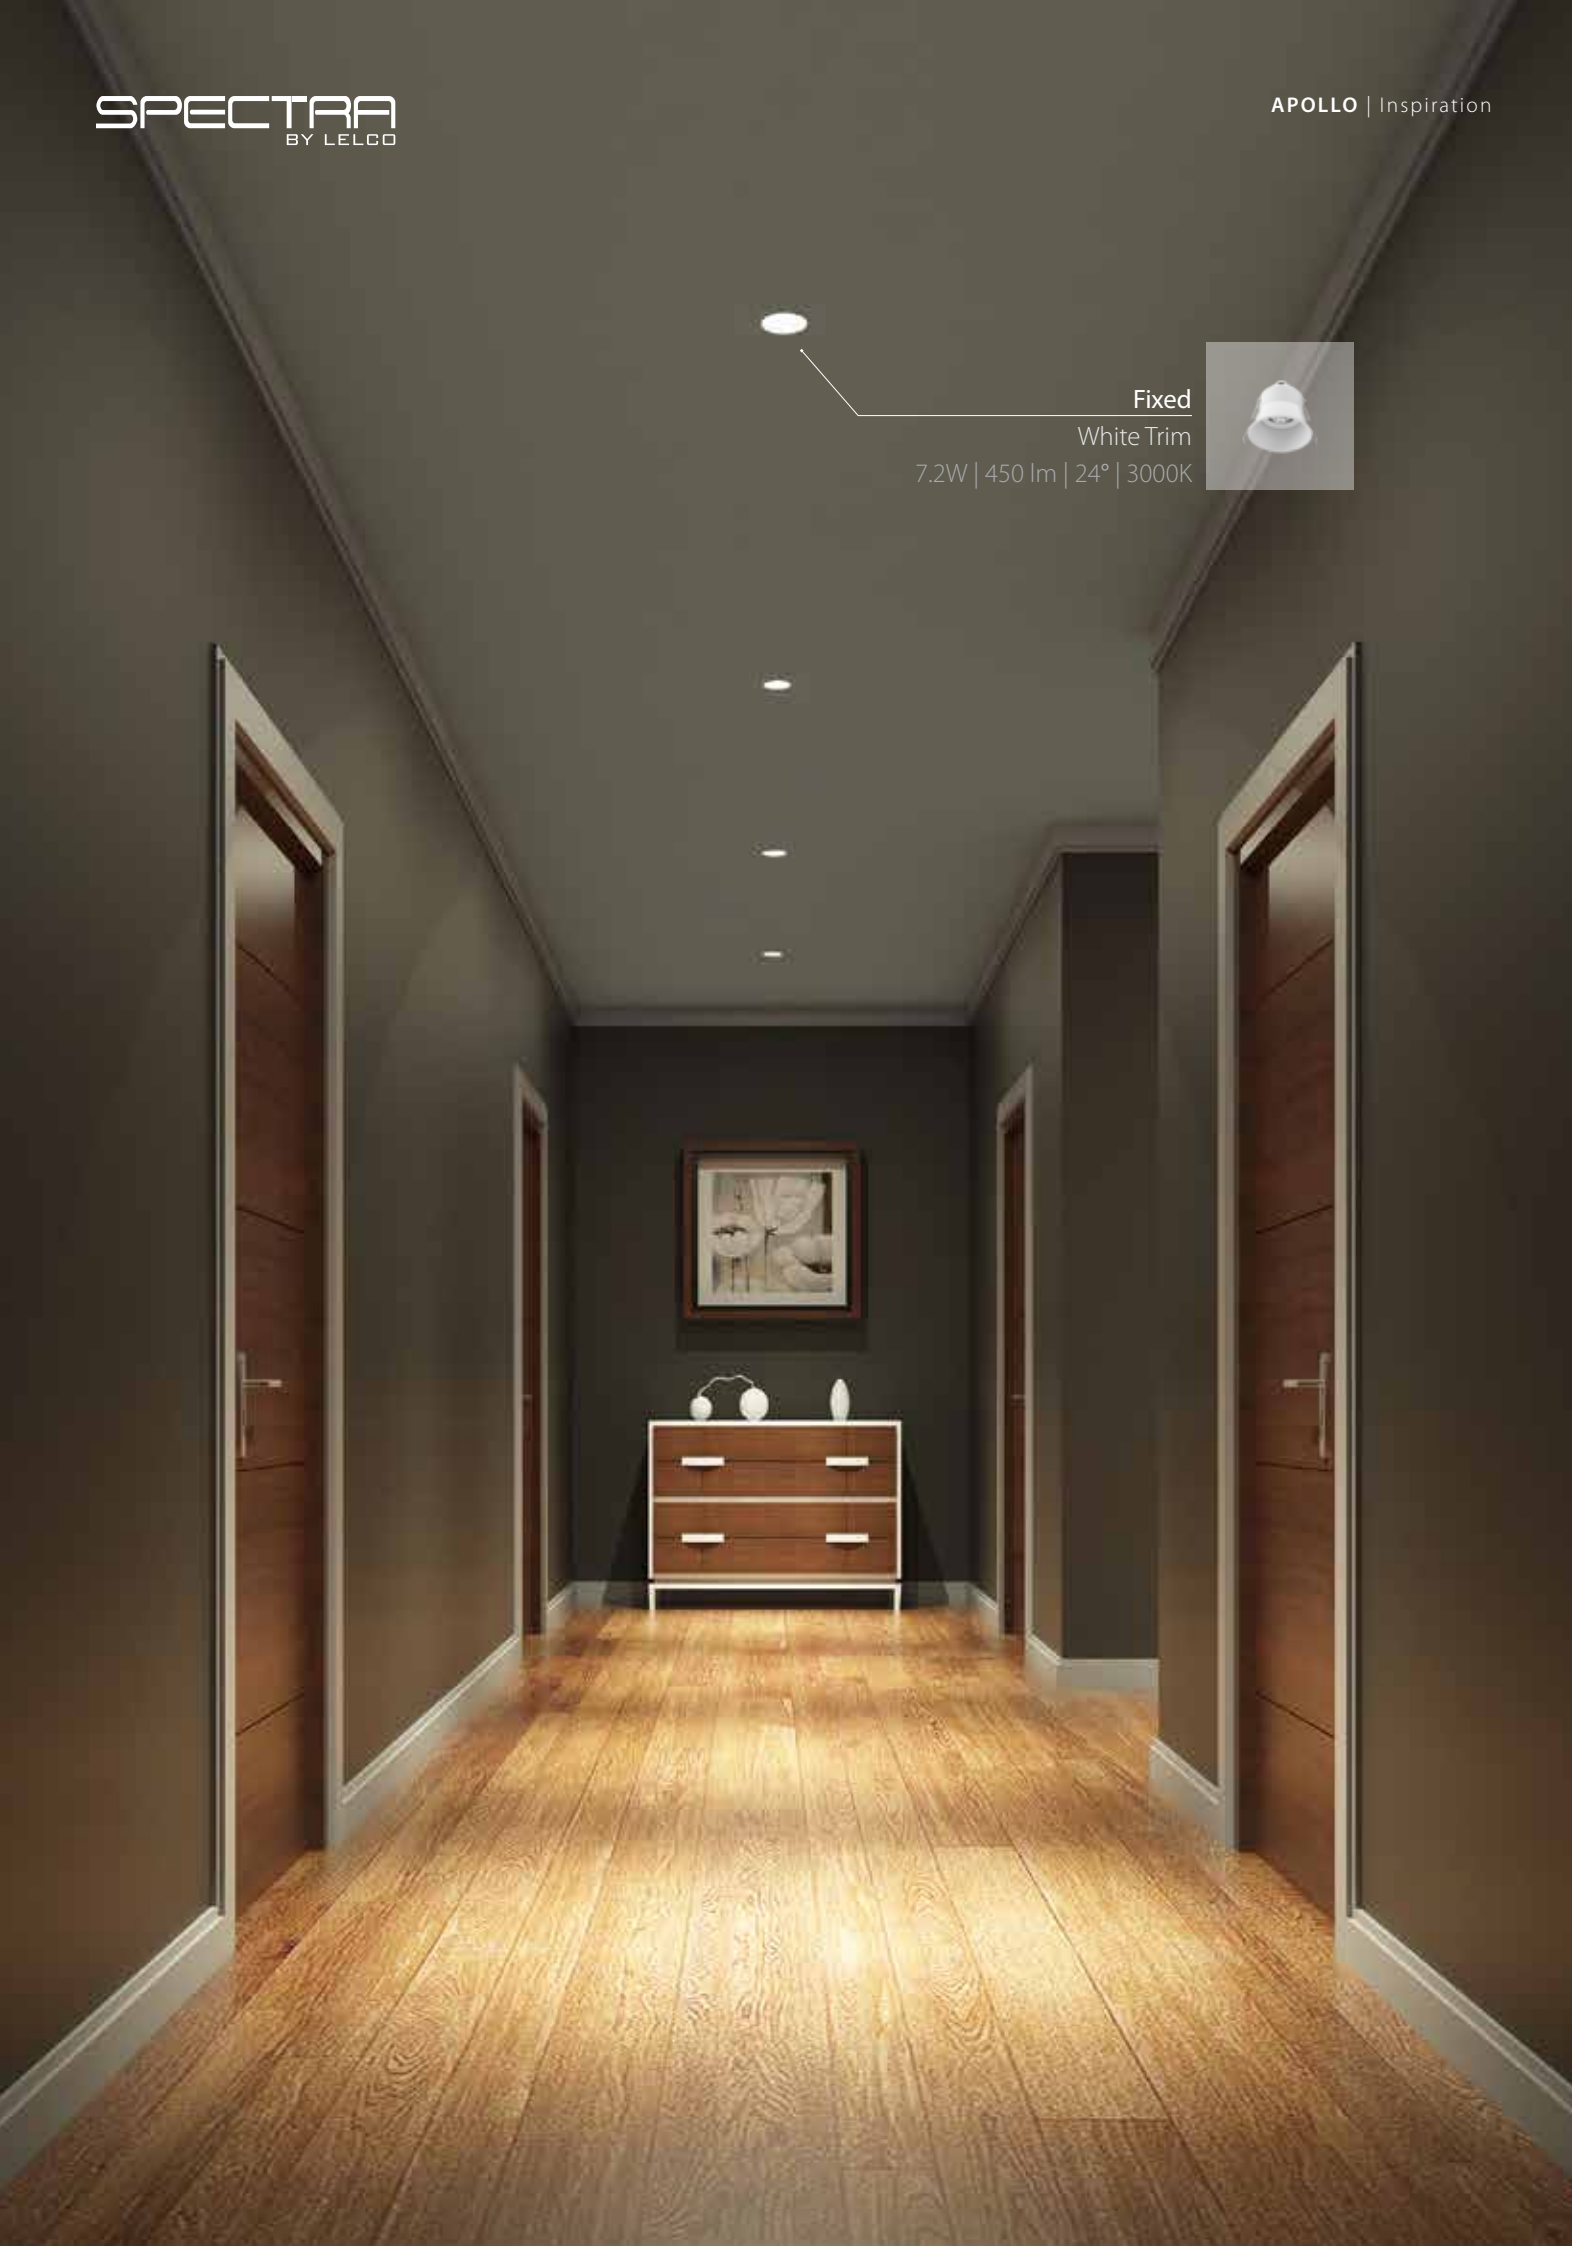

Fixed
White Trim
7.2W | 450 lm | 24° | 3000K



APOLLO


#Simple and Clean



SIMPLE & CLEAN DOWNLIGHT

Downlight with simple and clean design that fit for 3 type of lamp, MR16, GU10, and LED Module

APOLLO | Scale 1:1

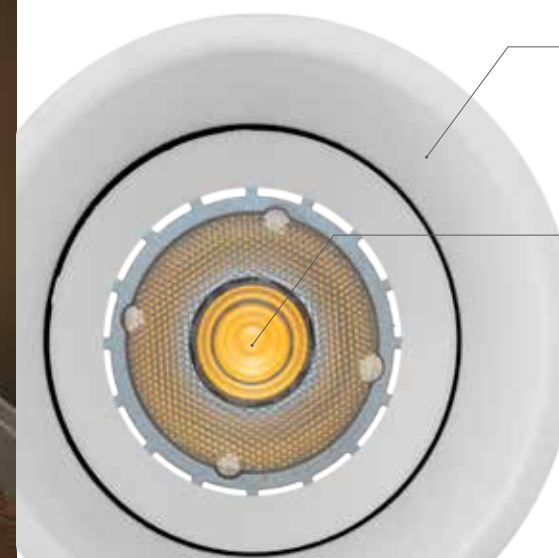

Finish

- White
- Black

Type of lamp

- MR16
- GU10
- LED Module


APOLLO MR16/GU10 Fixed

IP20/44 LED F


- Recessed ceiling downlight for MR16 and GU10
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately




MR16

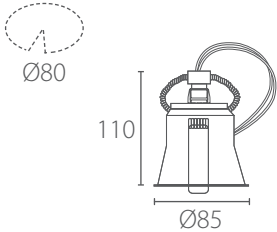


GU10

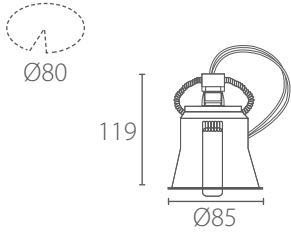

Finish



Accessories

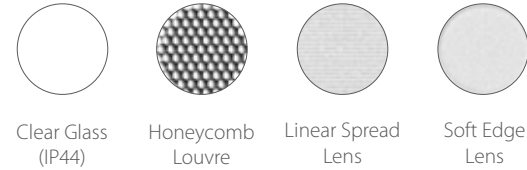

Order Guide

A P L - 3 - F - R - - -						
Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type*
APL	3 Ø80mm	F Fixed	R Round	WH White BL Black	00 None CG Clear Glass (IP44) SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10

*To be ordered separately


APOLLO Module Fixed

IP20/44 LED F


- Recessed ceiling downlight for LED module
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately




PC50

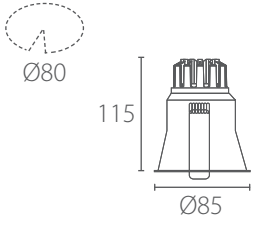

Finish



Accessories

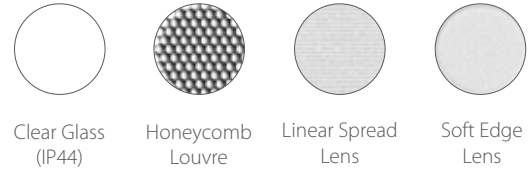

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Order Guide


A P L - 3 - F - R - - - - - - - -											
Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear	
APL	3 Ø80mm	F Fixed	R Round	WH White BL Black	00 None CG Clear Glass (IP44) SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
							13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80		

APOLLO MR16/GU10 Adjustable


- Recessed ceiling downlight for MR16 and GU10
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately




MR16

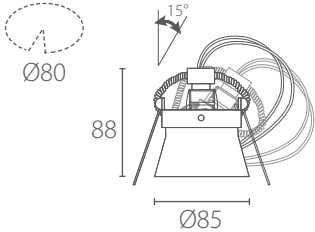


GU10




Finish



Accessories

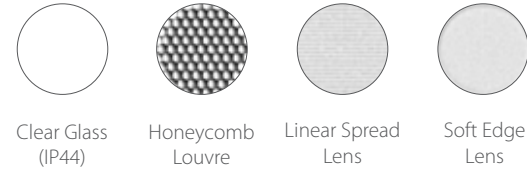

Order Guide

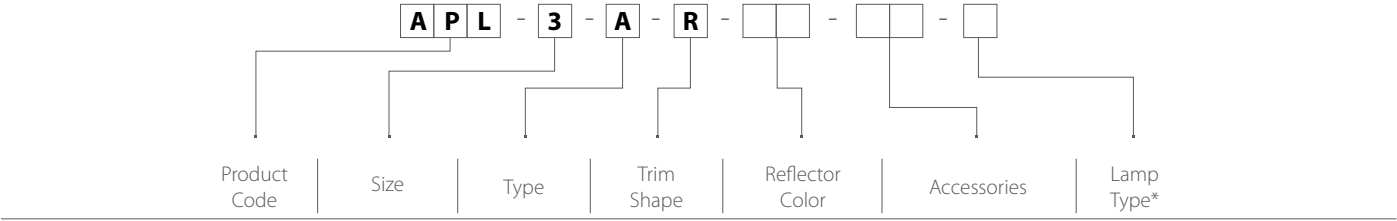

Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type*
APL	3 Ø80mm	A Adjustable	R Round	WH White BL Black	00 None CG Clear Glass (IP44) SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10


*To be ordered separately

APOLLO Module Adjustable


- Recessed ceiling downlight for LED module
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately




PC50



Finish



Accessories

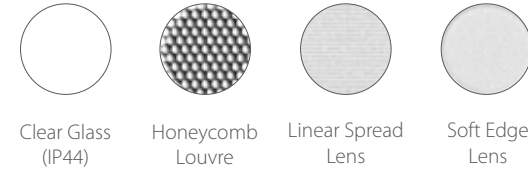


LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Order Guide

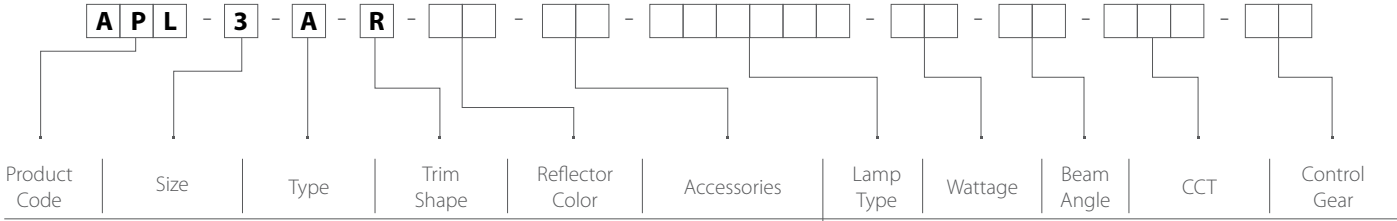


Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
APL	3 Ø80mm	A Adjustable	R Round	WH White BL Black	00 None CG Clear Glass (IP44) SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V 13 12.9W 1400lm 350mA 37V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90 830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi

APOLLO MR16/GU10 Fixed IP65


- Recessed ceiling downlight for MR16 and GU10
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately



MR16



GU10



Finish



White



Black

Accessories



Honeycomb
Louvre



Linear Spread
Lens



Soft Edge
Lens

Order Guide

A P L - **3** - **I** - **R** - - -

Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type*
APL	3 Ø75mm	I Fixed IP65	R Round	WH White BL Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10


*To be ordered separately

APOLLO Module Fixed IP65

- Recessed ceiling downlight for LED module
- Slim trim and body frame formed from high quality aluminum
- White or black powder-coated finish for trim
- Lamp and control gear to be ordered separately



PC50



Finish



White



Black

Accessories



Honeycomb
Louvre



Linear Spread
Lens



Soft Edge
Lens

LED Module Type



PC50

900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Order Guide


A P L - **3** - **I** - **R** - - - - - - - - - - - -

Product Code	Size	Type	Trim Shape	Reflector Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
APL	3 Ø75mm	I Fixed IP65	R Round	WH White BL Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
							13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	

ADAPT

#Modular Downlight

Wallwasher 100 Round
White Trim | Matt
13W | 1100 lm | 28° | 2700K

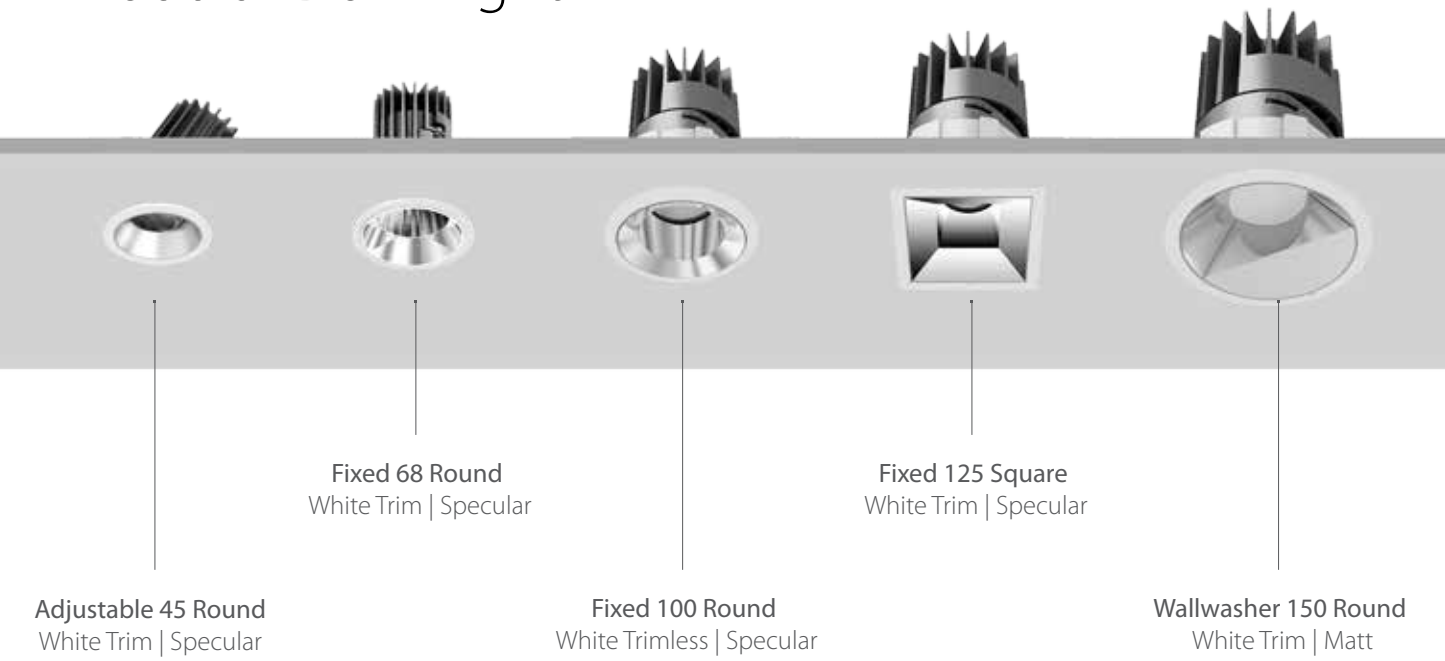

Trim

- ☐ White Trim
- ☒ Black Trim
- ☐ Trimless

Reflector

- ☒ Specular
- ☐ Matt
- ☐ Black
- ☐ White
- ☐ Gold
- ☐ Dark Specular

ADAPT 100 | Scale 1:1



Product Name	ADAPT Fixed							ADAPT Adjustable				
Trim Type	 Round TrimRound TrimlessSquare TrimSquare Trimless							 Round TrimRound Trimless				
Cut Out												
												
Trim Diameter & Height	Ø77 H:100	Ø110 H:126	Ø137 H:157	Ø162 H:188	100x100 H:126	125x125 H:157	150x150 H:188	Ø55 H:60	Ø78 H:98	Ø110 H:128	Ø137 H:159	Ø162 H:190
Wattage & Luminous Flux	13W 1200lm	13W 950lm	18W 1500lm	25W 2000lm	13W 950lm	18W 1500lm	25W 2000lm	4W 380lm	7.5W 650lm	13W 900lm	18W 1400lm	25W 1900lm
	18W 1600lm	18W 1300lm	25W 1900lm	38W 2900lm	18W 1300lm	25W 1900lm	38W 2900lm		8.5W 380lm	18W 1200lm	25W 1800lm	38W 2700lm
Beam Angle	18°	24°	28°	28°	24°	28°	28°	18°	10°	24°	20°	20°
	40°	35° 50°	40° 50°	32° 50°	35° 50°	40° 50°	32° 50°	24° 35° 40°	24° 40° 60°	35° 50°	40° 50°	35° 50°
CCT	2700K (by request) 3000K 4000K											
CRI	CRI>90											
Trim Color	 BlackWhiteTrimlessBlackWhiteTrimless											
Reflector Color	 SpecularMattWhiteBlackGoldDark Specular											
Accessories	 Red/Blue/Yellow/Green Color Film							 Honeycomb Louvre				
Driver	Non-Dim 1-10V DALI Phase-Cut Casambi											

ADAPT Adjustable					ADAPT Wallwasher						
 Square TrimSquare Trimless					 Round TrimRound TrimlessSquare TrimSquare Trimless						
 45x4568x6896x96122x122147x147 					 Ø68Ø100Ø125Ø15096x96122x122147x147 						
55x5578x78110x110134x134159x159 H:60H:98H:129H:160H:191					Ø77Ø110Ø137Ø162107x107134x134159x159 H:100H:128H:159H:190H:129H:160H:191						
4W7.5W13W18W25W 380lm650lm900lm1400lm1900lm 8.5W18W25W38W 380lm1200lm1800lm2700lm 11W 850lm					13W13W18W25W13W18W25W 750lm520lm800lm1100lm520lm800lm1100lm 18W18W25W38W18W25W38W 1000lm700lm1100lm1500lm700lm1100lm1500lm						
18°10°24°20°20° 24°24°35°40°35° 35°40°50°50°50° 40°60°					Wallwasher						
2700K (by request) 3000K 4000K											
CRI>90											
 BlackWhiteTrimlessBlackWhiteTrimless											
 SpecularMattWhiteBlackGoldDark Specular						 Matt					
 Honeycomb Louvre											
Non-Dim 1-10V DALI Phase-Cut Casambi											


EASY TO ADJUST

Precision adjustment mechanism achieves accurate angle alignment.



Adjustable fixing screws mechanism for different ceiling thickness

Installed easily and securely in the ceiling, using two screw fixing mechanisms. Can be installed in 12-25mm thickness ceiling and in 1-12mm thickness ceiling with an unfolded fixing screw mechanism.

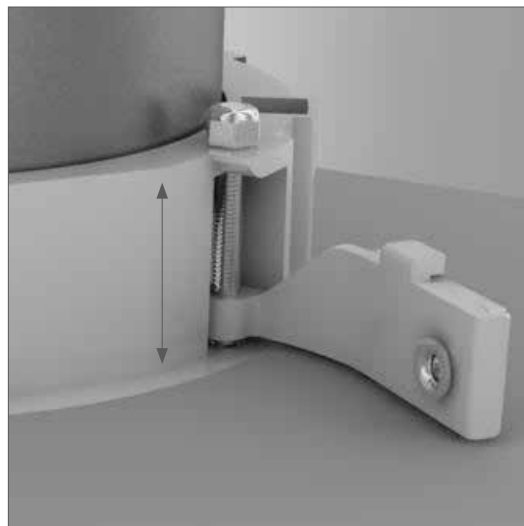


Fits 12mm to 25mm ceiling thickness




Fits 1mm to 12mm ceiling thickness


ONE DOWNLIGHT, THREE FUNCTION

Adapt modular downlight is designed with interchangeability in mind. ONE downlight to serve different applications.

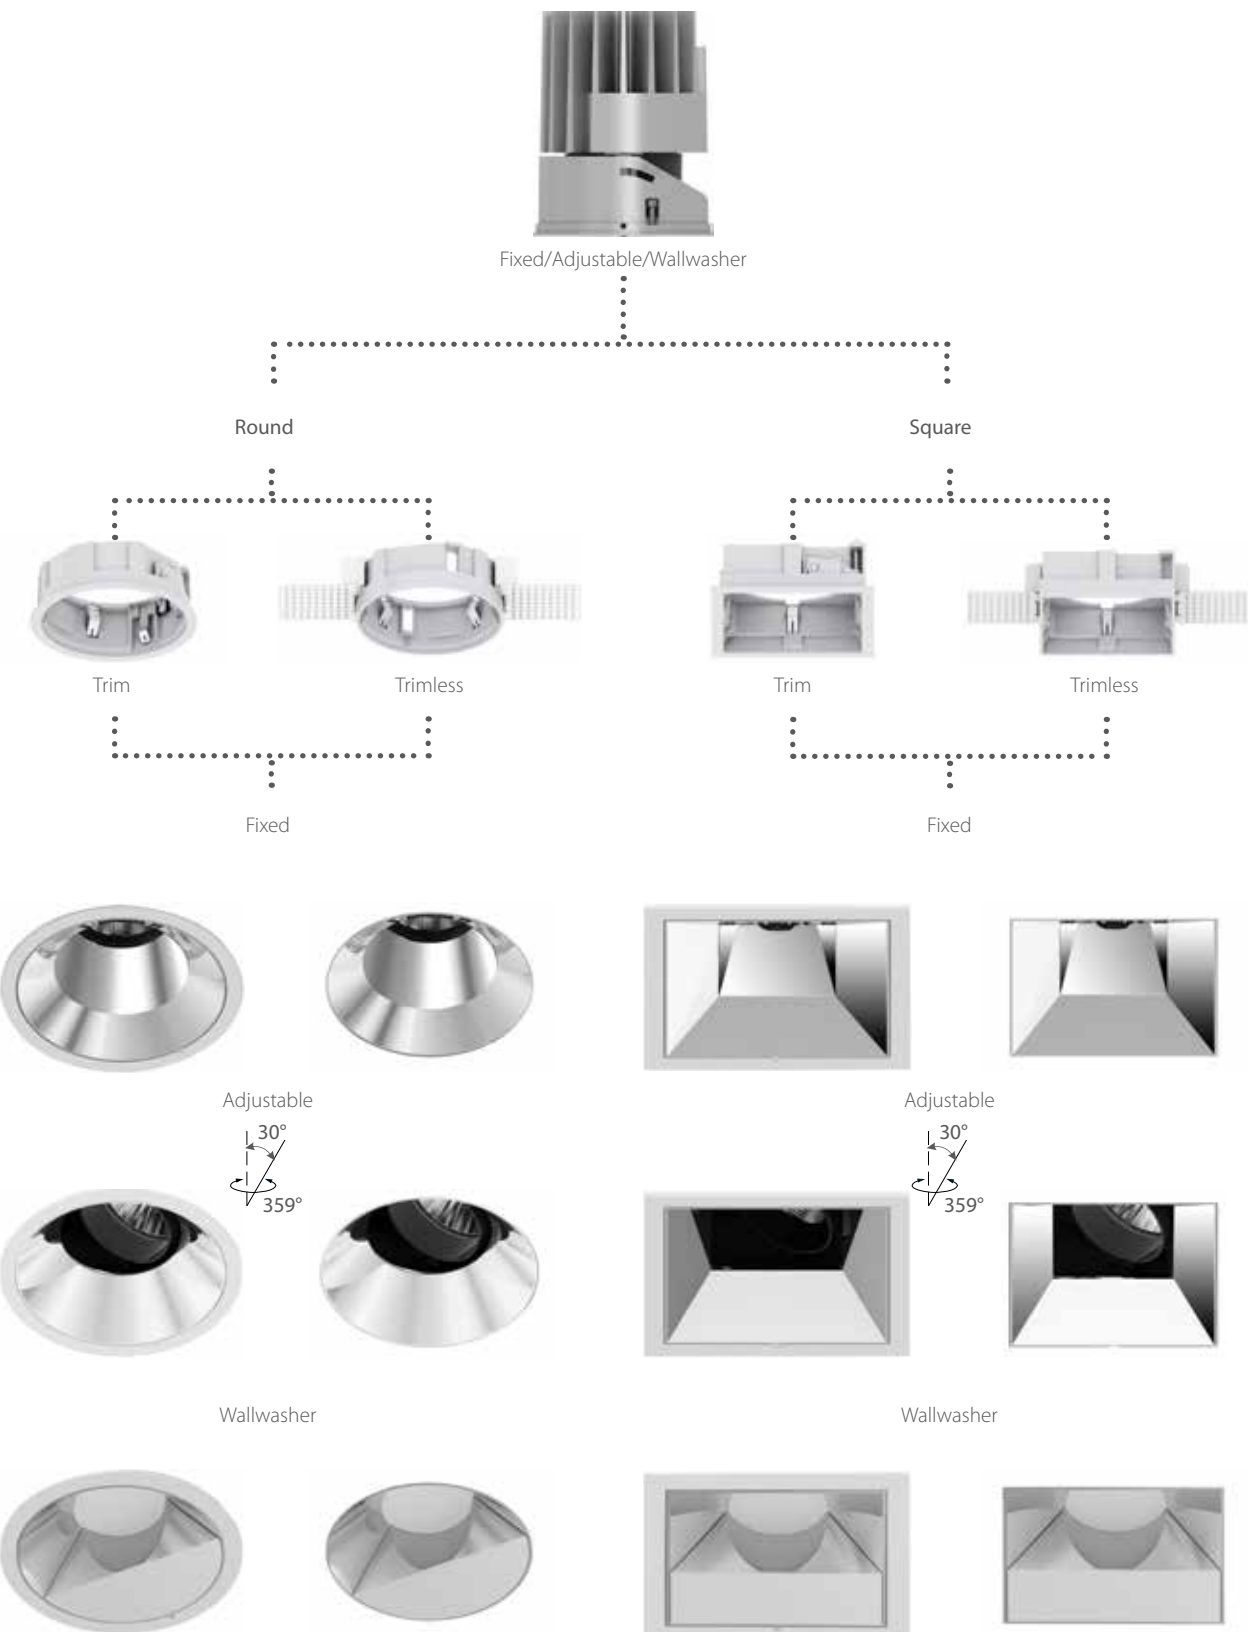

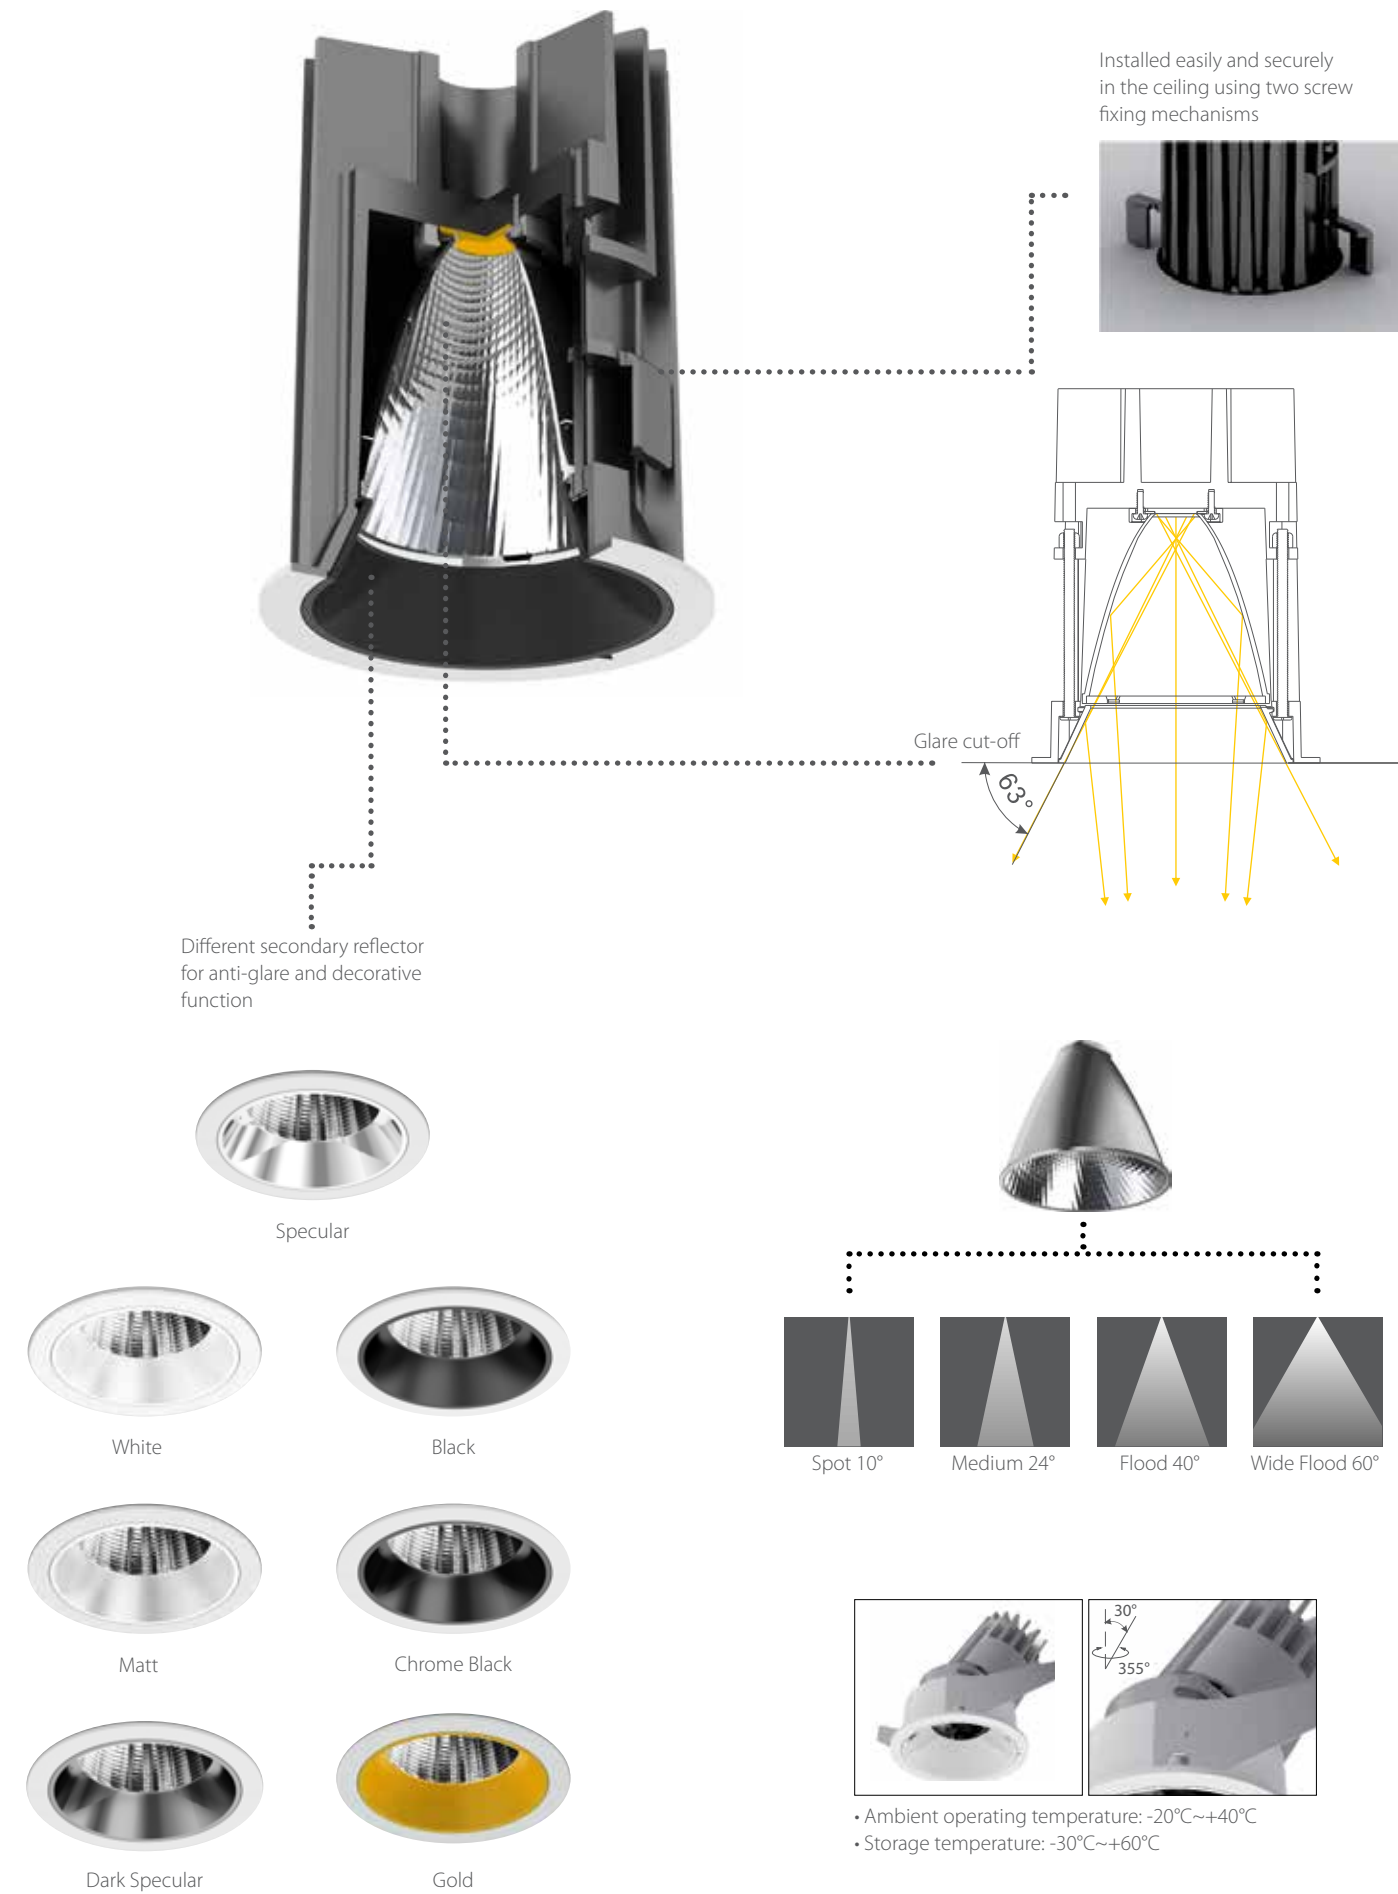

ADAPT Part Breakdown


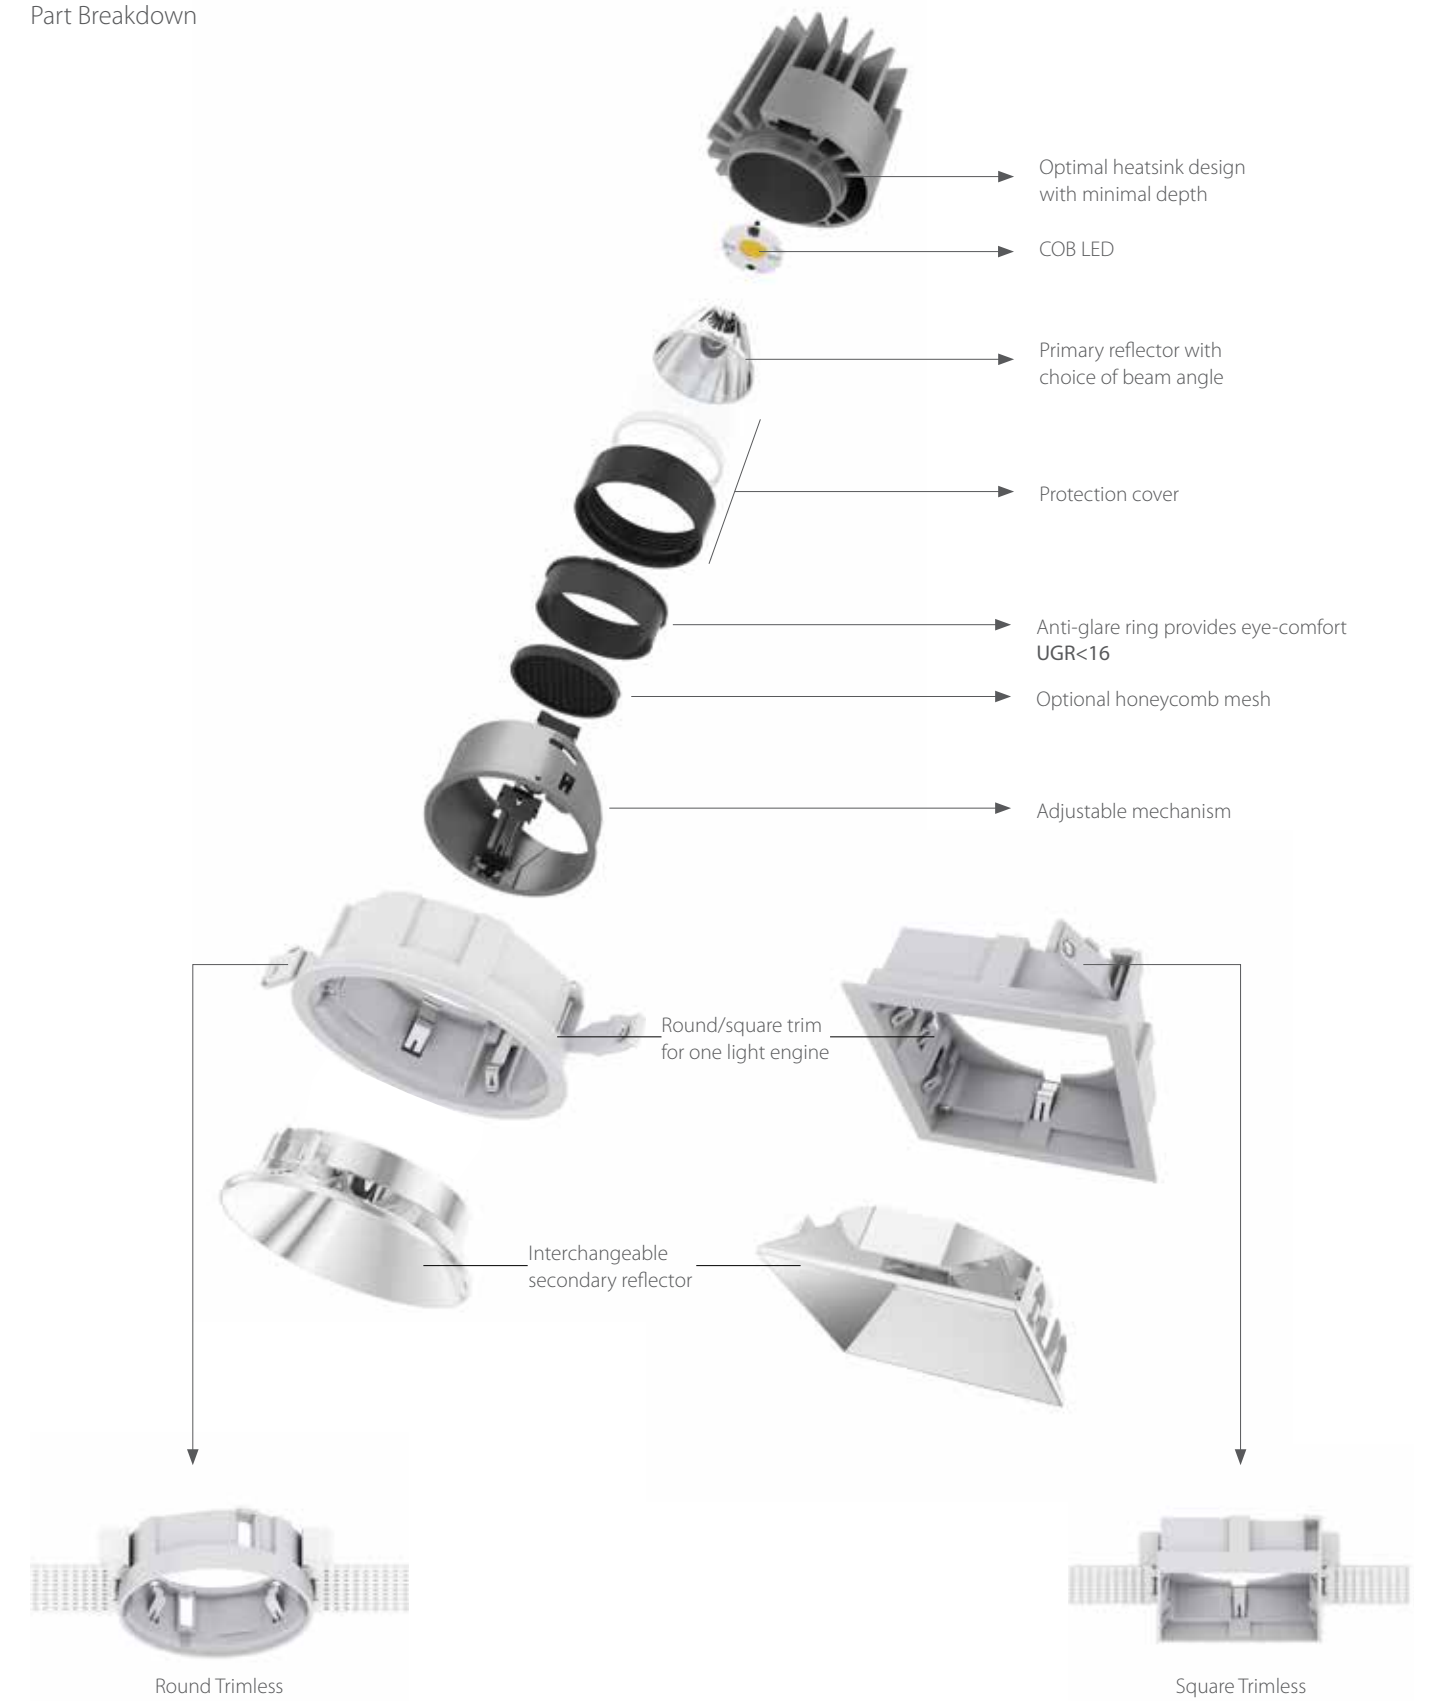


ADAPT 68 Fixed Round

IP44 LED


- Miniaturized LED downlight for high performance accent lighting
- Precise light distribution with no stray light and excellent glare control thanks to optimized optic with double reflectors
- Three different beam angle with different primary reflectors
- Five secondary reflector for anti-glare and decorative functions
- Installed easily and securely in the ceiling using two screw fixing mechanisms
- CRI>90

Trim

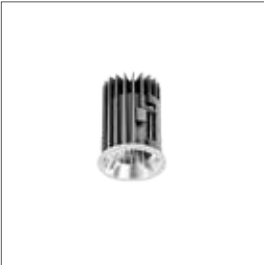


Finish

Black Trim

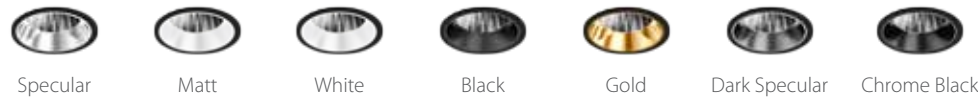

White Trim



Accessories



Wattage	Lumen		Lumen	
	18° 40°	3000K	18° 40°	4000K
	Source	System	Source	System
13W	1400lm	1100lm	1500lm	1200lm
18W	1900lm	1500lm	2000lm	1600lm

Order Guide

A D P - 3 - F T R - 1 - - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	3 Ø68mm	F Fixed	T Trim	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	13 13W 1200lm 350mA 31V 18 18W 1600lm 500mA 36V	MD 18° WF 40°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request


*by request

ADAPT 100 Fixed Round


IP44 LED

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim



Trimless



Finish


Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 35° 50° 3000K		28° 35° 50° 4000K	
	Source	System	Source	System
13W	1300lm	900lm	1400lm	950lm
18W	1700lm	1200lm	1800lm	1300lm

Order Guide

A D P - 4 - F R - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	4 Ø100mm	F Fixed	T Trim L Trim-less	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	13 13W 950lm 350mA 36V 18 18W 1300lm 500mA 36V	MD 28° FL 35° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request


*by request

ADAPT 125 Fixed Round


IP44 LED

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim

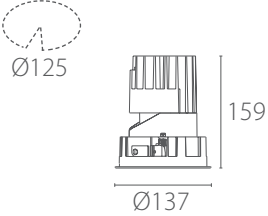

Trimless



Finish


Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 40° 50° 3000K		28° 40° 50° 4000K	
	Source	System	Source	System
18W	2000lm	1400lm	2100m	1500lm
25W	2600lm	1800lm	2700lm	1900lm

Order Guide

A D P - 5 - F R - 1 - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5 Ø125mm	F Fixed	T Trim L Trim-less	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	18 18W 1500lm 500mA 36V 25 25W 1900lm 700mA 36V	MD 28° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request


*by request

ADAPT 150 Fixed Round


IP44 LED

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim



Trimless



Finish


Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 32° 50° 3000K		28° 32° 50° 4000K	
	Source	System	Source	System
25W	2700lm	1900lm	2800lm	2000lm
38W	3700lm	2700lm	3900lm	2900lm

Order Guide

A D P - 6 - F R - 1 - - - - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	6 Ø150mm	F Fixed	T Trim L Trim-less	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	25 25W 2000lm 700mA 36V 38 38W 2900lm 1050mA 36V	MD 28° FL 32° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request


*by request

ADAPT 45 Adjustable Round


IP44 LED

- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation
- CRI>90

Trim



Accessories



Honeycomb Louvre

Wattage	Lumen				Lumen			
	18°	24°	35°	50°	18°	24°	35°	50°
4W	3000K				4000K			
	Source	System			Source	System		
	500lm	350lm			550lm	380lm		

Order Guide


A D P - 1 - A T R - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	1 Ø45mm	A Adjustable	T Trim	R Round	1 Single	WH White	SP Specular	00 None	04 4W 380lm 350mA 12V	SP 18° MD 24° FL 35° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
						BK Black	MT Matt						
							WH White						
							BK Black						
							GD Gold						
							DS Dark Specular						
							CB Chrome Black						
*by request													

Finish

Black Trim



White Trim




ADAPT 68 Adjustable Round

IP44

LED

- Full range of adjustable downlight, with LED wattage 7.5W, 8.5W,and 11W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90


Trim

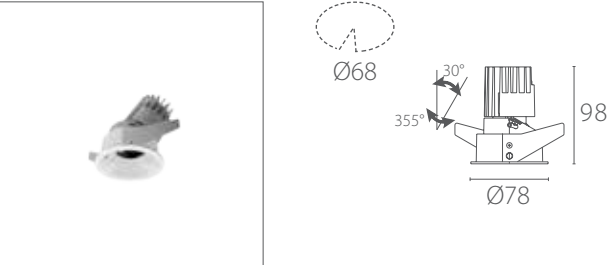

Trimless



Finish

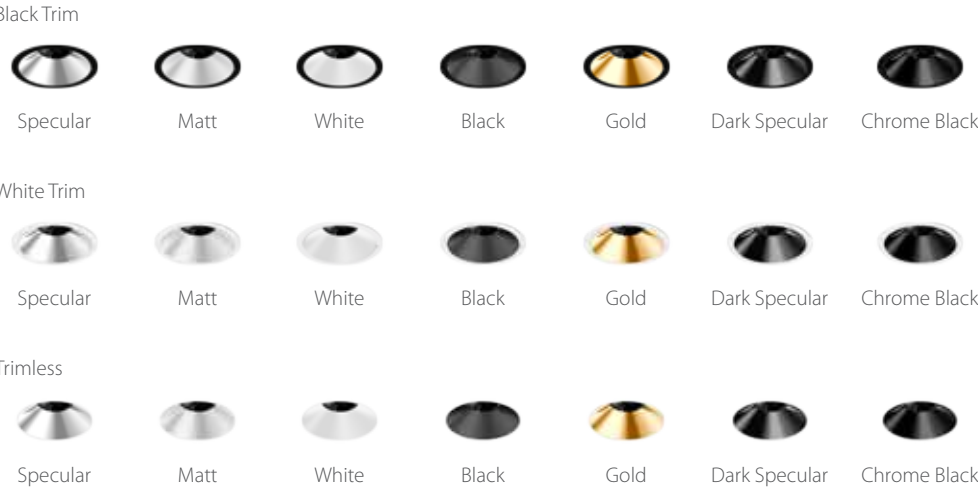

Accessories



Wattage	Lumen		Lumen	
	10° 24° 40° 55° 3000K		10° 24° 40° 55° 4000K	
	Source	System	Source	System
7.5W	850lm	600lm	900lm	650lm
8.5W	600m	350lm	650lm	380lm
11W	1100lm	800lm	1200lm	850lm

Order Guide


A D P - 3 - A R - 1 - - - - - -														
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear		
ADP	3 Ø68mm	A Adjustable	T Trimless	R Round	1 Single	WH White	SP Specular	00 None	07 7.5W 650lm 250mA 31V	MD 24° FL 40° WF 55°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi		
						BK Black	MT Matt							
							WH White							
							BK Black							
							GD Gold							
							DS Dark Specular		08 8.5W 380lm 700mA 12V	SP 10°				
							CB Chrome Black							
									11 11W 850lm 350mA 31V	MD 24° FL 40° WF 55°				
*by request														

ADAPT 100 Adjustable Round


IP44 LED

- Full range of adjustable downlight, three sizes with LED wattages 13W-18W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim

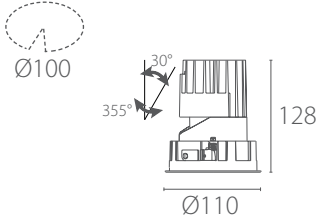


Trimless

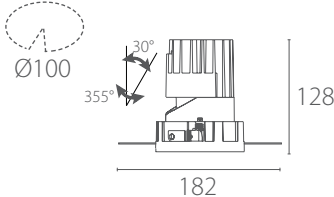


Finish


Black Trim

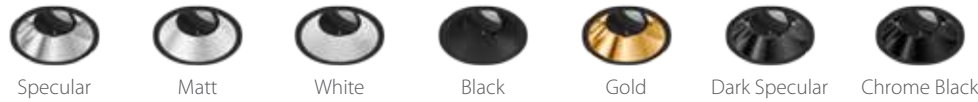


White Trim

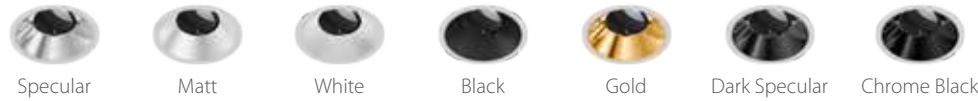

Trimless

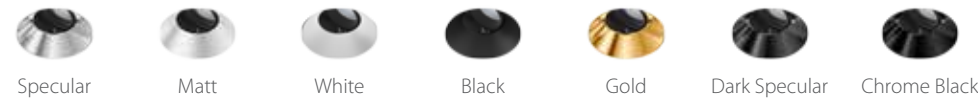

Accessories



Honeycomb Louvre

Wattage	Lumen		Lumen	
	20° 40° 50° 3000K		20° 40° 50° 4000K	
	Source	System	Source	System
13W	1300lm	850lm	1400m	900lm
18W	1700lm	1100lm	1800lm	1200lm

Order Guide


A D P - 4 - A R - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	4 Ø100mm	A Adjustable	T Trim L Trim-less	R Round	1 Single	WH White	SP Specular	00 None	13 13W 900lm 350mA 36V	MD 20° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
						BK Black	MT Matt	HC Honeycomb Louvre					
							WH White						
							BK Black						
							GD Gold						
							DS Dark Specular		18 18W 1200lm 500mA 36V				
							CB Chrome Black						
*by request													

ADAPT 125 Adjustable Round


 IP44 LED

- Full range of adjustable downlight, three sizes with LED wattages 13W-18W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim

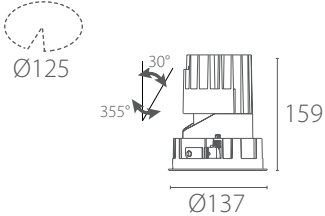


Trimless




Finish


Black Trim

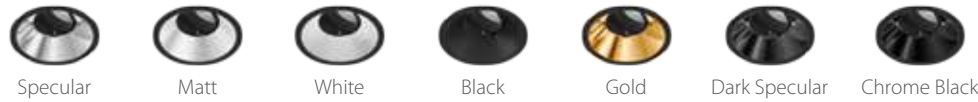


White Trim

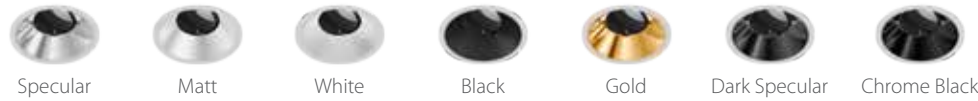

Trimless

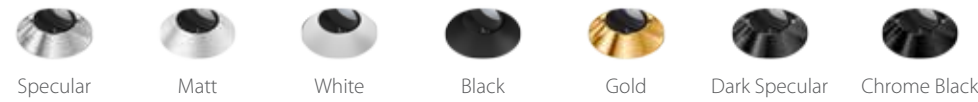

Accessories



Honeycomb Louvre

Wattage	Lumen		Lumen	
	20° 40° 50° 3000K		20° 40° 50° 4000K	
	Source	System	Source	System
18W	2000lm	1300lm	2100lm	1400lm
25W	2600lm	1700lm	2700lm	1800lm

Order Guide

A D P - 5 - A R - 1 - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5 Ø125mm	A Adjustable	T Trim L Trimless	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None HC Honeycomb Louvre	18 18W 1400lm 500mA 36V 25 25W 1800lm 700mA 36V	MD 20° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request

*by request


ADAPT 150 Adjustable Round

IP44


LED

- Full range of adjustable downlight, three sizes with LED wattages 25W and 38W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90


Trim

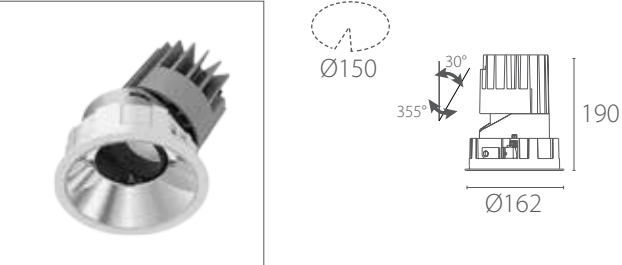

Trimless

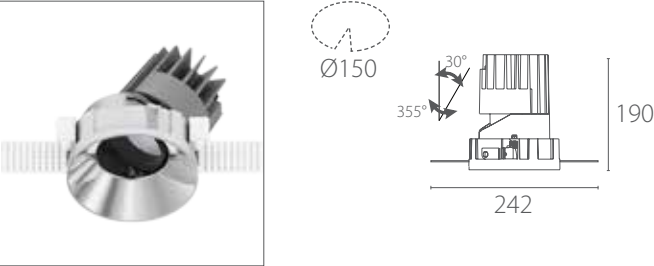

Finish

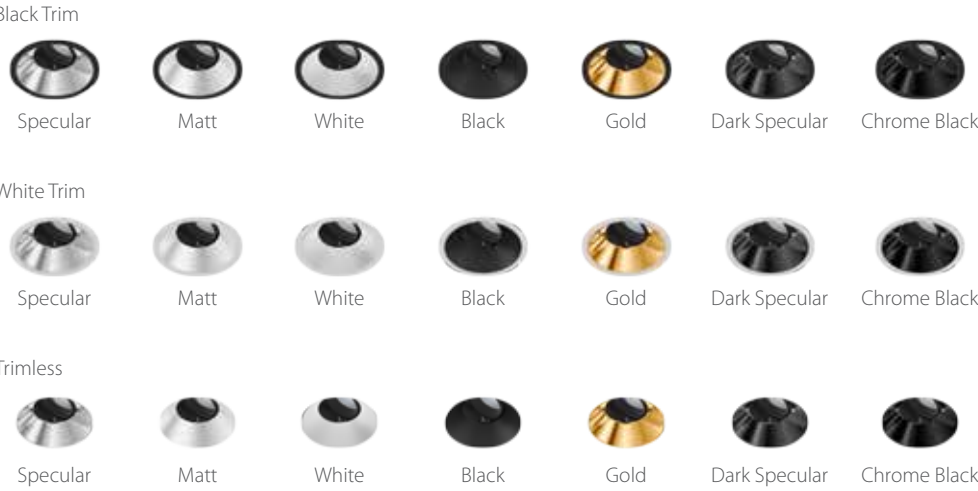

Accessories



Wattage	Lumen		Lumen	
	20° 35° 50° 3000K		20° 35° 50° 3000K	
	Source	System	Source	System
25W	2700lm	1800lm	2800m	1900lm
38W	3700lm	2500lm	3900lm	2700lm

Order Guide

A D P - 6 - A R - 1 - - - - - - -												
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear
ADP	6 Ø150mm	A Adjustable	T Trim L Trimless	R Round	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None HC Honeycomb Louvre	25 25W 1900lm 700mA 36V 38 38W 2700lm 1050mA 36V	MD 20° FL 35° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi


*by request

ADAPT 68 Wallwasher Round


IP44 LED

- Powerful LED engine 13W at 350mA and 18W at 500mA
- Precise light distribution with no stray light and excellent glare control thanks to optimized optic with double reflectors
- Installed easily and securely in the ceiling using two screw fixing mechanisms
- CRI>90

Trim

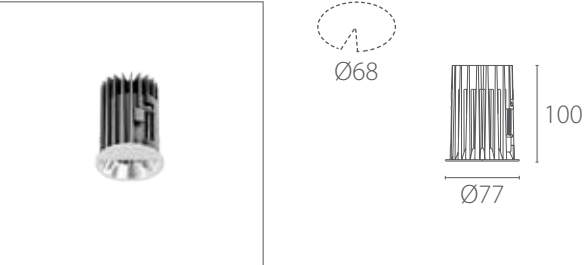

Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
13W	1400lm	680lm	1500lm	750lm
18W	1900lm	900lm	2000lm	1000lm

Order Guide

A D P - 3 - W T R - 1 - - M T - 0 0 - - W W - - -															
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear			
ADP	3 Ø68mm	W Wall-washer	T Trim	R Round	1 Single	WH White BK Black	MT Matt	00 None	13	13W 750lm	WW Wall-washer	927	2700K* CRI>90	ND	Non-dim
										350mA 36V		930	3000K CRI>90	AN	1-10V
												940	4000K CRI>90	DA	DALI
														PC	Phase-Cut
									18	18W 1000lm				CA	Casambi
										500mA 36V					

*by request


*by request

ADAPT 100 Wallwasher Round


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim

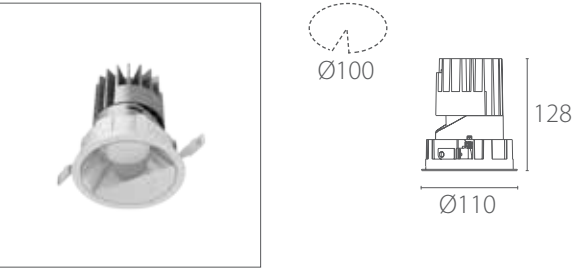

Trimless

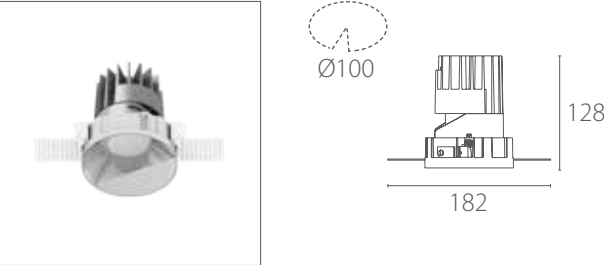

Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
13W	1300lm	480lm	1400lm	520lm
18W	1700lm	650lm	1800lm	700lm

Order Guide

A D P - 4 - W R - 1 - M T - 0 0 - W W - -															
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear			
ADP	4 Ø100mm	W Wall-washer	T Trim	R Round	1 Single	WH White	MT Matt	00 None	13	13W 520lm	WW Wall-washer	927	2700K* CRI>90	ND	Non-dim
			L Trim-less							350mA 36V		930	3000K CRI>90	AN	1-10V
												940	4000K CRI>90	DA	DALI
													PC	Phase-Cut	
									18	18W 700lm				CA	Casambi
										500mA 36V					

*by request


*by request

ADAPT 125 Wallwasher Round


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim

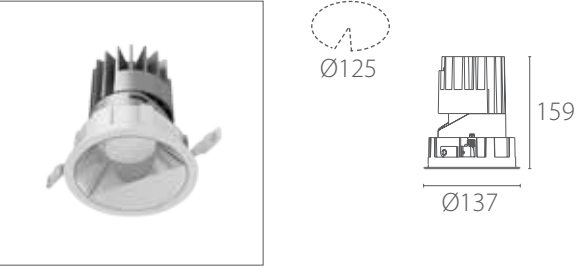

Trimless

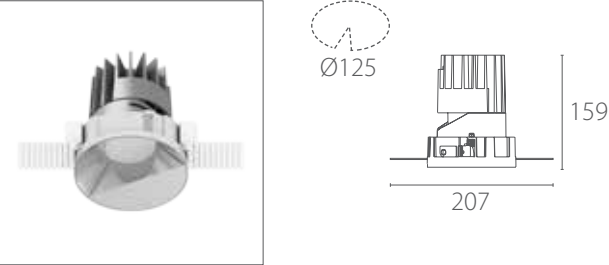

Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
18W	2000lm	750lm	2100m	800lm
25W	2600lm	1000lm	2700lm	1100lm

Order Guide

A D P - 5 - W R - 1 - - - M T - 0 0 - - - W W - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5 Ø125mm	W Wall-washer	T Trim L Trim-less	R Round	1 Single	WH White BK Black	MT Matt	00 None	18 18W 800lm	WW Wall-washer	927 2700K* CRI>90	ND Non-dim	
									500mA 36V		930 3000K CRI>90	AN 1-10V	
											940 4000K CRI>90	DA DALI	
												PC Phase-Cut	
									25 25W 1100lm			CA Casambi	
									700mA 36V				

*by request

*by request

ADAPT 150 Wallwasher Round


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim



Trimless

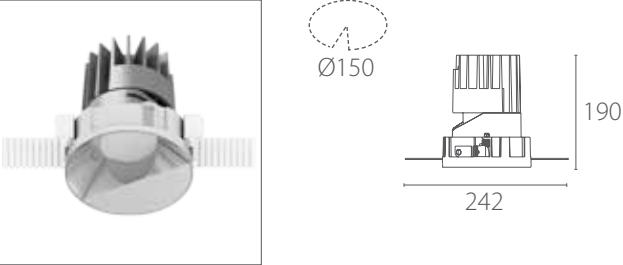

Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
25W	2700lm	1000lm	2800lm	1100lm
38W	3700lm	1400lm	3900lm	1500lm

Order Guide

A D P - 6 - W R - 1 - M T - 0 0 - W W - -															
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear			
ADP	6 Ø150mm	W Wall-washer	T Trim	R Round	1 Single	WH White	MT Matt	00 None	25	25W 1100lm	WW Wall-washer	927	2700K* CRI>90	ND	Non-dim
			L Trim-less							700mA 36V		930	3000K CRI>90	AN	1-10V
												940	4000K CRI>90	DA	DALI
													PC	Phase-Cut	
									38	38W 1500lm 1050mA 36V			CA	Casambi	

*by request


*by request

ADAPT 100 Fixed Square



IP44 LED F

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim



Trimless



Finish

Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 35° 50° 3000K		28° 35° 50° 4000K	
	Source	System	Source	System
13W	1300lm	900lm	1400lm	950lm
18W	1700lm	1200lm	1800lm	1300lm

Order Guide

A D P - 4 - F S - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	4 96x96 mm	F Fixed	T Trim L Trim-less	S Square	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	13 13W 950lm 350mA 36V 18 18W 1300lm 500mA 36V	MD 28° FL 35° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	

*by request


*by request

ADAPT 125 Fixed Square


IP44 LED

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim



Trimless



Finish

Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 40° 50° 3000K		28° 40° 50° 4000K	
	Source	System	Source	System
18W	2000lm	1400lm	2100m	1500lm
25W	2600lm	1800lm	2700lm	1900lm

Order Guide

A D P - 5 - F S - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5 122x122 mm	F Fixed	T Trim L Trim-less	S Square	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	18 18W 1500lm 500mA 36V	MD 28° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
									25 25W 1900lm 700mA 36V				

*by request


*by request

ADAPT 150 Fixed Square


IP44 LED

- Deep recessed secondary reflector and soft lens enhance visual comfort
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum eye comfort
- CRI>90

Trim



Trimless



Finish

Black Trim



White Trim



Trimless



Accessories



Wattage	Lumen		Lumen	
	28° 32° 50° 3000K		28° 32° 50° 4000K	
	Source	System	Source	System
25W	2700lm	1900lm	2800lm	2000lm
38W	3700lm	2700lm	3900lm	2900lm

Order Guide

A D P - 6 - F S - 1 - - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	6 147x147 mm	F Fixed	T Trim L Trim-less	S Square	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None RC Red Color Film BC Blue Color Film YC Yellow Color Film GC Green Color Film	25 25W 2000lm 700mA 36V	MD 28° FL 32° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
									38 38W 2900lm 1050mA 36V				

*by request


*by request

ADAPT 45 Adjustable Square


IP44 LED

- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation
- CRI>90

Trim



Accessories



Honeycomb Louvre

Wattage	Lumen				Lumen			
	18°	24°	35°	50°	18°	24°	35°	50°
4W	3000K				4000K			
	Source		System		Source		System	
	500lm		350lm		550lm		380lm	

Order Guide


A D P - 1 - A T S - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	145x45mm	A Adjustable	T Trim	S Square	1 Single	WH White	SP Specular	00 None	04 4W 380lm 350mA 12V	SP 18°	927 2700K* CRI>90	ND Non-dim	
						BK Black	MT Matt	HC Honeycomb Louvre		MD 24°	930 3000K CRI>90	AN 1-10V	
							WH White			FL 35°		DA DALI	
							BK Black			WF 50°		PC Phase-Cut	
							GD Gold				940 4000K CRI>90	CA Casambi	
							DS Dark Specular						
							CB Chrome Black						

*by request


*by request

Finish

Black Trim



White Trim




ADAPT 68 Adjustable Square


IP44 LED

- Full range of adjustable downlight, with LED wattage 7.5W, 8.5W, and 11W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim

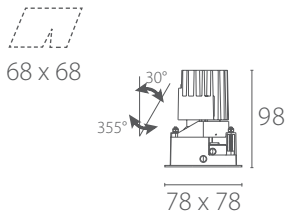


Trimless

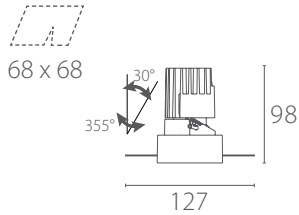

Finish

Black Trim




White Trim



Trimless



Accessories



Honeycomb Louvre

Wattage	Lumen				Lumen			
	10°	24°	40°	55° 3000K	10°	24°	40°	55° 4000K
	Source	System			Source	System		
7.5W	850lm	600lm			900lm	650lm		
8.5W	600m	350lm			650lm	380lm		
11W	1100lm	800lm			1200lm	850lm		


Order Guide

A D P - 3 - A S - 1 - - - - - -														
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear		
ADP	368x68 mm	A Adjustable	T Trim Type L Trim-less	S Square	1 Single	WH White	SP Specular	00 None HC Honeycomb Louvre	07 7.5W 650lm	MD 24° FL 40° WF 55°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi		
						BK Black	MT Matt		250mA 31V					
							WH White							
							BK Black							
							GD Gold							
							DS Dark Specular		08 8.5W 380lm	SP 10°				
							CB Chrome Black		700mA 12V					
									11 11W 850lm	MD 24° FL 40° WF 55°				
									350mA 31V					
*by request														


ADAPT 100 Adjustable Square

- Full range of adjustable downlight, three sizes with LED wattages 13W-18W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim



Trimless



Finish


Black Trim




White Trim



Trimless



Accessories



Honeycomb Louvre

Wattage	Lumen		Lumen	
	20° 40° 50° 3000K		20° 40° 50° 4000K	
	Source	System	Source	System
13W	1300lm	850lm	1400lm	900lm
18W	1700lm	1100lm	1800lm	1200lm

Order Guide

A D P - 4 - A S - 1 - - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	4 96x96 mm	A Adjustable	T Trim L Trimless	S Square	1 Single	WH White	SP Specular	00 None HC Honeycomb Louvre	13 13W 900lm 350mA 36V	MD 20° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
						BK Black	MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black						
									18 18W 1200lm 500mA 36V				

*by request

*by request


ADAPT 125 Adjustable Square

IP44


LED

- Full range of adjustable downlight, three sizes with LED wattages 13W-18W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim



Trimless



Finish


Black Trim




White Trim



Trimless



Accessories



Honeycomb Louvre

Wattage	Lumen		Lumen	
	20° 40° 50° 3000K		20° 40° 50° 4000K	
	Source	System	Source	System
18W	2000lm	1300lm	2100lm	1400lm
25W	2600lm	1700lm	2700lm	1800lm

Order Guide

A D P - 5 - A S - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5 122x122 mm	A Adjustable	T Trim L Trimless	S Square	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None HC Honeycomb Louvre	18 18W 1400lm 500mA 36V 25 25W 1800lm 700mA 36V	MD 20° FL 40° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
*by request													

*by request

ADAPT 150 Adjustable Square

IP44


LED

- Full range of adjustable downlight, three sizes with LED wattages 25W and 38W
- Precision engineered adjustment mechanism, easy to adjust to specific angle
- Thermally engineered heatsink creates highly efficient passive cooling system
- Different colors of secondary reflector are available
- Anti-glare accessory provides maximum glare comfort
- 30° tilt and 355° rotation, CRI>90

Trim



Trimless

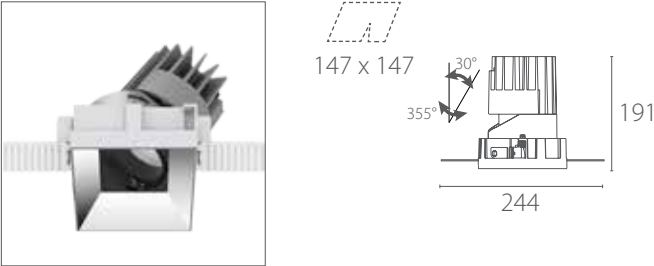

Finish


Black Trim




White Trim



Trimless



Accessories



Honeycomb Louvre

Wattage	Lumen		Lumen	
	20° 35° 50° 3000K		20° 35° 50° 3000K	
	Source	System	Source	System
25W	2700lm	1800lm	2800lm	1900lm
38W	3700lm	2500lm	3900lm	2700lm

Order Guide

A D P - 6 - A S - 1 - - - - - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	6 147x147 mm	A Adjustable	T Trim L Trimless	S Square	1 Single	WH White BK Black	SP Specular MT Matt WH White BK Black GD Gold DS Dark Specular CB Chrome Black	00 None HC Honeycomb Louvre	25 25W 1900lm 700mA 36V 38 38W 2700lm 1050mA 36V	MD 20° FL 35° WF 50°	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi	
*by request													


*by request

ADAPT 100 Wallwasher Square


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim



Trimless



Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
13W	1300lm	480lm	1400lm	520lm
18W	1700lm	650lm	1800lm	700lm

Order Guide

A D P - 4 - W S - 1 - M T - 0 0 - W W - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	496x96mm	W Wall-washer	T Trim L Trim-less	S Square	1 Single	WH White BK Black	MT Matt	00 None	13	13W 520lm 350mA 36V	WW Wall-washer	927	2700K* CRI>90
												ND	Non-dim
												AN	1-10V
												DA	DALI
												PC	Phase-Cut
												CA	Casambi
									18	18W 700lm 500mA 36V		930	3000K CRI>90
												940	4000K CRI>90


*by request

ADAPT 125 Wallwasher Square


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim



Trimless



Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
18W	2000lm	750lm	2100lm	800lm
25W	2600lm	1000lm	2700lm	1100lm

Order Guide

A D P - 5 - W S - 1 - M T - 0 0 - W W - -													
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear	
ADP	5122x122mm	W Wall-washer	T Trim L Trim-less	S Square	1 Single	WH White BK Black	MT Matt	00 None	18	18W 800lm 500mA 36V	WW Wall-washer	927	2700K* CRI>90
												ND	Non-dim
												AN	1-10V
												DA	DALI
												PC	Phase-Cut
												CA	Casambi
									25	25W 1100lm 700mA 36V		930	3000K CRI>90
												940	4000K CRI>90


*by request

ADAPT 150 Wallwasher Square


IP44 LED

- Asymmetric wall washer reflector evenly illuminates walls
- Thermally engineered heatsink creates highly efficient passive cooling system
- CRI>90

Trim



Trimless



Finish



Wattage	Lumen		Lumen	
	3000K		4000K	
	Source	System	Source	System
25W	2700lm	1000lm	2800lm	1100lm
38W	3700lm	1400lm	3900lm	1500lm

Order Guide


A D P - 6 - W S - 1 - M T - 0 0 - W W -												
Product Code	Size	Type	Trim Type	Trim Shape	Number of Lamp	Trim Color	Reflector Color	Accessories	Wattage	Beam Angle	CCT	Control Gear
ADP	6 147x147 mm	W Wall-washer	T Trim L Trim-less	S Square	1 Single	WH White BK Black	MT Matt	00 None	25 25W 1100lm 700mA 36V 38 38W 1500lm 1050mA 36V	WW Wall-washer	927 2700K* CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi

*by request



MINI ME

#Miniature Downlight

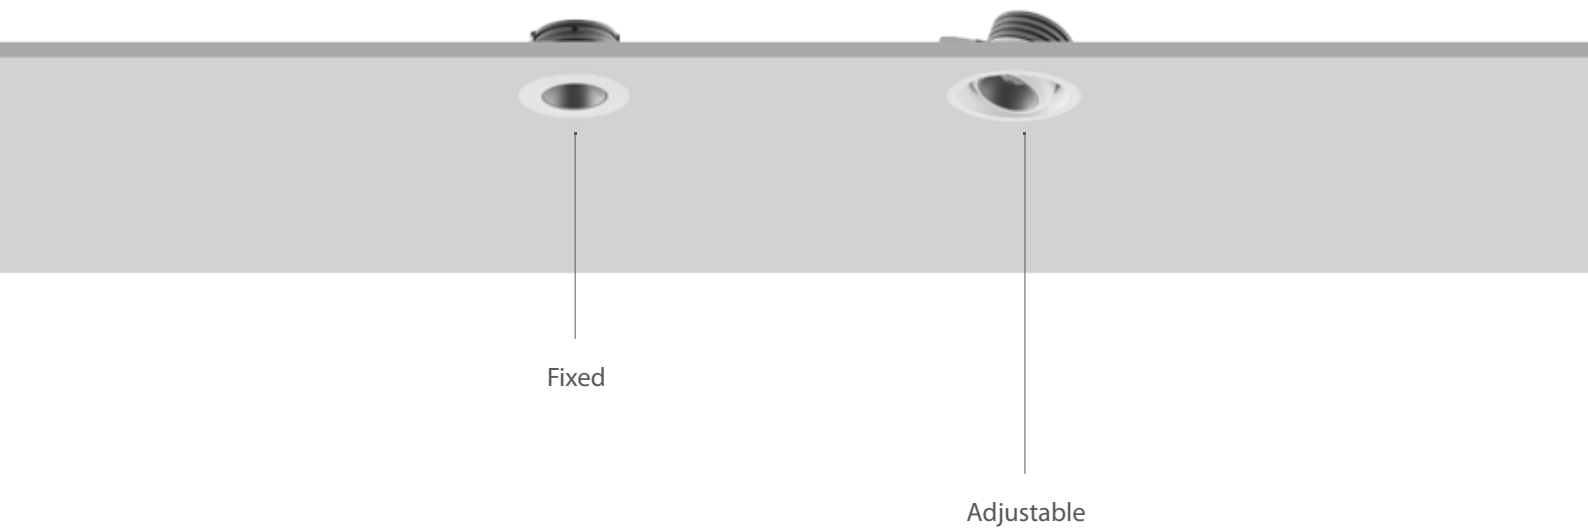

DOWNLIGHT IDEAL FOR FURNITURE

The smallest downlight in 2 version fixed and adjustable with Ø40-50 mm that even fits in your smallest cabinet

Finish

○ White

● Black




MINI ME | Scale 1:1

MINI ME Fixed

IP20 LED

- Recessed miniature downlight
- Trim and body frame die-casted from high quality aluminum
- White or black powder-coated finish for trim

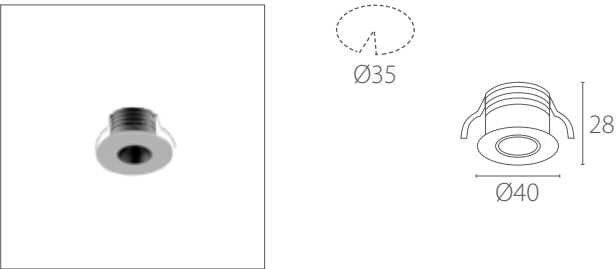

Finish

Round




Order Guide

M M E - 1 - F - R - T - - B L - 0 3 - - - N D											
Product Code	Size	Type	Trim Shape	Trim Type	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear	
MME	1 Ø35mm	F Fixed	R Round	T Trim	WH White BK Black	BL Black	03 3W 270lm (Source: 360lm) 700mA 3V	SS 10° SP 15° MD 24°	927 2700K CRI>80 930 3000K CRI>80	ND Non-dim	

MINI ME Adjustable

IP20 LED

- Recessed miniature downlight
- Trim and body frame die-casted from high quality aluminum
- White or black powder-coated finish for trim
- Tiltable up to 30°

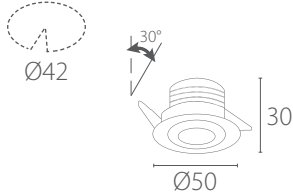

Finish

Round



Order Guide

MME-1-A-R-T- -BL-03- - -ND										
Product Code	Size	Type	Trim Shape	Trim Type	Trim Color	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
MME	2 Ø42mm	A Adjustable	R Round	T Trim	WH White BK Black	BL Black	03 3W 270lm (Source: 360lm) 700mA 3V	SS 10° SP 15° MD 24°	927 2700K CRI>80 930 3000K CRI>80	ND Non-dim

SPECTRA
BY LELCO

NEW GRID | Inspiration






Single
Black Surface | MR16
7.2W | 450 lm | 24° | 3000K



NEW GRID II

#Structured Design

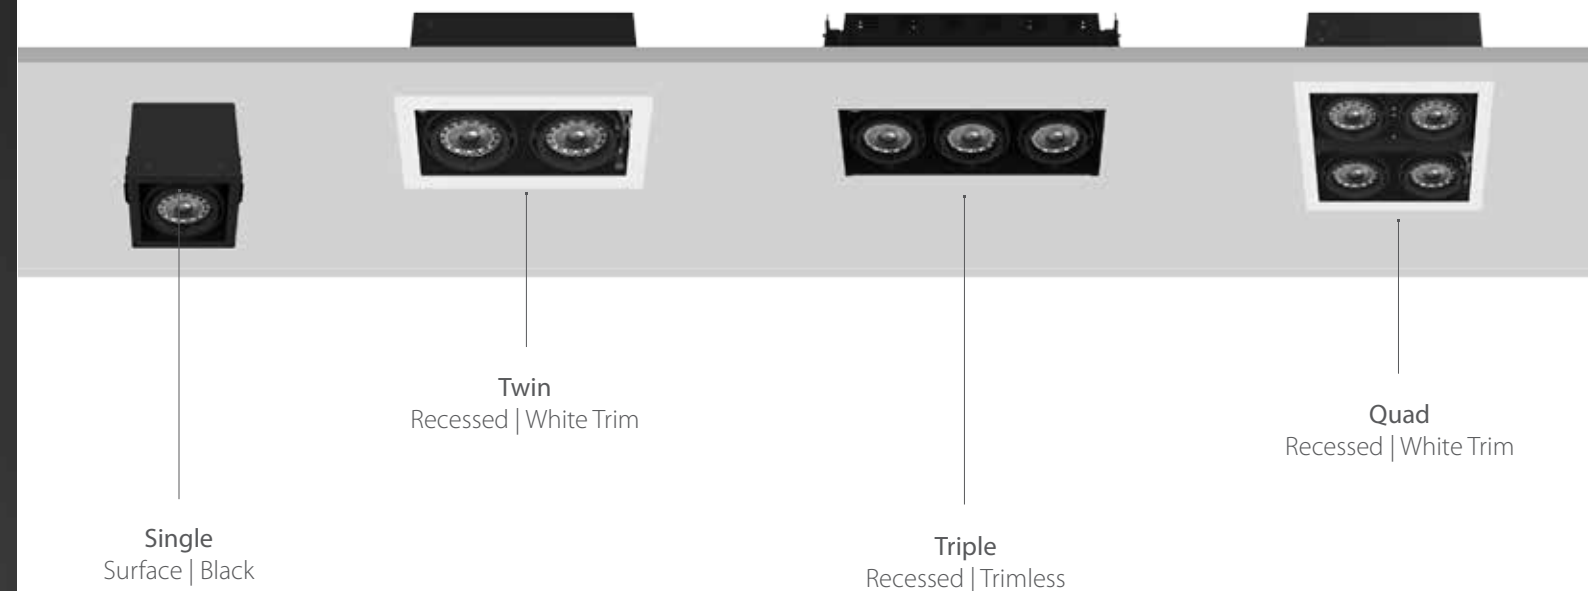

ADJUSTABLE CLAMP MECHANISM

Easily remove and install NEW GRID II without damaging the ceiling.

Finish
☐ White
☒ Black

Trim Type
☒ Trim
☐ Trimless




NEW GRID II MR16 Single


IP20 LED F

- Lamp Type MR16 & GU10
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 50W (Halogen)
- Weight : Single (0.4 kg)


Trim

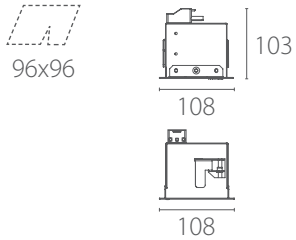


Trimless

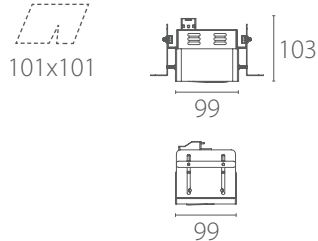


Finish

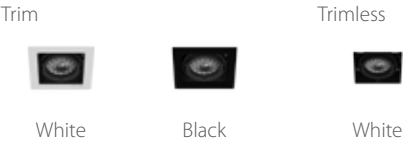

Accessories

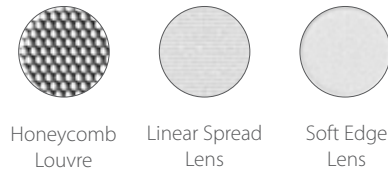

Order Guide

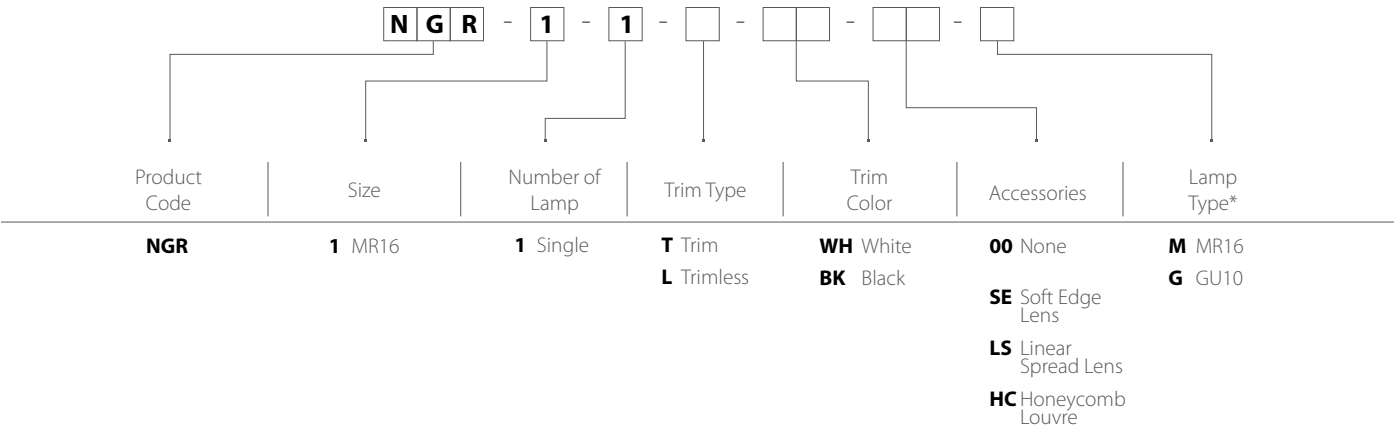


*To be ordered separately

NEW GRID II MR16 Twin


IP20 LED F

- Lamp Type MR16 & GU10
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 50W (Halogen)
- Weight : Twin (0.7 kg)

Trim

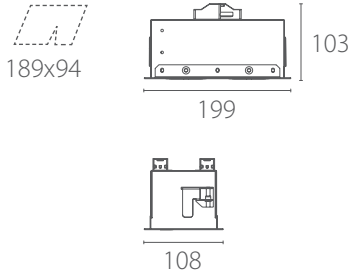


Trimless

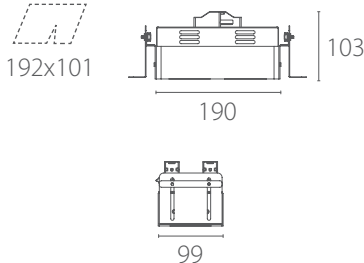


Finish



Accessories

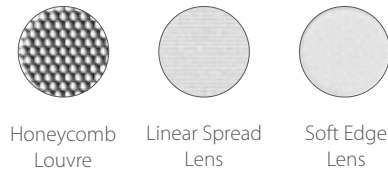

Order Guide

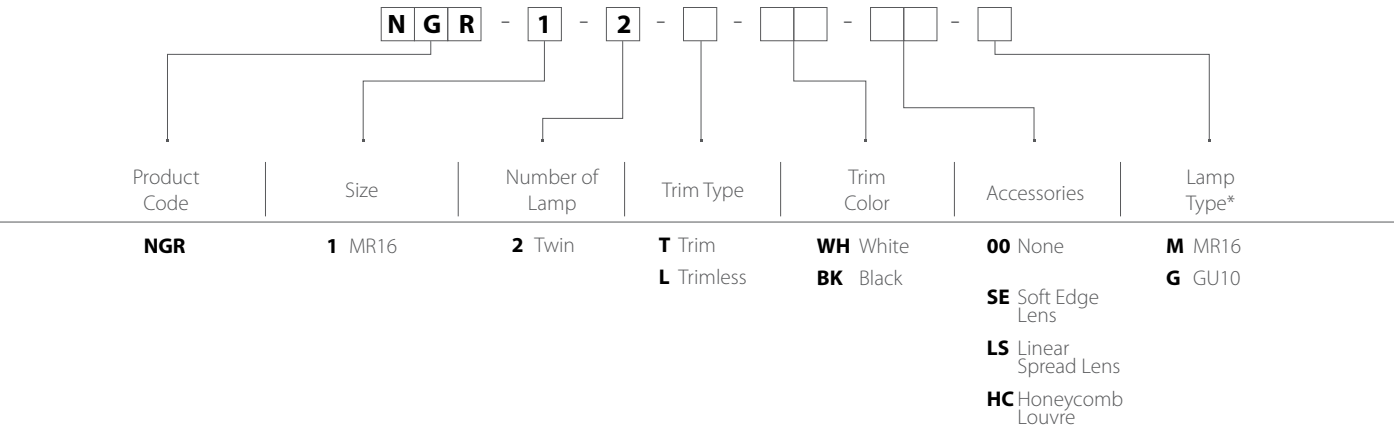


*To be ordered separately

NEW GRID II MR16 Triple


IP20 LED

- Lamp Type MR16 & GU10
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 50W (Halogen)
- Weight : Triple (1 kg)

Trim

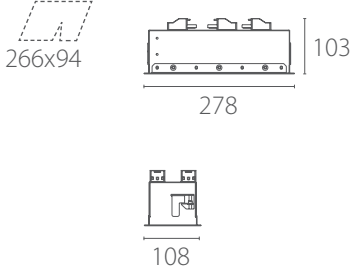


Trimless

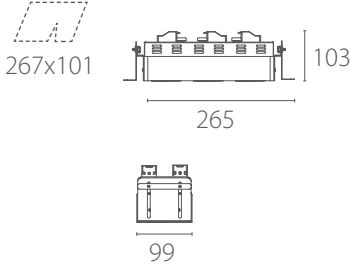

Finish



Accessories

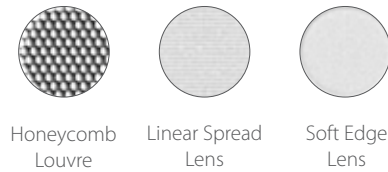

Order Guide

N G R - 1 - 3 - - - -						
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type*
NGR	1 MR16	3 Triple	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10


*To be ordered separately

NEW GRID II MR16 Quad


IP20 LED

- Lamp Type MR16 & GU10
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 50W (Halogen)
- Weight : Quad (1.4 kg)


Trim

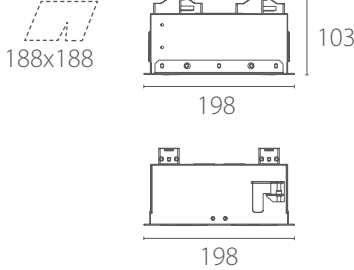


Trimless

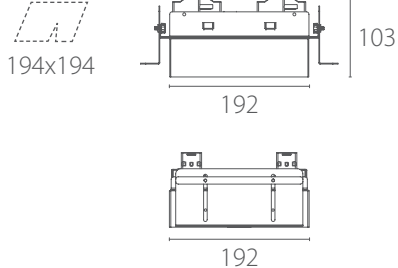

Finish

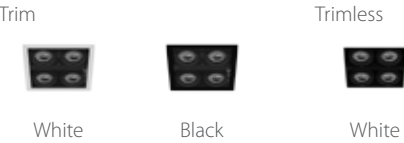

Accessories

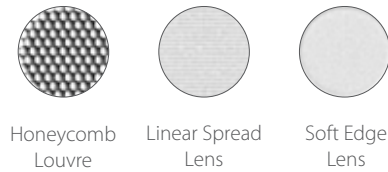

Order Guide

N G R - 1 - 4 - - - -						
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type*
NGR	1 MR16	4 Quad	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10

*To be ordered separately

NEW GRID II AR111 Single


IP20 LED F

- Lamp Type AR111
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Single (0.4 kg)


Trim




Trimless

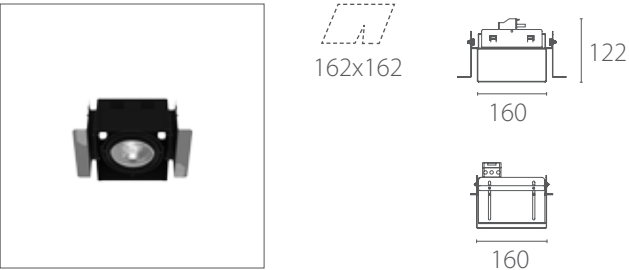


Finish

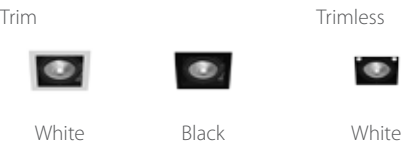

Accessories

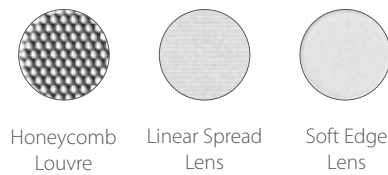

Order Guide

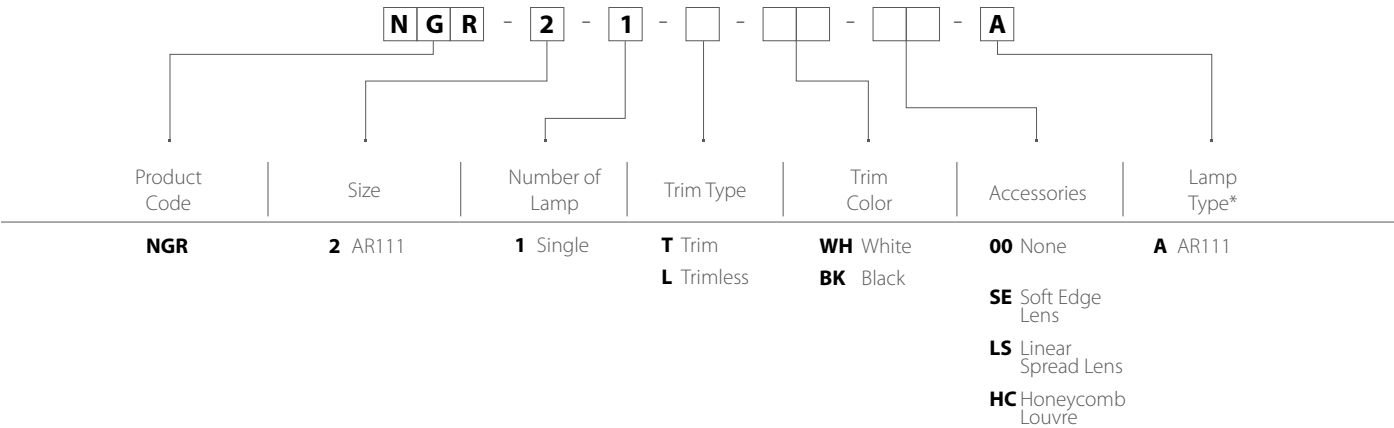


*To be ordered separately

NEW GRID II AR111 Twin


IP20 LED F

- Lamp Type AR111
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Twin (0.7 kg)

Trim

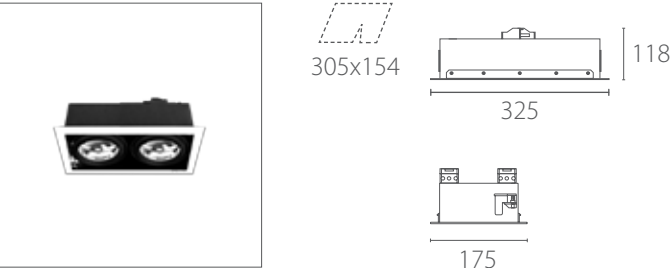


Trimless

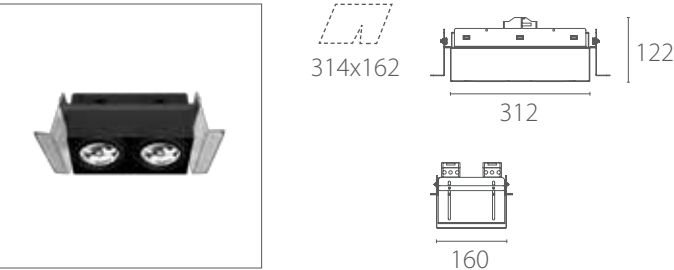


Finish



Accessories

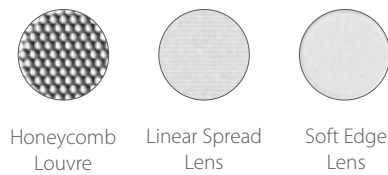

Order Guide

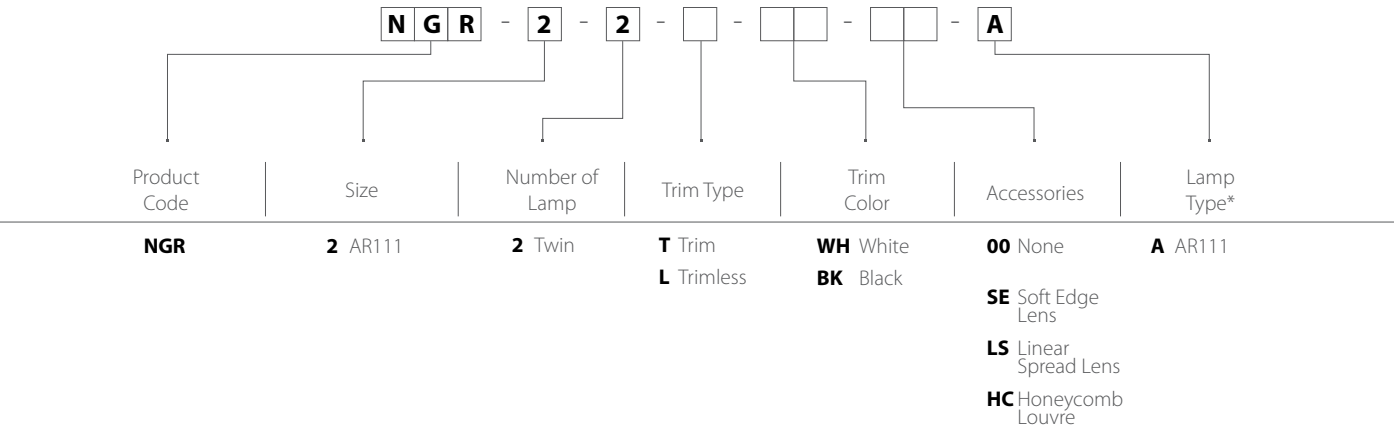


*To be ordered separately

NEW GRID II AR111 Triple


IP20 LED F

- Lamp Type AR111
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Triple (1 kg)

Trim

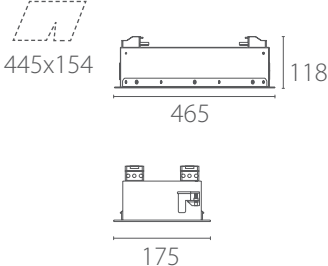


Trimless

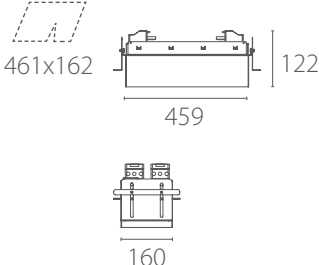


Finish



Accessories

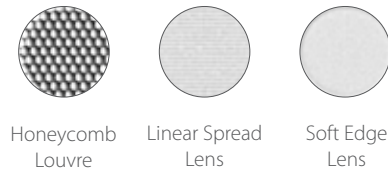

Order Guide

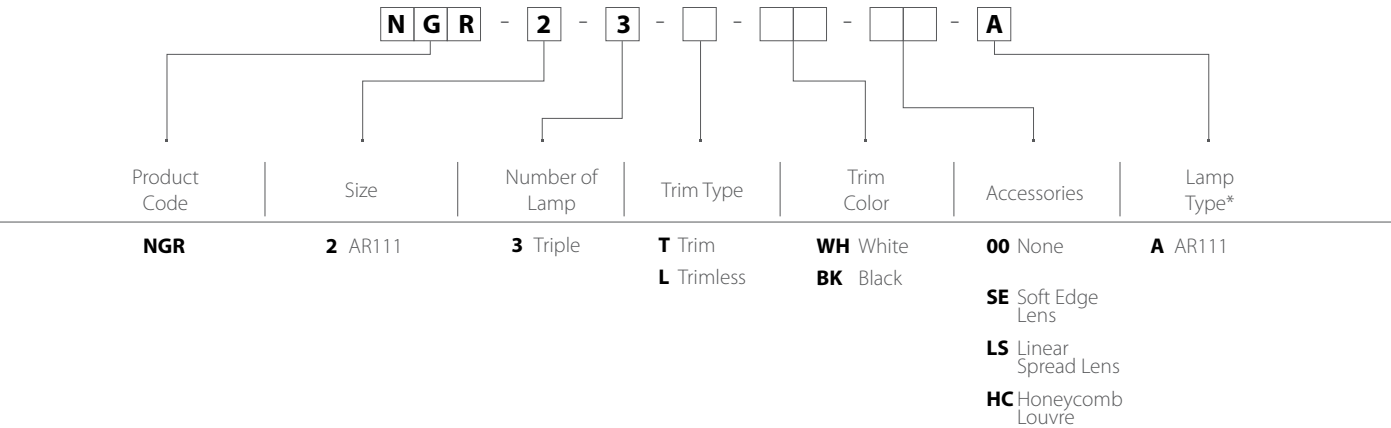


*To be ordered separately

NEW GRID II AR111 Quad


IP20 LED F

- Lamp Type AR111
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Quad (1.4 kg)

Trim




Trimless




Finish



Accessories

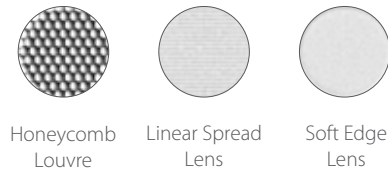

Order Guide

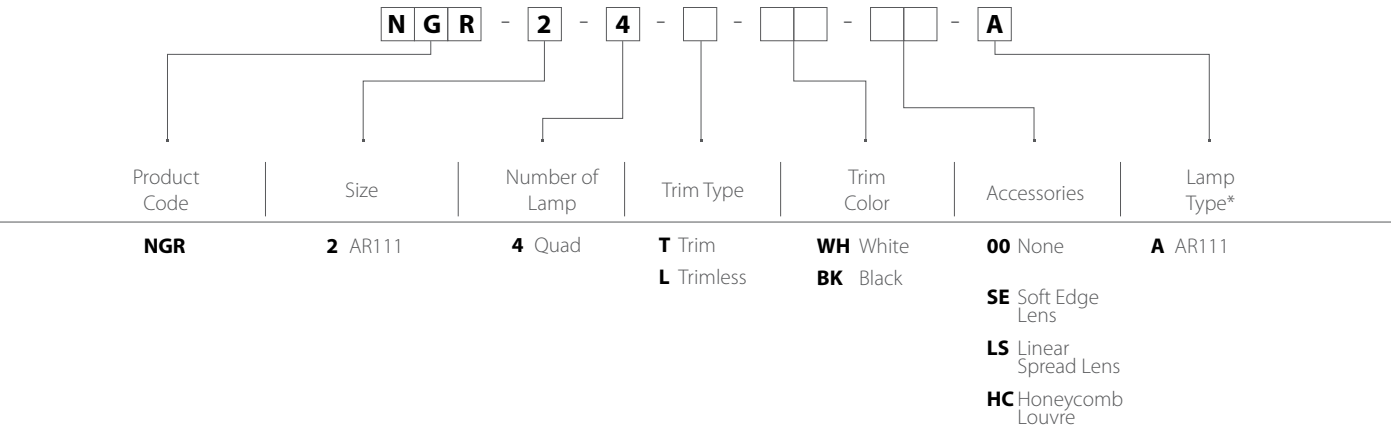


*To be ordered separately

NEW GRID II LED Module PC50 Single


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Single (0.4 kg)


Trim

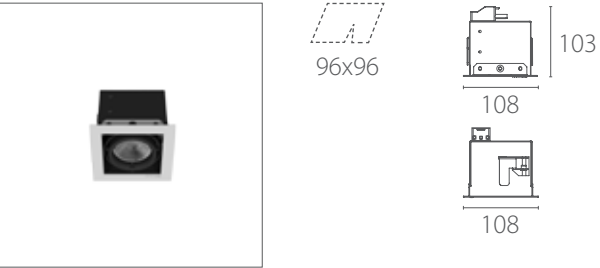


Trimless

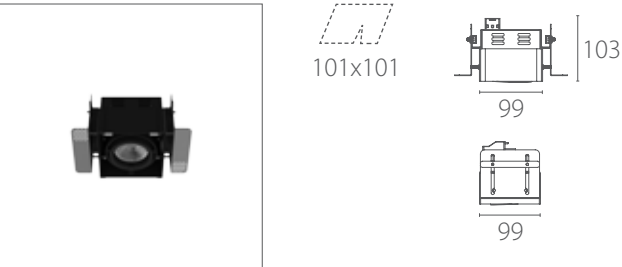


LED Module Type

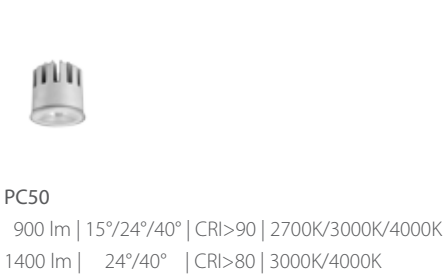

Accessories

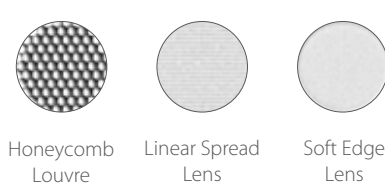

Finish

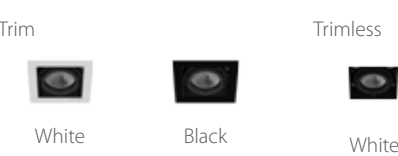

Order Guide

NGR 1 1										
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	1 MR16	1 Single	T Trim L Trimless	WH White BK Black	00 None	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15°	927 2700K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
					SE Soft Edge Lens			MD 24°	930 3000K CRI>90	
					LS Linear Spread Lens			FL 40°	940 4000K CRI>90	
					HC Honeycomb Louvre		13 12.9W 1400lm 350mA 37V	MD 24°	830 3000K CRI>80	
								FL 40°	840 4000K CRI>80	

NEW GRID II LED Module P111 Single


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Single (0.4 kg)

Trim




Trimless

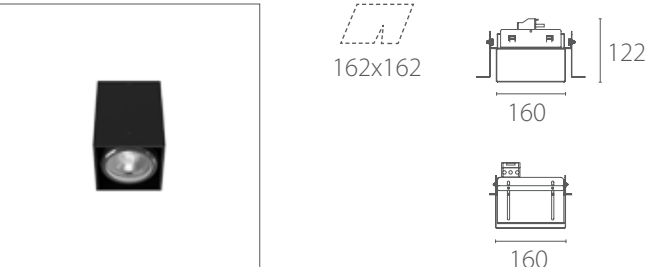


LED Module Type



Accessories

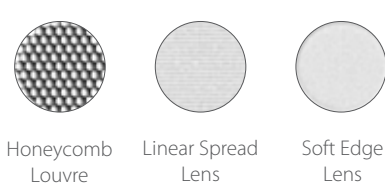

Finish

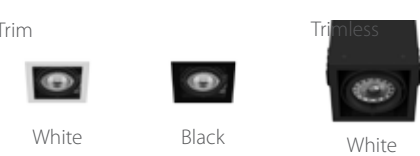

Order Guide


N G R - 2 - 1 - - - - - - - - - - -										
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	2 AR111	1 Single	T Trim L Trimless	WH White BK Black	00 None	P111 G1	18 18W 1800lm 500mA 36V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
					SE Soft Edge Lens					
					LS Linear Spread Lens					
					HC Honeycomb Louvre		26 25.9W 2800lm 700mA 37V	SP 15° MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	
							37 37.6W 4300lm 1050mA 36V	MD 24° FL 40° WF 60°		

NEW GRID II LED Module PC50 Twin


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Twin (0.7 kg)

Trim

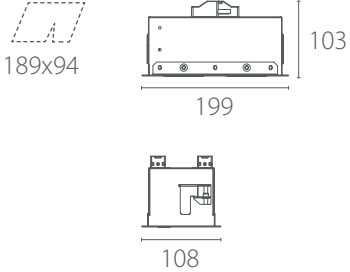

Trimless

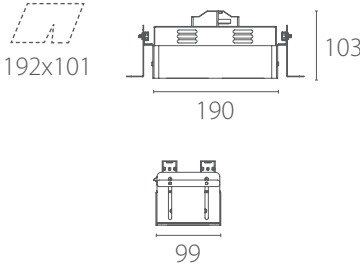

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	1 MR16	2 Twin	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
							13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	

NEW GRID II LED Module P111 Twin


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Twin (0.7 kg)

Trim

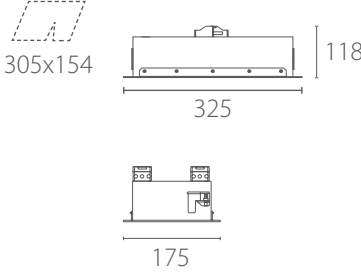

Trimless

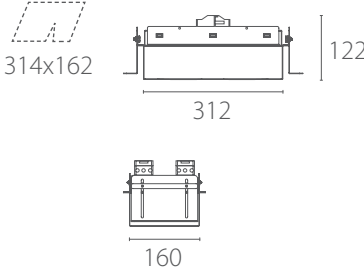

LED Module Type



P111
1800 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
2800 lm | 15°/24°/40° | CRI>80 | 3000K/4000K
4300 lm | 24°/40°/60° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	2 AR111	2 Twin	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	P111 G1	18 18W 1800lm 500mA 36V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
							26 25.9W 2800lm 700mA 37V	SP 15° MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	
							37 37.6W 4300lm 1050mA 36V	MD 24° FL 40° WF 60°		

NEW GRID II LED Module PC50 Triple


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Triple (1 kg)

Trim

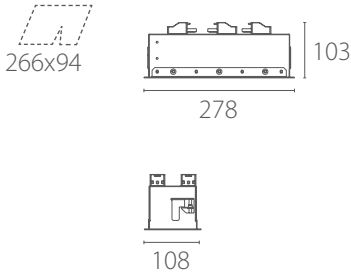

Trimless

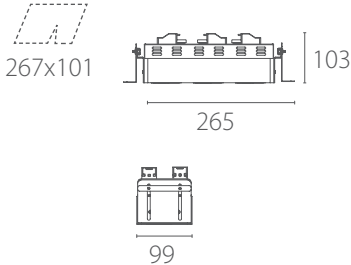

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	1 MR16	3 Triple	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V 13 12.9W 1400lm 350mA 37V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90 830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi

NEW GRID II LED Module P111 Triple


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Triple (1 kg)

Trim



Trimless



LED Module Type



P111
1800 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
2800 lm | 15°/24°/40° | CRI>80 | 3000K/4000K
4300 lm | 24°/40°/60° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	2 AR111	3 Triple	T Trim L Trimless	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	P111 G1	18 18W 1800lm 500mA 36V 26 25.9W 2800lm 700mA 37V 37 37.6W 4300lm 1050mA 36V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90 830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi

NEW GRID II LED Module PC50 Quad


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Quad (1.4 kg)

Trim

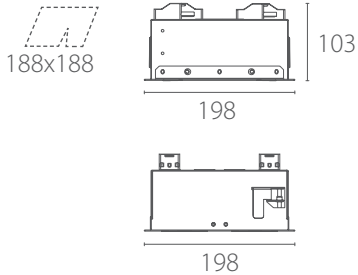

Trimless

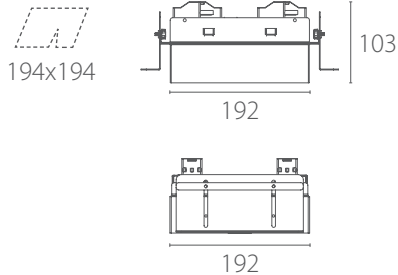

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


NGR 1 4										
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	1 MR16	4 Quad	T Trim L Trimless	WH White BK Black	00 None	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15°	927 2700K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
					SE Soft Edge Lens			MD 24°	930 3000K CRI>90	
					LS Linear Spread Lens			FL 40°	940 4000K CRI>90	
					HC Honeycomb Louvre		13 12.9W 1400lm 350mA 37V	MD 24°	830 3000K CRI>80	
								FL 40°	840 4000K CRI>80	

NEW GRID II LED Module P111 Quad


IP20 LED

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Max. 70W (Halogen)
- Weight : Quad (1.4 kg)

Trim



Trimless



LED Module Type



P111
1800 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
2800 lm | 15°/24°/40° | CRI>80 | 3000K/4000K
4300 lm | 24°/40°/60° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide


NGR 2 4										
Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGR	2 AR111	4 Quad	T Trim L Trimless	WH White BK Black	00 None	P111 G1	18 18W 1800lm 500mA 36V	SP 15°	927 2700K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
					SE Soft Edge Lens			MD 24°	930 3000K CRI>90	
					LS Linear Spread Lens			FL 40°	940 4000K CRI>90	
					HC Honeycomb Louvre		26 25.9W 2800lm 700mA 37V	MD 24°	830 3000K CRI>80	
								FL 40°	840 4000K CRI>80	
							37 37.6W 4300lm 1050mA 36V	MD 24°		
								FL 40°		
								WF 60°		

NEW GRID II Surface MR16/GU10


IP20 LED F

- Lamp Type MR16 & GU10
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector


Single

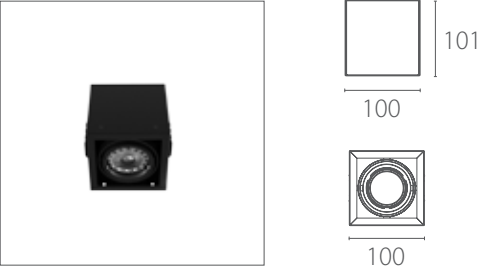


Twin

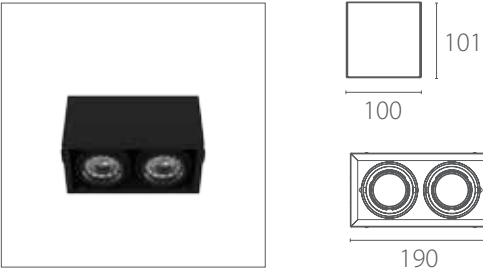

Accessories

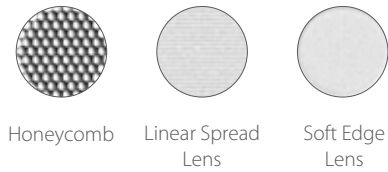

Order Guide

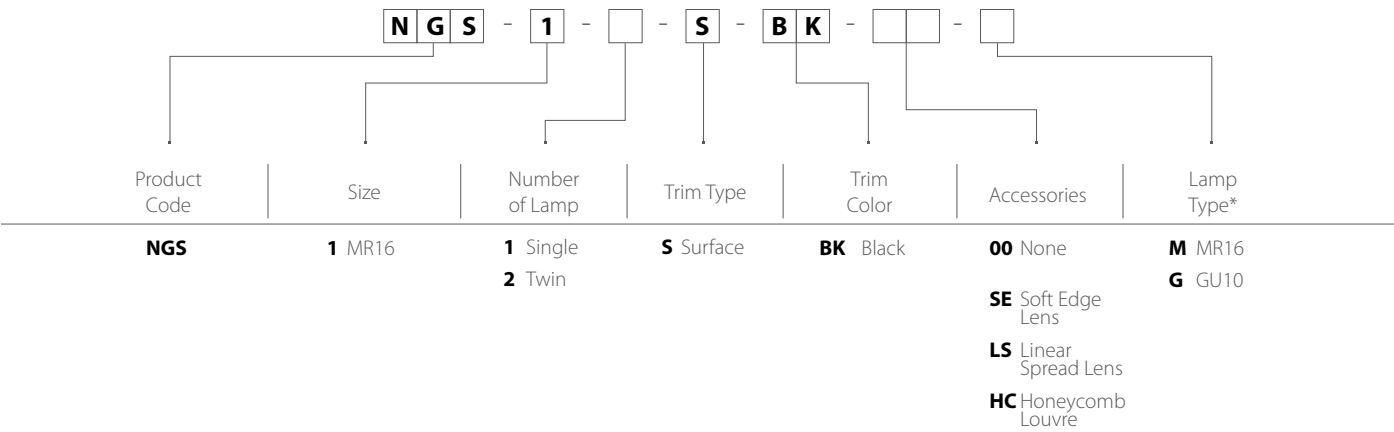


*To be ordered separately

NEW GRID II Surface AR111


IP20 LED F

- Lamp Type AR111
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector


Single

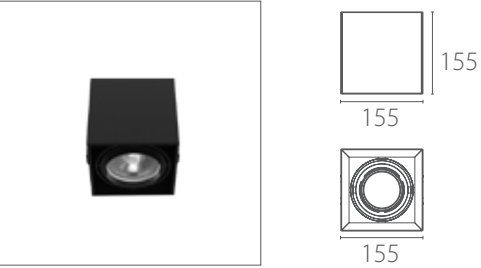


Twin

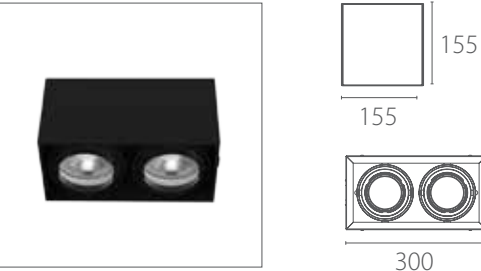

Accessories

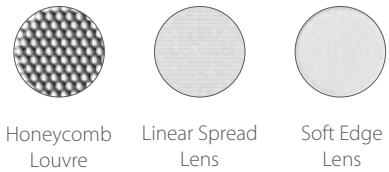

Order Guide

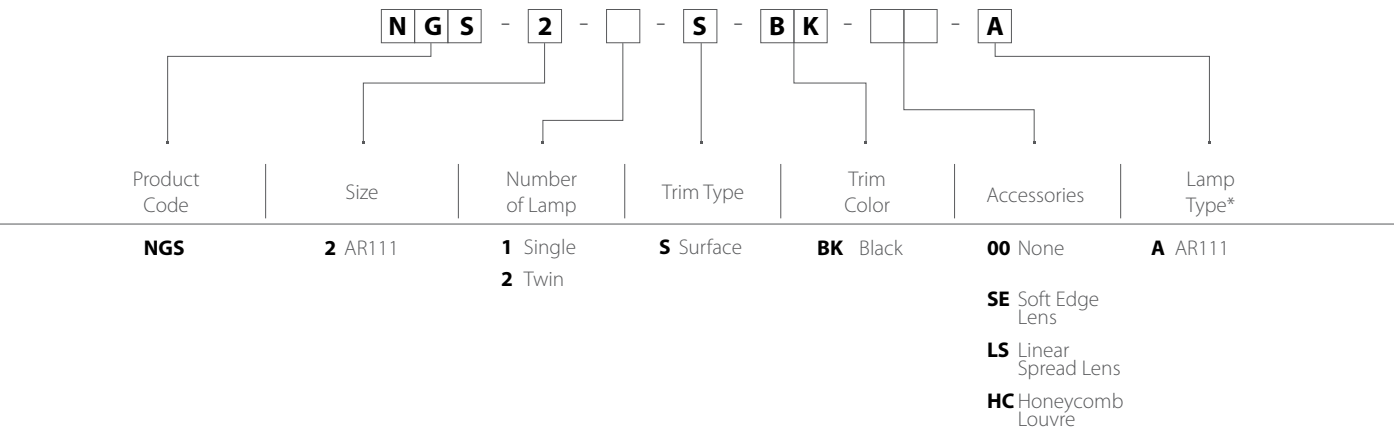


*To be ordered separately

NEW GRID II Surface LED Module PC50


IP20 LED F

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector


Single

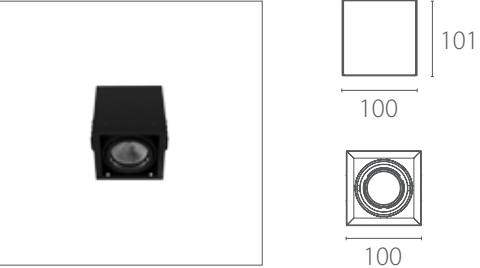


Twin

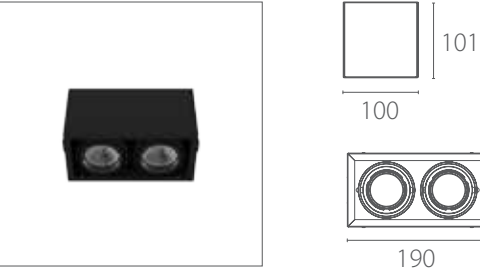

LED Module Type

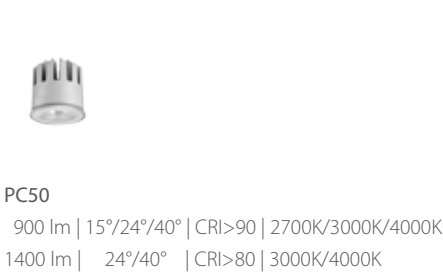

Accessories

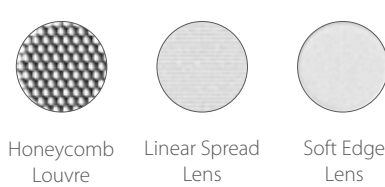

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGS	1 MR16	1 Single 2 Twin	S Surface	BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
							13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	

NEW GRID II Surface LED Module P111


IP20 LED F

- Lamp Type LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector

Single

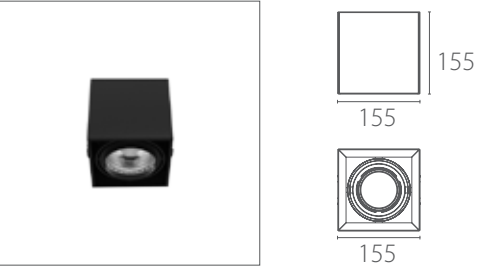


Twin

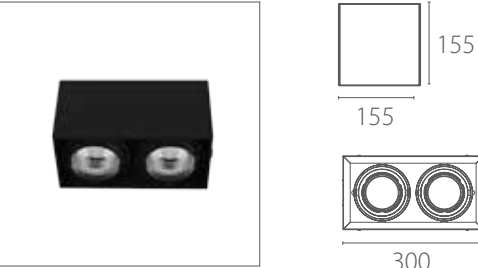

LED Module Type



Accessories

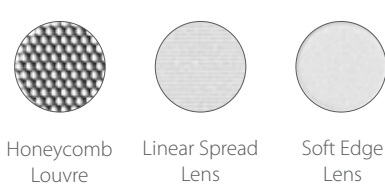

Order Guide


Product Code	Size	Number of Lamp	Trim Type	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
NGS	2 AR111	1 Single 2 Twin	S Surface	BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	P111 G1	18 18W 1800lm 500mA 36V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
							26 25.9W 2800lm 700mA 37V	SP 15° MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	
							37 37.6W 4300lm 1050mA 36V	MD 24° FL 40° WF 60°		

APTO II

#Combining Comfort and Performance



Twin
White Trim | MR16
7.2W | 450 lm | 24° | 3000K



Single



Twin

Finish

- ☐ White
- ☒ Black




APTO II MR16/GU10


IP20 LED F

- Lamp Type MR16, GU10, & LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Weight : Single (0.4 kg), Twin (0.8 kg)

Single



Twin



Finish

Round



White



Black

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide

A P R - 1 - - -

Product Code	Number of Lamp	Trim Color	Accessories	Lamp Type*
APR	1 Single 2 Twin	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	M MR16 G GU10


*To be ordered separately

APTO II LED Module PC50


IP20 LED F

- Lamp Type MR16, GU10, & LED Module
- Easy to install with Adjusting Clamp
- Easy wiring connection with socket connector
- Weight : Single (0.4 kg), Twin (0.8 kg)

Single



Twin



Finish

Round



White



Black

LED Module Type



PC50
900 lm | 15°/24°/40° | CRI>90 | 2700K/3000K/4000K
1400 lm | 24°/40° | CRI>80 | 3000K/4000K

Accessories



Honeycomb Louvre



Linear Spread Lens



Soft Edge Lens

Order Guide

N G S - - B K - - - - - - - - - -

Product Code	Number of Lamp	Trim Color	Accessories	Lamp Type	Wattage	Beam Angle	CCT	Control Gear
APR	1 Single 2 Twin	WH White BK Black	00 None SE Soft Edge Lens LS Linear Spread Lens HC Honeycomb Louvre	PC50 G1	12 12.3W 900lm 350mA 35V	SP 15° MD 24° FL 40°	927 2700K CRI>90 930 3000K CRI>90 940 4000K CRI>90	ND Non-dim AN 1-10V DA DALI PC Phase-Cut CA Casambi
					13 12.9W 1400lm 350mA 37V	MD 24° FL 40°	830 3000K CRI>80 840 4000K CRI>80	

*To be ordered separately

Accent Light
Square | Recessed | Black
15W | 1100lm | 4000K



General Light
Opal | Recessed
12.3W | 1520lm | 4000K



General Light
Opal | Pendant
24.5W | 3165lm | 4000K





SpotLight
Recessed
15W | 1200lm | 4000K | 15°



VARIUS

#Infinite Combination

MOUNT IT YOUR WAY
You can choose between surface mounted, recessed or pendant

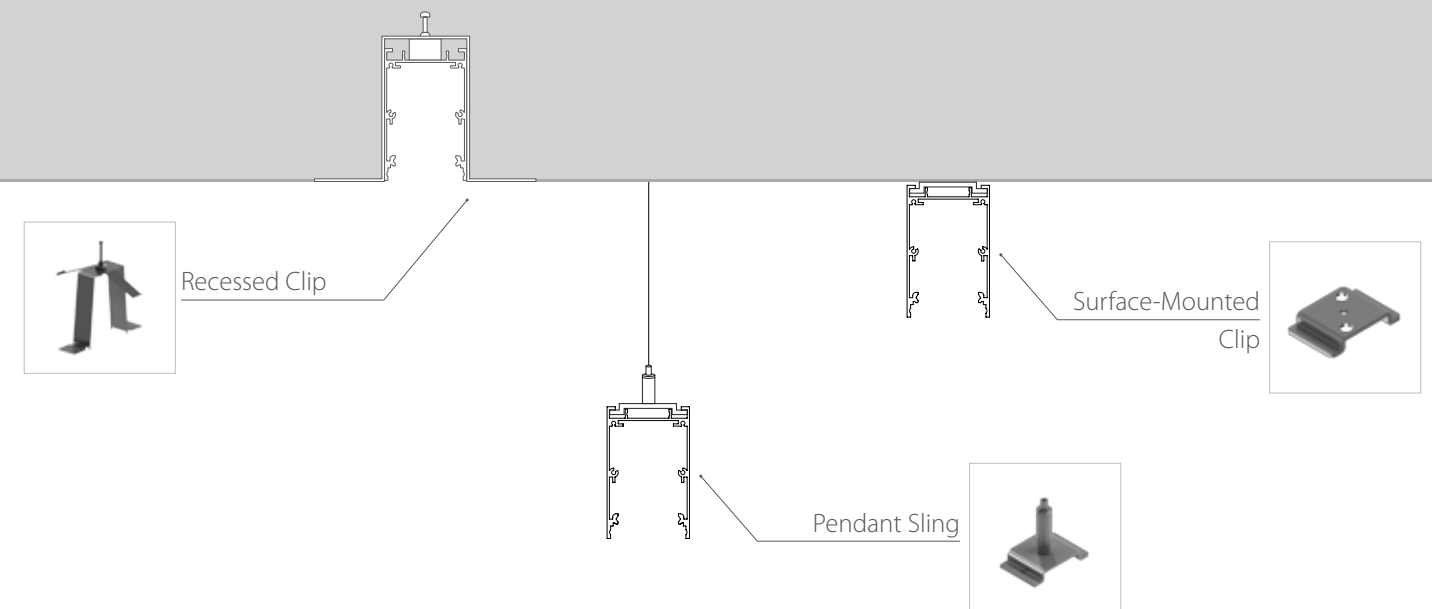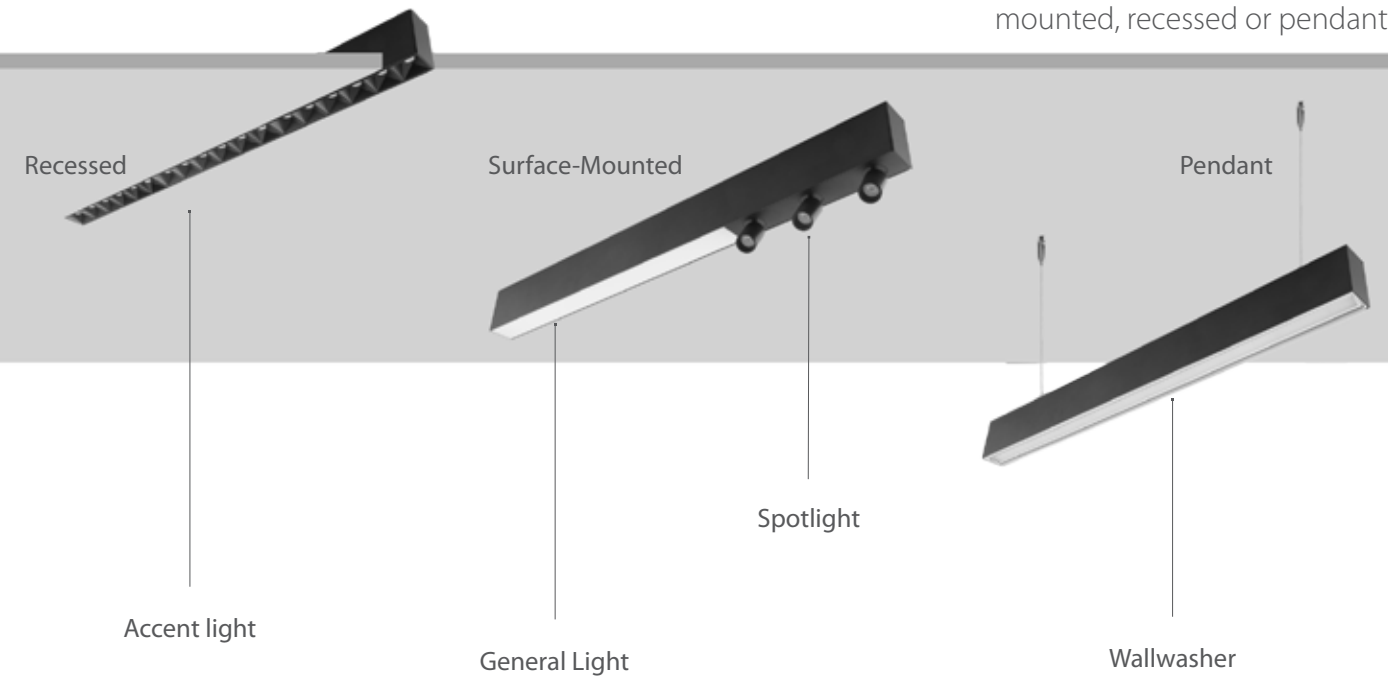




General Light
Opal | Recessed
13W | 1400lm | 4000K



Accent Light
Square | Recessed | Black
15W | 1100lm | 4000K

SEAMLESS INSTALLATION

Seamless panel concept with designated track lengths, seamless application can be done easier than ever.

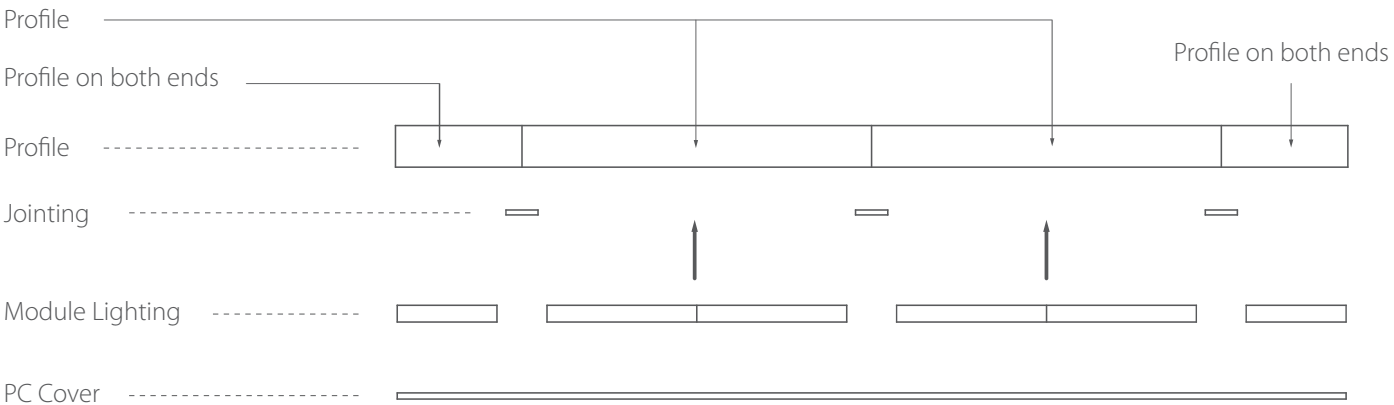

REFLECTOR COLOR OPTIONS


Available in four reflector color options, black, white, matt, and gold for accent type.


Insert

- ☐ Matt
- ☐ White
- ☐ Black
- ☐ Gold

VARIUS

Breakdown Installation

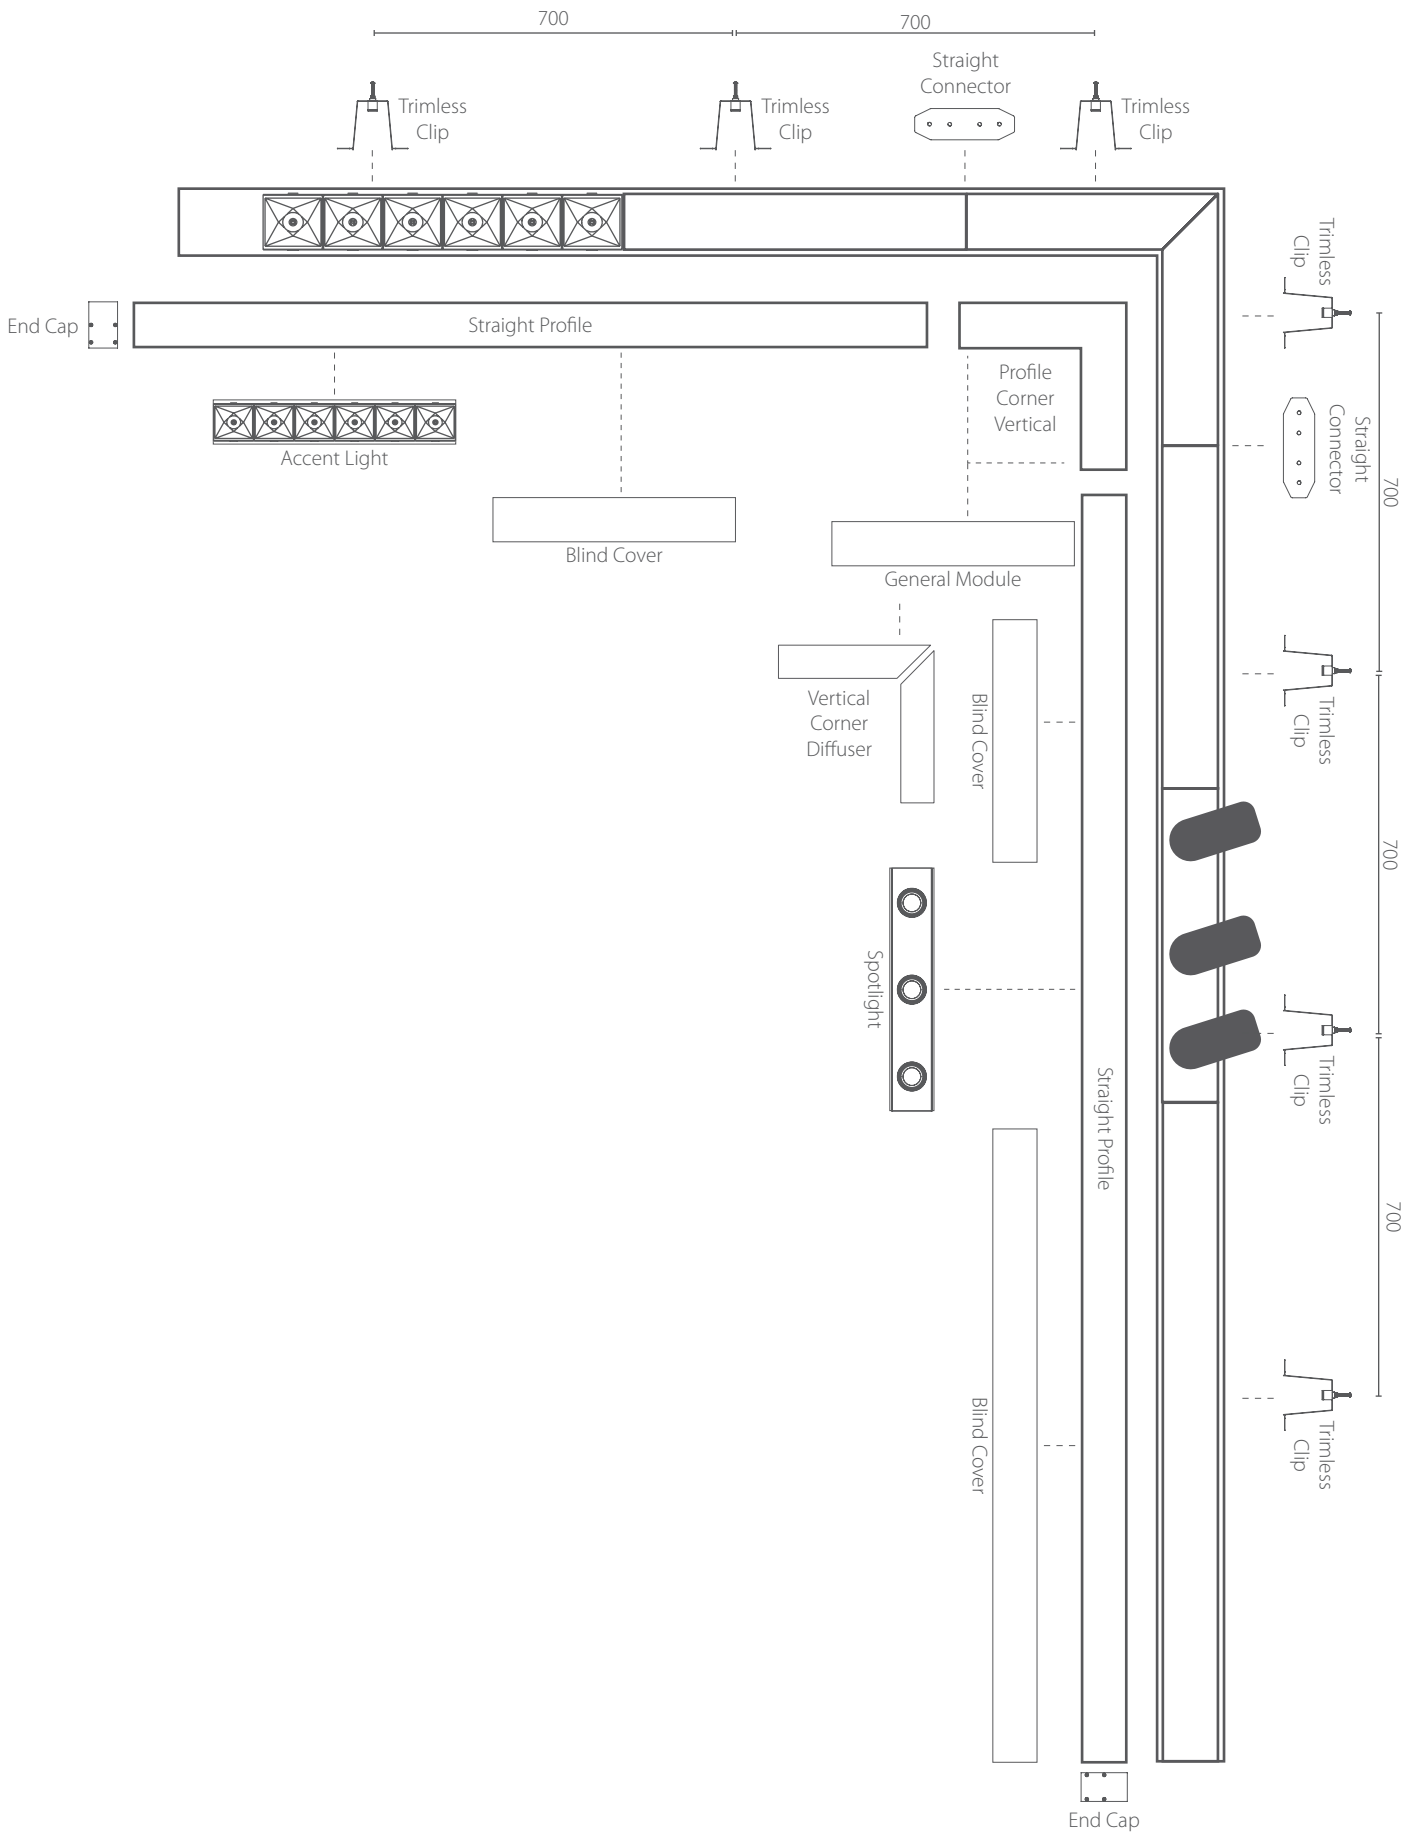


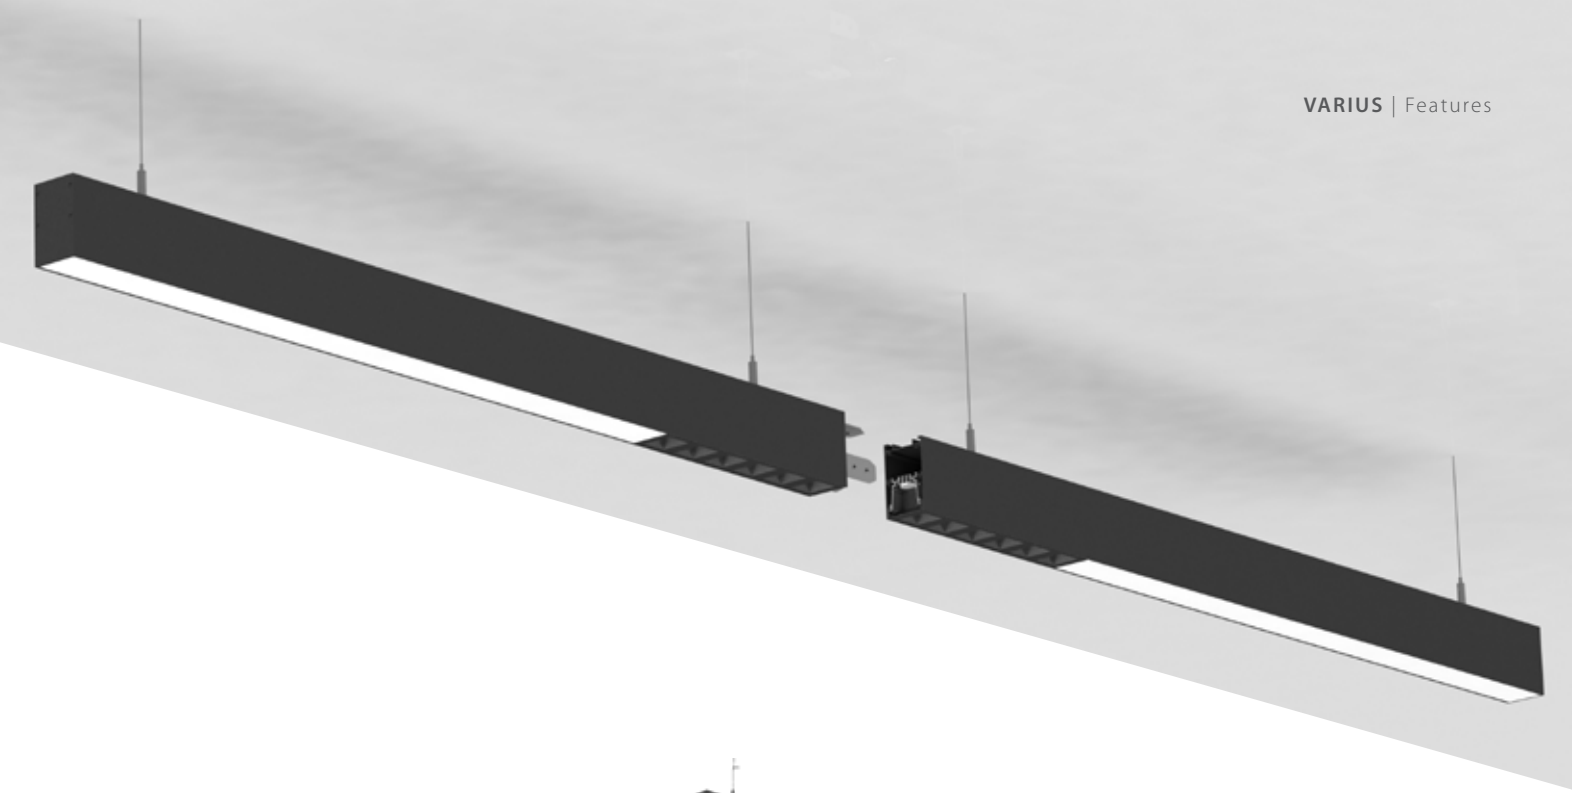

CREATE YOUR COMBO
Varius system allows you to create infinite combination to match your application

CONNECTOR

Standard connector is designed to fit for continuous-row system. Its lengthen the profile and available for combining.

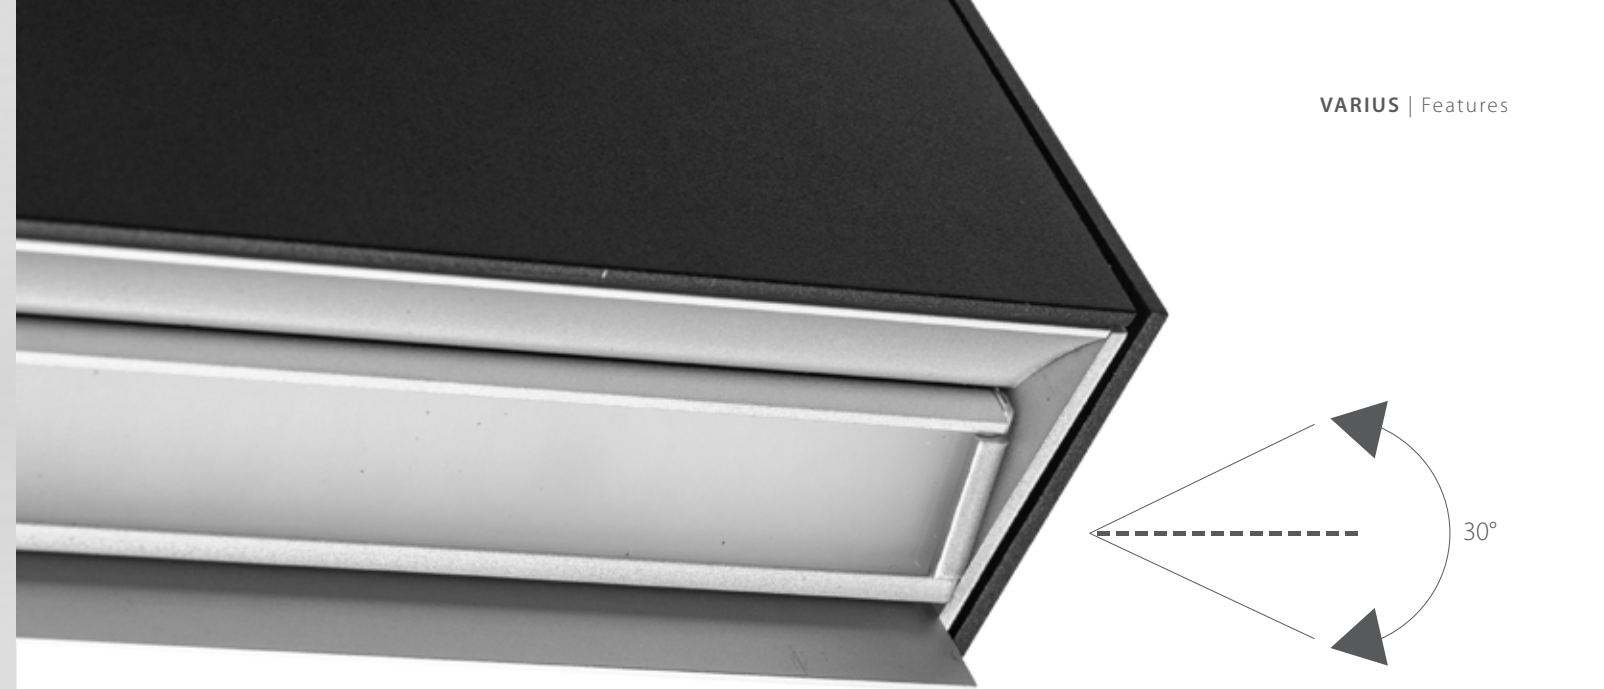



WALL WASHER MODULE
can be tilted to the desired lighting position up to 30°

VARIUS | General Light + Wall Washer module



VARIUS Profile

- Profile system made from extruded aluminum with 50mm width and 80 mm height
- Available in three color options: White, Black, and Raw Anodized

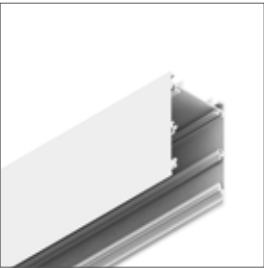

Finish



White Black Raw Anodized

Order Guide

V

R

S

 -

2

 -

P

R

 - -

Product Code

Size

Type

Profile Color

Length

VRS	2 50x80mm	PR Profile	WH White	050 500 mm
			BK Black	100 1000 mm
			RA Raw Anodized	150 1500 mm
				200 2000 mm
				250 2500 mm
				300 3000 mm

VARIUS End Cap

- End cap made from high quality aluminum to fit Varius profile
- Available in three color options: White, Black, and Raw Anodized



Finish



White Black Raw Anodized

Order Guide

V

R

S

 -

2

 -

A

C

 -

E

C

 -

Product Code

Size

Type


Accessories Type

Profile Color


VRS	2 50x80mm	AC Accessories	EC End Cap	WH White
				BK Black
				RA Raw Anodized

VARIUS Horizontal Corner

- Horizontal Corner made from Extruded Aluminum Profile
- Available in three color options: White, Black, and Raw Anodized

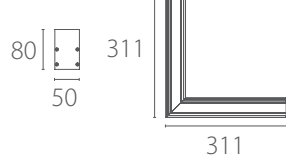

Finish



White Black Raw Anodized

Order Guide

V

R

S

 -

2

 -

H

C

 -

Product Code

Size



Type

Profile Color

VRS	2 50x80mm	HC Horizontal Corner	WH White
			BK Black
			RA Raw Anodized

VARIUS Vertical Corner

- Vertical Corner made from Extruded Aluminum Profile
- Available in three color options: White, Black, and Raw Anodized

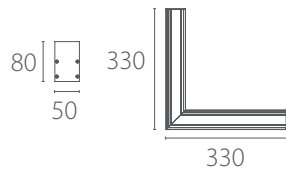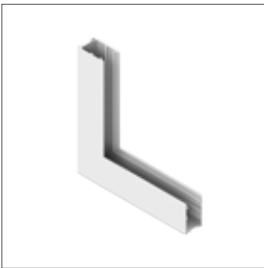

Finish



White Black Raw Anodized

Order Guide

V

R

S

 -

2

 -

V

C

 -

Product Code

Size


Type

Profile Color


VRS	2 50x80mm	VC Vertical Corner	WH White
			BK Black
			RA Raw Anodized

VARIUS Connector

- Made from high quality galvanized steel
- Use to connect from one Varius Straight Profile to another
- Each set contains 2 pieces of side connector and 1 piece of top connector


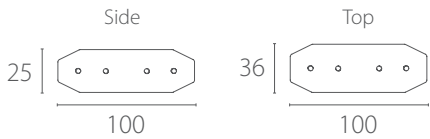


Order Guide

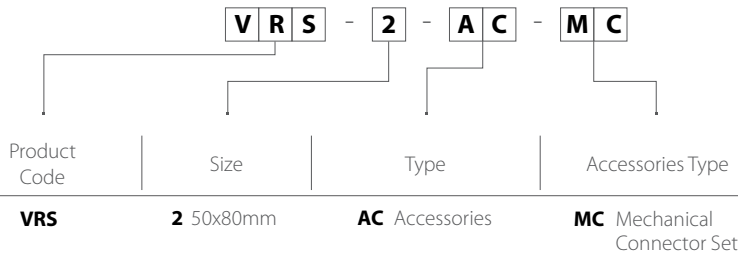


VARIUS Pendant Sling

- Made from high quality galvanized steel and stainless steel cable
- Include 1.5 m sling
- Pendant sling can handle max 50Kg
- Follow installation instruction to install pendant sling

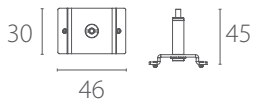
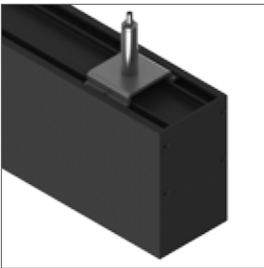


Order Guide

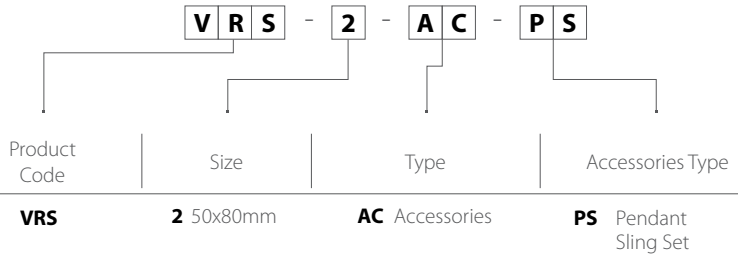


VARIUS Trimless Clip

- Made from high quality galvanized steel
- Clip for trimless installation
- Follow installation instruction to install trimless clip

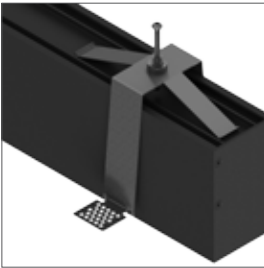


Order Guide

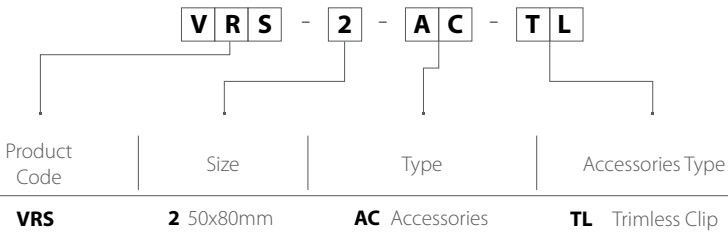


VARIUS Surface Mounted Clip

- Made from high quality galvanized steel
- Clip for surface-mounted installation
- Follow installation instruction to install surface mounted clip




Order Guide

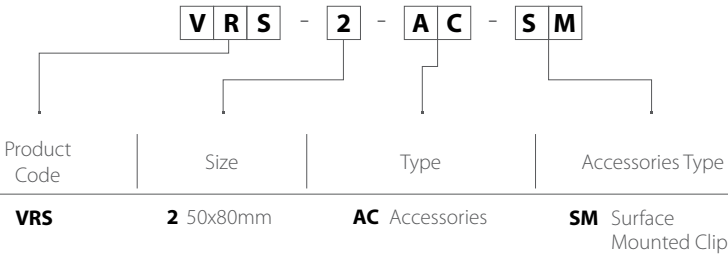

VARIUS Diffuser

- Made from high quality polycarbonate
- Opal diffuser optic provides maximum light diffusion

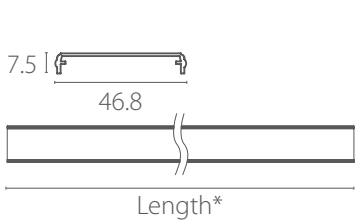

Finish





Opal

Order Guide

Product Code	Size	Type	Color	Length
VRS	2 50x80mm	DF Diffuser	OP Opal	050 500 mm 100 1000 mm 150 1500 mm 200 2000 mm 250 2500 mm 300 3000 mm

VARIUS Blind Cover


- Profile system made of extruded aluminum
- Available in three color options: White, Black, and Raw Anodized

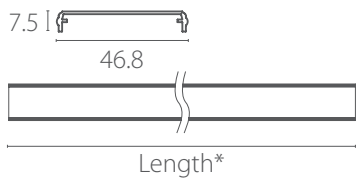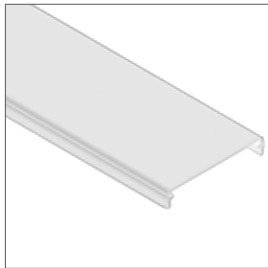


Finish



White



Black



Raw Anodized


Order Guide

Product Code	Size	Type	Color	Length
VRS	2 50x80mm	BL Blind Cover	WH White BK Black RA Raw Anodized	050 500 mm 100 1000 mm 150 1500 mm 200 2000 mm 250 2500 mm 300 3000 mm

VARIUS General Module

IP40 LED

- Thermally engineered heatsink for highly efficient passive cooling system
- LED module with high efficacy for general lighting illumination
- Available in 3000K, 4000K, and 6500K color temperature

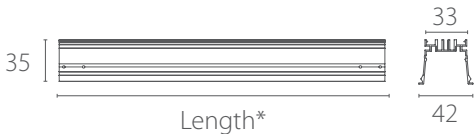


Order Guide

Product Code	Size	Type	Lamp Type	Length*	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50x80mm	GL General Lighting Module	OSBL G3	028 280mm	06 6.1W 790lm 250mA 24.5V	GL 100°	830 3000K CRI>80 840 4000K CRI>80 865 6500K CRI>80	ND Non-dim AN 1-10V DA DALI
				056 560mm	13 12.3W 1520lm 250mA 49.1V			
				112 1120mm	24 24.5W 3165lm 250mA 98.2V			

VARIUS Accent Module

IP40 LED F

- Perfect anti-glare due to black high-gloss grid
- Continuous light line linked by linear connector
- Available in combination module type

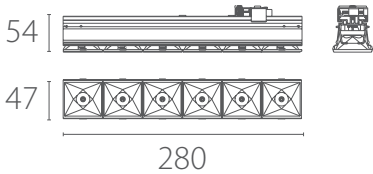

Finish



Matt White Black Gold


Order Guide

V R S - 2 - A L - - 1 5 - F L - - -							
Product Code	Size	Type	Reflector Color	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50X80mm	AL Accent Light Module	MT Matt WH White BK Black GD Gold	15 15W 1100lm	FL 40°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI

VARIUS Wallwasher Module

IP40 LED F

- Continuous light line linked by linear connector
- Available in combination module type

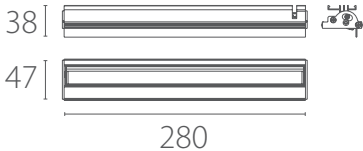


Order Guide

V R S - 2 - W W - N A - 0 8 - W W - - -							
Product Code	Size	Type	Color	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50X80mm	WW Wallwasher Light Module	NA Not Aplicable	08 8W 600lm	WW Wall-washer	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI

VARIUS Spotlight Module

IP40 LED F

- Continuous light line linked by linear connector
- Available in combination module type

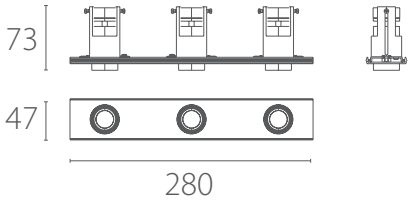

VARIUS General Lighting


IP40 LED F

- Profile system made of extruded aluminum with 50mm width
- General lighting module included for basic illumination
- Various types of installation available (pendant/surface-mounted/recessed)

Trim



Trim Surface




Trimless Recessed



Pendant



Pendant Down



Finish

Profile



White



Black



Raw Anodized

Order Guide

V R S - 2 - S P - B K - 1 5 - - - -							
Product Code	Size	Type	Color	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50X80mm	SP Spotlight Module	BK Black	15 15W 1200lm	SP 15° MD 30° WF 55°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI

Order Guide


V R S - 2 - G L - - - - - - - - - - -									
Product Code	Size	Type	Profile Color	Mounting	Length*	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50X80mm	GL General Lighting	WH White BK Black RA Raw Anodized	T Trim Surface L Trimless Recessed P Pendant Down	028 280mm 056 560mm 112 1120mm	06 6.1W 790lm 250mA 24.5V 12 12.3W 1520lm 250mA 49.1V 24 24.5W 3165lm 250mA 98.2V	GL 100°	830 3000K CRI>80 840 4000K CRI>80 865 6500K CRI>80	ND Non-dim AN 1-10V DA DALI

VARIUS General Lighting Up-Down

IP40 LED F

- Profile system made of extruded aluminum with 50mm width
- General lighting module included for basic illumination
- Various types of installation available (pendant/surface-mounted/recessed)

Pendant

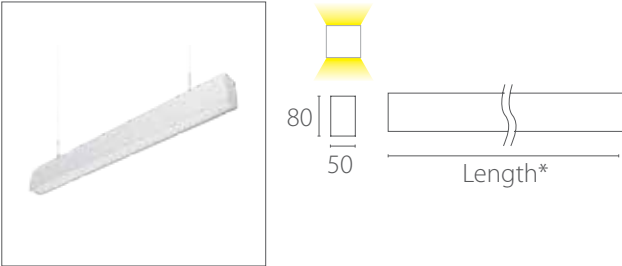

Pendant Up-Down

Finish




Order Guide										
Product Code	Size	Type	Profile Color	Mounting	Length*	Wattage		Beam Angle	CCT	Control Gear
VRS	2 50X80mm	GL General Lighting	WH White BK Black RA Raw Anodized	U Pendant Up-Down	056 560mm	18 12.3W 1520lm 250mA + 250mA 49.1V	6.1W 790lm 24.5V	GL 100°	830 3000K CRI>80 840 4000K CRI>80 865 6500K CRI>80	ND Non-dim 1-10V AN 1-10V DA DALI
					112 1120mm	37 24.5W 3165lm 250mA + 250mA 98.2V	12.3W 1520lm 24.5V			

VARIUS Accent Lighting


IP40 LED F

- Profile system made of extruded aluminum with 50mm width
- Accent lighting module included with various color options
- Various types of installation available (pendant/surface-mounted/recessed)

Trim

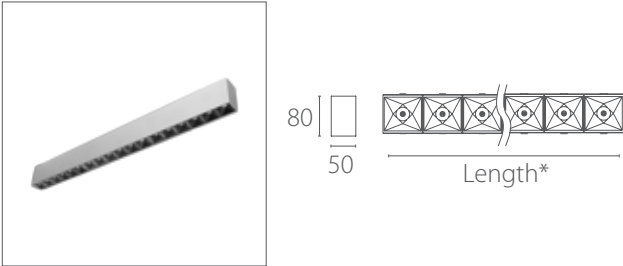


Trim Surface

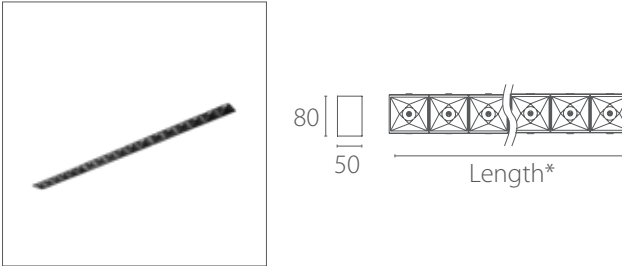


Trimless Recessed

Pendant

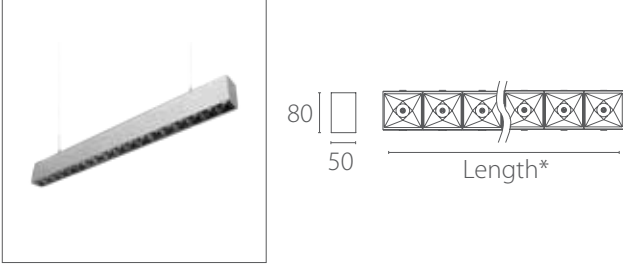

Pendant Down

Finish


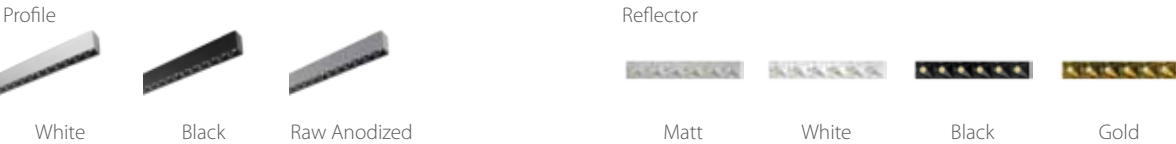


Order Guide										
Product Code	Size	Type	Profile Color	Reflector Color	Mounting	Length*	Wattage	Beam Angle	CCT	Control Gear
VRS	2 50X80mm	AL Accent Lighting	WH White BK Black RA Raw Anodized	MT Matt WH White BK Black GD Gold	T Trim Surface L Trimless Recessed P Pendant Down	028 280mm 056 560mm 084 840mm 112 1120mm	15 15W 1100lm 30 30W 2200lm 45 45W 3300lm 60 60W 4400lm	FL 40°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim 1-10V AN 1-10V DA DALI

VARIUS Wallwasher Lighting

IP40 LED F



- Profile system made of extruded aluminum with 50mm width
- Wallwasher lighting module included
- Various types of installation available (pendant/surface-mounted/recessed)

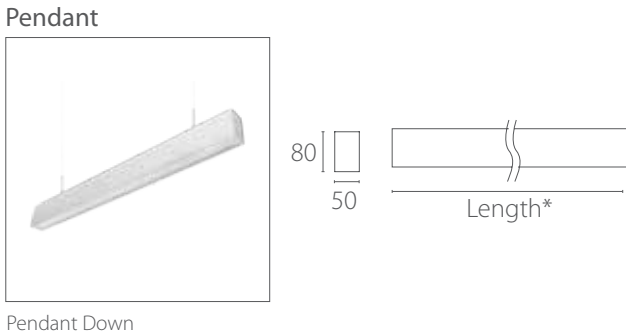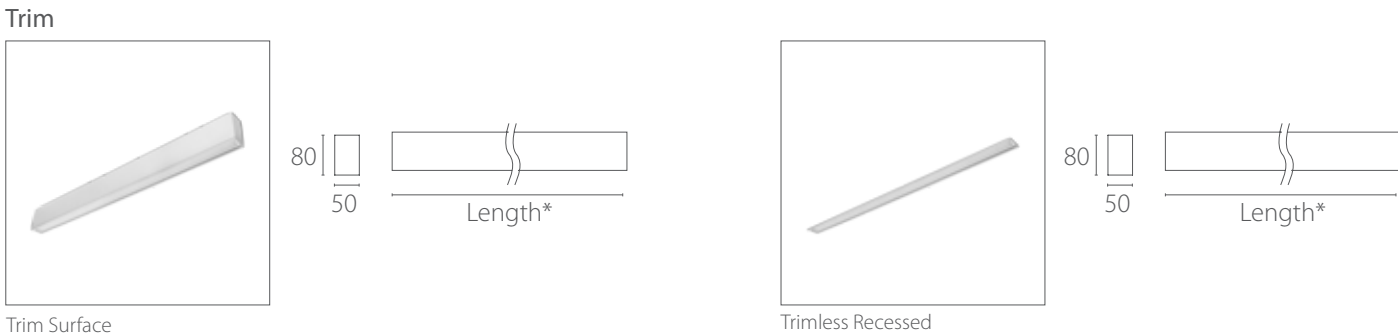

Order Guide										
V	R	S	-	2	-	W	W	-	-	-
Product Code	Size	Type	Profile Color	Mounting	Length*	Wattage	Beam Angle	CCT	Control Gear	
VRS	2 50X80mm	WW Wall-washer Lighting	WH White BK Black RA Raw Anodized	T Trim Surface L Trimless Recessed P Pendant Down	028 280mm 056 560mm 084 840mm 112 1120mm	08 8W 600lm 13 13W 1200lm 18 18W 1700lm 26 26W 2400lm	WW Wall-washer	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim 1-10V DA DALI	

VARIUS Combo General Accent Light IP40 LED F




- Profile system made of extruded aluminum with 50mm width
- Accent lighting module included with various color options combined with general lighting module
- Various types of installation available (pendant/surface-mounted/recessed)

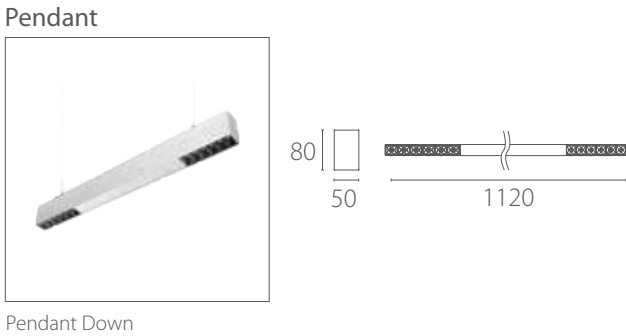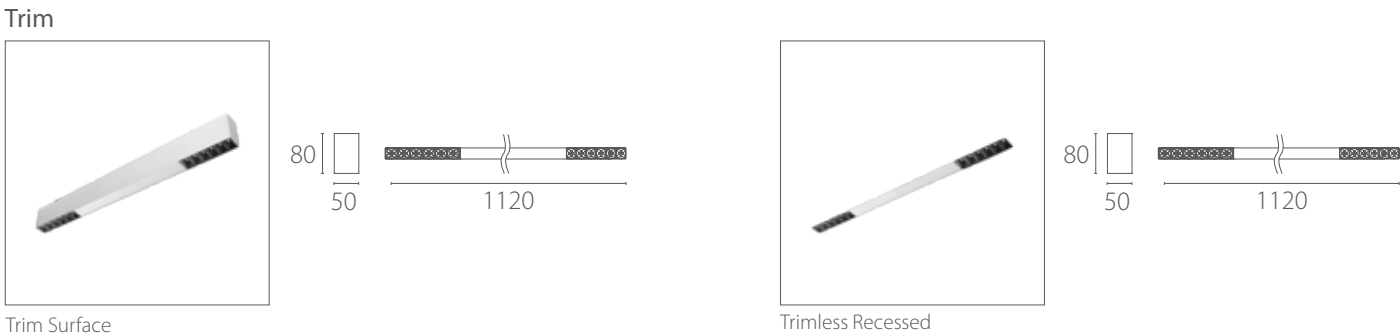

Order Guide												
V	R	S	-	2	-	2	A	L	-	G	L	-
Product Code	Size	Type	Reflector Color	Type	Length	Profile Color	Mounting	Wattage	Beam Angle	CCT	Control Gear	
VRS	2 50X80mm	2AL 2 Accent Lighting	MT Matt WH White BK Black GD Gold	GL General Lighting	112 1120mm	WH White BK Black RA Raw Anodized	T Trim Surface L Trimless Recessed P Pendant Down	42 42.3W 4100lm	FL 40°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim 1-10V DA DALI	

VARIUS Combo General Spotlight

- Profile system made of extruded aluminum with 50mm width
- Spotlight lighting module included combined with general lighting module
- Various types of installation available (pendant/surface-mounted/recessed)

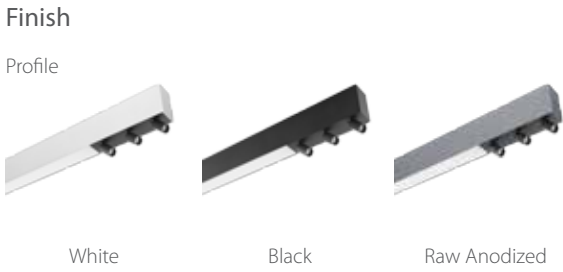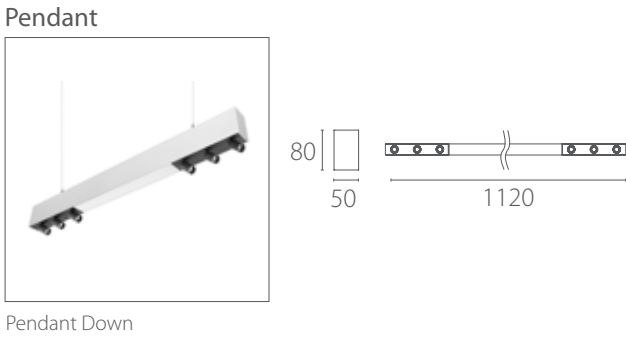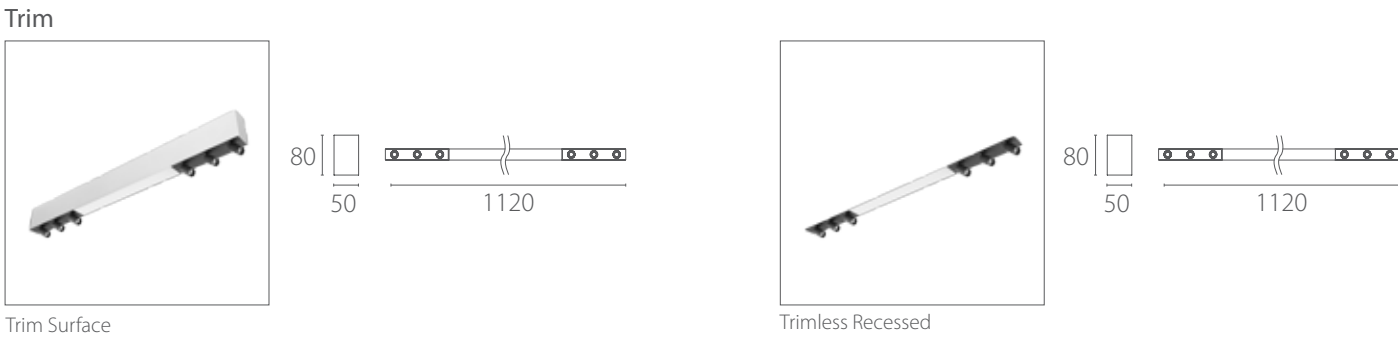

Order Guide																						
V R S	-	2	-	2 S L	-	B K	-	G L	-	1 1 2	-		-		-	4 2	-		-		-	
Product Code	Size	Type	Color	Type	Length	Profile Color	Mounting	Wattage	Beam Angle	CCT	Control Gear											
VRS	2 50X80mm	2SL 2 Spot-lighting	BK Black	GL General Lighting	112 1120mm	WH White BK Black RA Raw Anodized	T Trim Surface L Trimless Recessed P Pendant Down	42 42.3W 4100lm	SP 15° MD 30° WF 55°	830 3000K CRI>80 840 4000K CRI>80	ND Non-dim AN 1-10V DA DALI											



LEDSTRIP

#Paint with Light




APPLICATION


Cove lighting, architectural lights for canopy, corridor, window, archway, backlight or edge lighting for signage, diy lights for home use, decorative lights for holiday, event, show, exhibition, decorative lights for automobile, Ideal replacement of incandescent and fluorescent light.

INSTALLATION/MOUNTING

LEDStrip IP20: LEDStrip mounted on the surface through the use of adhesive tape.
LEDStrip IP65: LEDStrip mounted on the surface through the use of mounting clips.

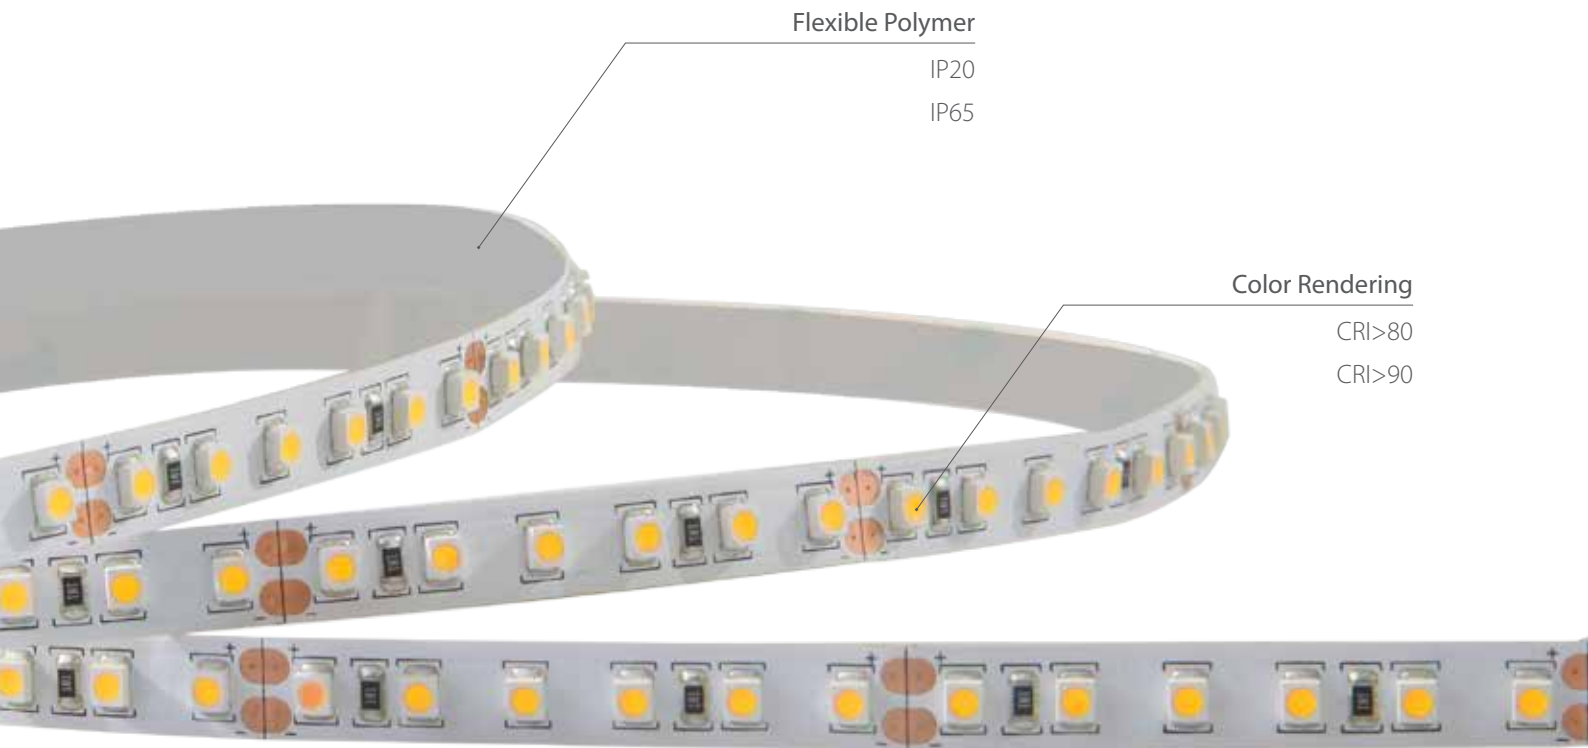

- LEDSTRIP LS5E2**    
- Made from flexible polymer and silicon sleeved for LED Protection
 - Mounted on the surface through the use of adhesive tape for IP20
 - Maximum connection 10 m
 - Color Temperature options : 2700K, 3000K, 4000K, & 6500K
 - CRI> 80

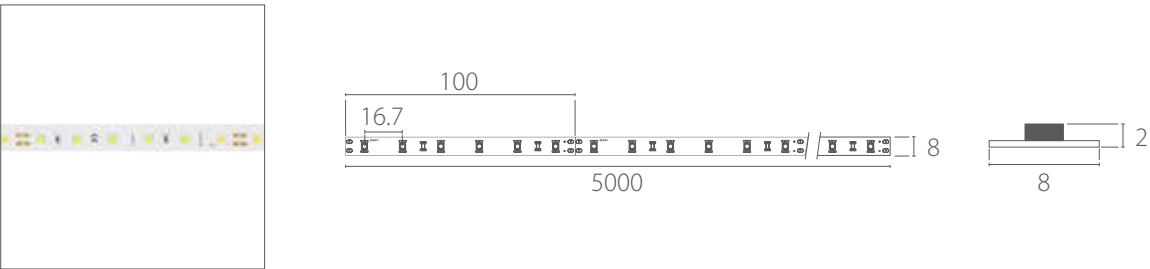

Step Length	Number LED
100mm/6LED	300 LED, 16.7mm LED pitch

Wattage	Lumens/m			
	2700K	3000K	4000K	6500K
4.8W/m	419lm	424lm	437lm	459lm


Order Guide

L S 5 E 2 - - 2 0 - 2 4			
Product Code	CCT	Ingress Protection	Voltage
LS5E2 4.8W/m	827 2700K CRI>80	20 IP20	24 24V
	830 3000K CRI>80		
	840 4000K CRI>80		
	865 6500K CRI>80		

LEDSTRIP LS7E2




- Made from flexible polymer and silicon sleeved for LED Protection
- Mounted on the surface through the use of adhesive tape for IP20
- Maximum connection 10 m
- Color Temperature options : 2700K, 3000K, 4000K, & 6500K
- CRI> 80

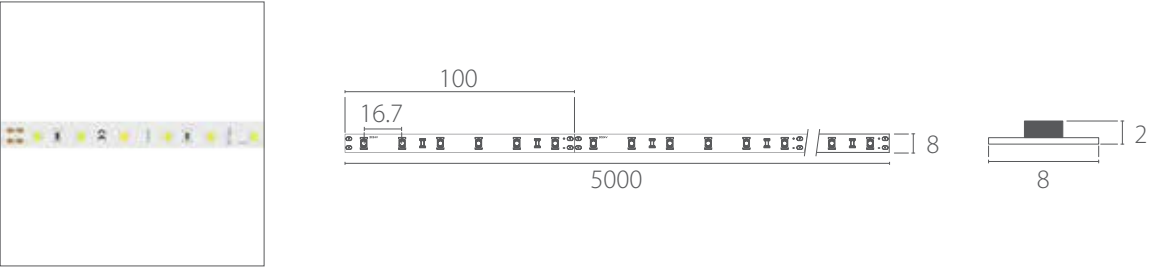

Step Length		Number LED			
100mm/6LED		300 LED, 16.7mm LED pitch			


Wattage		Lumens/m			
7.2W/m	2700K	3000K	4000K	6500K	
	628lm	636lm	655lm	688lm	

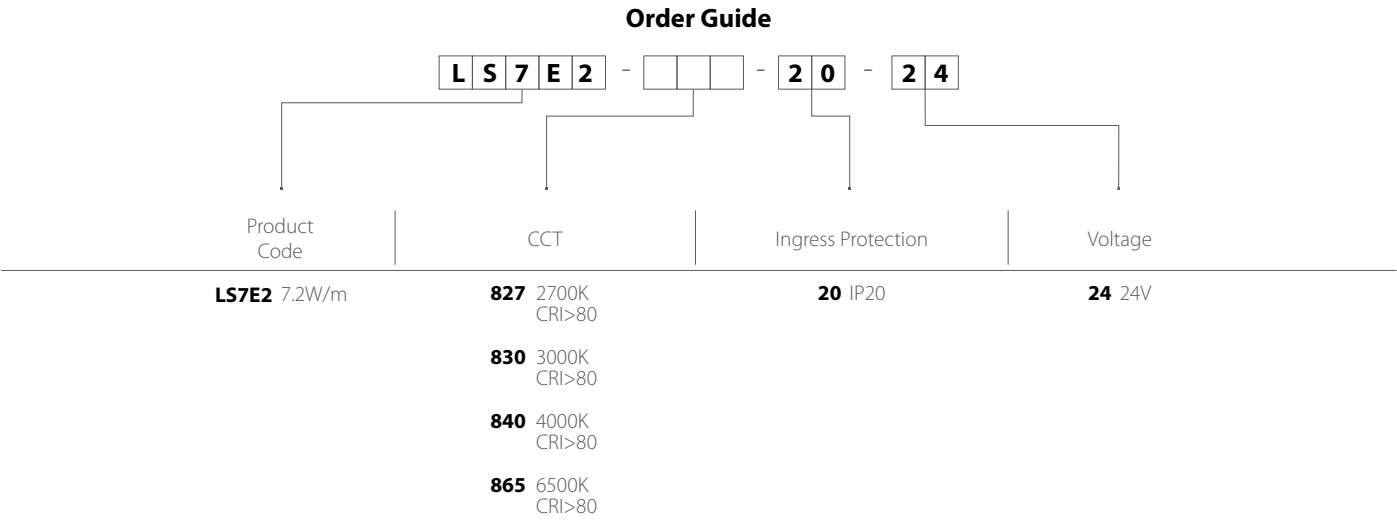

LEDSTRIP LS10E2




- Made from flexible polymer and silicon sleeved for LED Protection
- Mounted on the surface through the use of adhesive tape for IP20
- Maximum connection 10 m
- Color Temperature options : 2700K, 3000K, 4000K, & 6500K
- CRI> 80

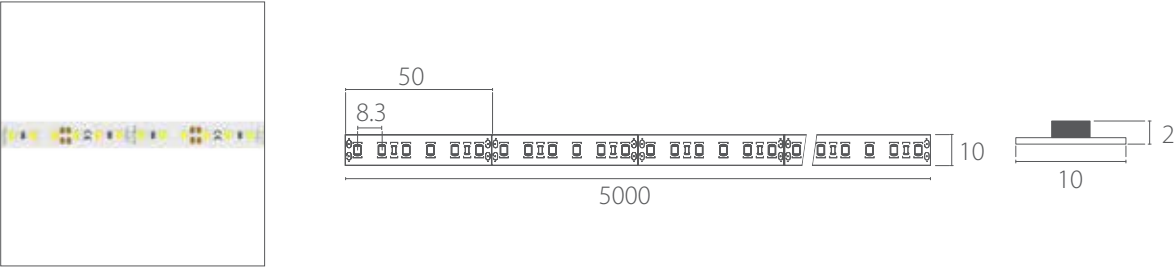

Step Length		Number LED			
50mm/6LED		600 LED, 8.3mm LED pitch			


Wattage		Lumens/m			
9.6W/m	2700K	3000K	4000K	6500K	
	830lm	840lm	865lm	908lm	

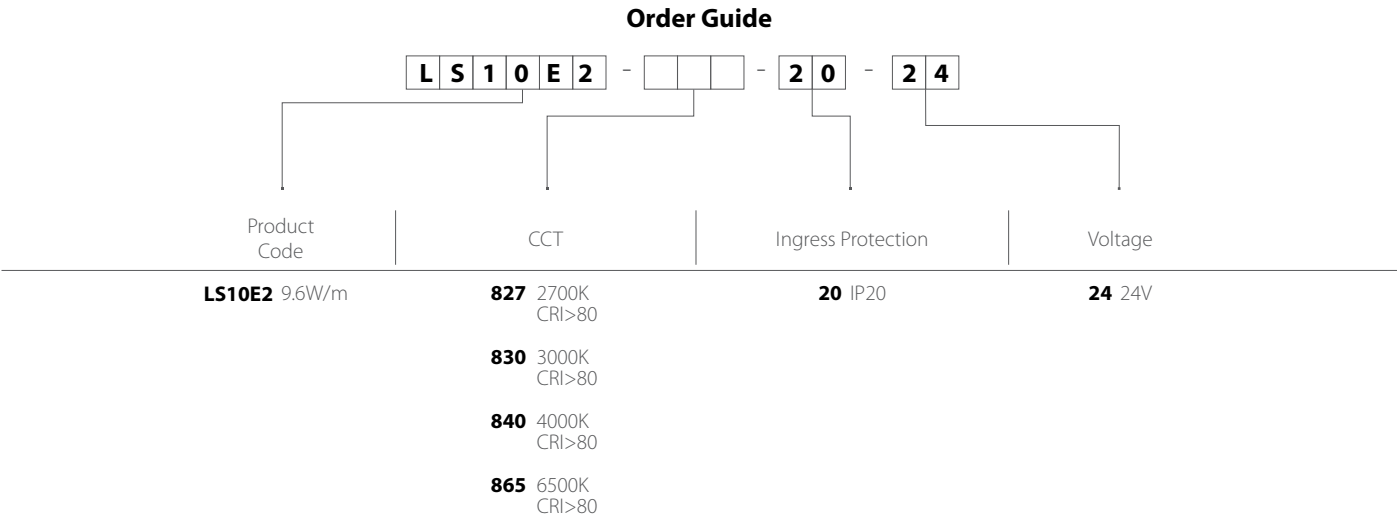

LEDSTRIP LS14E2



- Made from flexible polymer and silicon sleeved for LED Protection
- Mounted on the surface through the use of adhesive tape for IP20
- Maximum connection 10 m
- Color Temperature options : 2700K, 3000K, 4000K, & 6500K
- CRI> 80

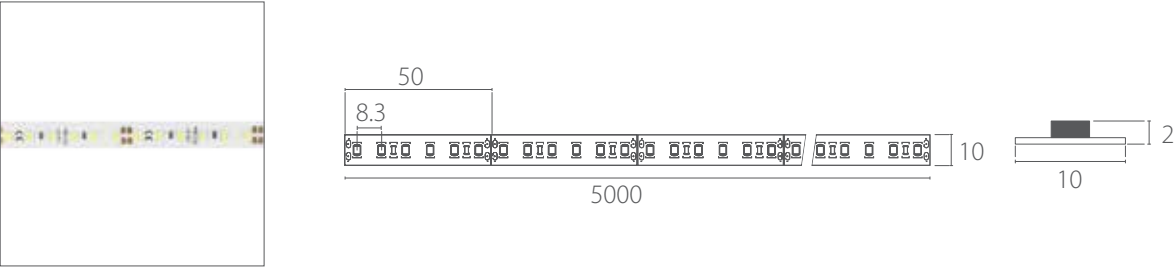

Step Length		Number LED			
50mm/6LED		600 LED, 8.3mm LED pitch			
Wattage		Lumens/m			
	2700K	3000K	4000K	6500K	
14.4W/m	1245lm	1260lm	1297lm	1362lm	


Order Guide

L S 1 4 E 2		- 2 0		- 2 4	
Product Code		CCT		Ingress Protection	
LS14E2		827 2700K CRI>80		20 IP20	
14.4W/m		830 3000K CRI>80		24 24V	
		840 4000K CRI>80			
		865 6500K CRI>80			

LEDSTRIP LS5HC2



- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m
- CRI>90

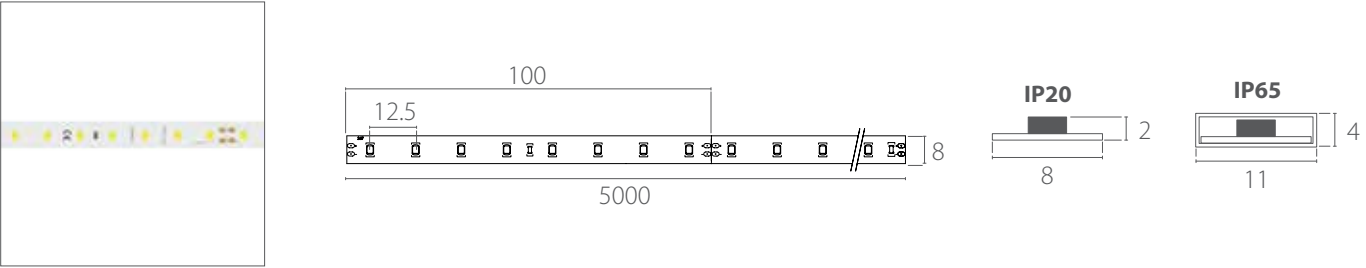

Step Length		Number LED							
100mm/8LED		400 LED, 12.5mm LED pitch							
Wattage		Lumens/m							
	2700K	3000K		4000K		6500K			
	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65	
4.8W/m	654lm	634lm	667lm	647lm	706lm	684lm	719lm	697lm	


Order Guide

L S 5 H C 2		- 2 0		- 2 4	
Product Code		CCT		Ingress Protection	
LS5HC2		927 2700K CRI>90		20 IP20	
4.8W/m		930 3000K CRI>90		65 IP65	
		940 4000K CRI>90		24 24V	
		965 6500K CRI>90			

LEDSTRIP LS7HC2

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m
- CRI>90

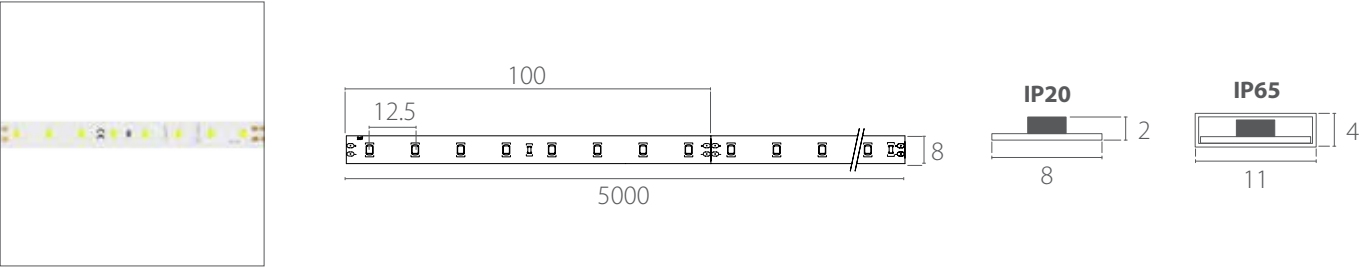

Step Length	Number LED	
	100mm/8LED	400 LED, 12.5mm LED pitch

Wattage	Lumens/m							
	2700K		3000K		4000K		6500K	
7.2W/m	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
	907lm	880lm	925lm	897lm	979lm	949lm	997lm	967lm


Order Guide

L S 7 H C 2 - - - 2 4			
Product Code	CCT	Ingress Protection	Voltage
LS7HC2 7.2W/m	927 2700K CRI>90	20 IP20	24 24V
	930 3000K CRI>90	65 IP65	
	940 4000K CRI>90		
	965 6500K CRI>90		

LEDSTRIP LS10HC2

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m
- CRI>90

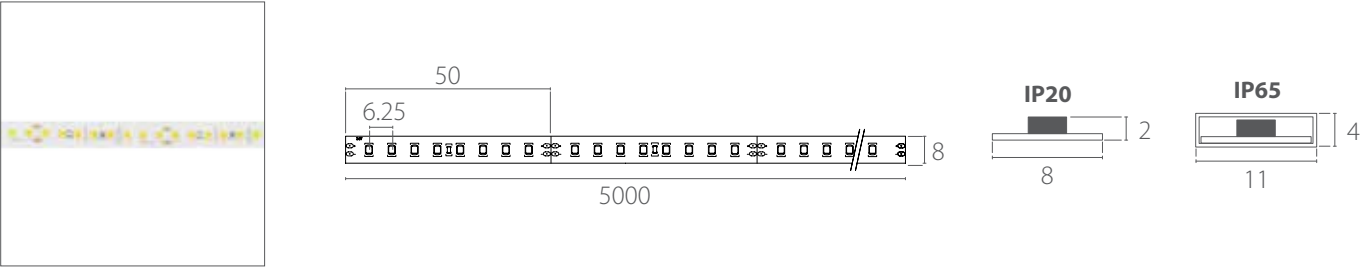

Step Length	Number LED	
	50mm/8LED	800 LED, 6.25mm LED pitch

Wattage	Lumens/m							
	2700K		3000K		4000K		6500K	
9.6W/m	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
	1309lm	1270lm	1335lm	1295lm	1413lm	1370lm	1440lm	1340lm


Order Guide

L S 1 0 H C 2 - - - 2 4			
Product Code	CCT	Ingress Protection	Voltage
LS10HC2 9.6W/m	927 2700K CRI>90	20 IP20	24 24V
	930 3000K CRI>90	65 IP65	
	940 4000K CRI>90		
	965 6500K CRI>90		

LEDSTRIP LS14HC2

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m
- CRI>90

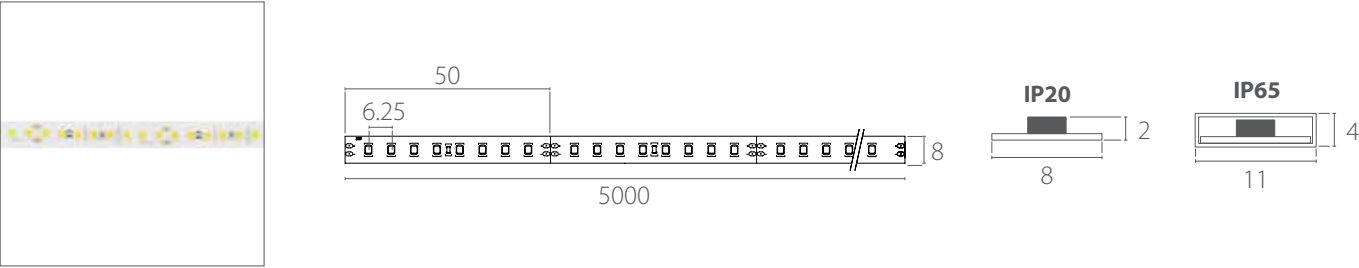

Step Length	Number LED							
50mm/8LED	800 LED, 6.25mm LED pitch							
Wattage	Lumens/m							
	2700K		3000K		4000K		6500K	
	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
14.4W/m	1891lm	1834lm	1928lm	1870lm	2042lm	1980lm	2086lm	2023lm


Order Guide

L S 1 4 H C 2						2 4	
Product Code		CCT		Ingress Protection		Voltage	
LS14HC2 14.4W/m		927 2700K CRI>90		20 IP20 65 IP65		24 24V	
		930 3000K CRI>90					
		940 4000K CRI>90					
		965 6500K CRI>90					

LEDSTRIP LS19HC2

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 5 m
- CRI>90

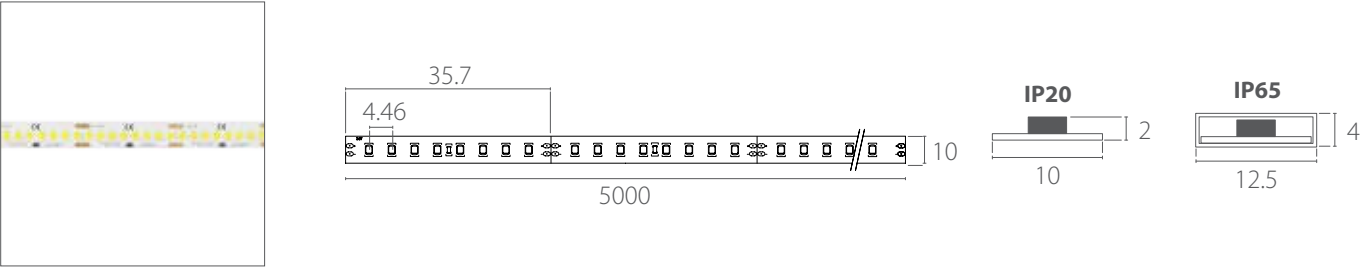

Step Length		Number LED							
35.7mm/8 LED		1120 LED, 4.46mm LED pitch							
Wattage		Lumens/m							
		2700K		3000K		4000K		6500K	
		IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
19.2W/m		2598lm	2520lm	2650lm	2570lm	2806lm	2721lm	2858lm	2772lm


Order Guide

L S 1 9 H C 2						2 4	
Product Code		CCT		Ingress Protection		Voltage	
LS19HC2 19.2W/m		927 2700K CRI>90		20 IP20 65 IP65		24 24V	
		930 3000K CRI>90					
		940 4000K CRI>90					
		965 6500K CRI>90					

LEDSTRIP LS23HC2

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature, 2400K & 3500K by request
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 5 m
- CRI>90

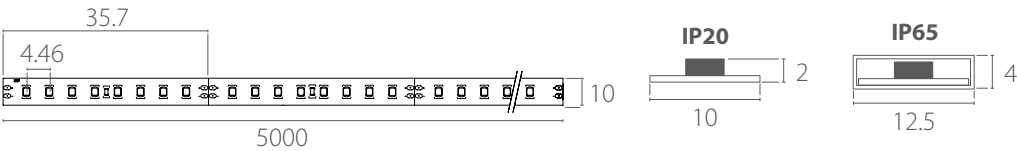


Step Length		Number LED	
35.7mm/8 LED		1120 LED, 4.46mm LED pitch	
Wattage		Lumens/m	
		2700K	3000K
		IP20	IP65
23W/m		2870lm	2784lm
		4000K	6500K
		IP20	IP65
		3100lm	3007lm
		3157lm	3062lm

Order Guide			
L S 2 3 H C 2 - - - 2 4			
Product Code	CCT	Ingress Protection	Voltage
LS23HC2	927	20	24
23W/m	2700K CRI>90	IP20	24V
	930	65	
	3000K CRI>90	IP65	
	940		
	4000K CRI>90		
	965		
	6500K CRI>90		

LEDSTRIP Side Bend LS5SB

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in 2700K, 3000K, 4000K, and 6500K color temperature
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m
- CRI>80

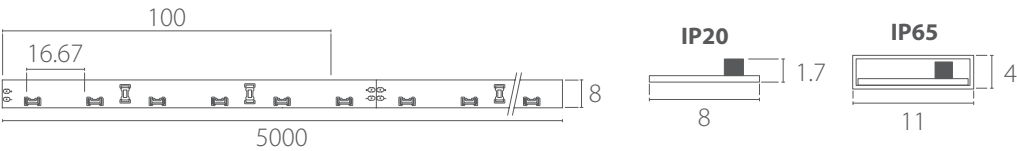


Step Length		Number LED	
100mm/6 LED		300 LED, 16.67mm LED pitch	
Wattage		Lumens/m	
		2700K	3000K
		IP20	IP65
4.8W/m		600lm	570lm
		4000K	6500K
		IP20	IP65
		680lm	720lm
		646lm	684lm

Order Guide			
L S 5 S B - - - 2 4			
Product Code	CCT	Ingress Protection	Voltage
LS5SB	827	20	24
4.8W/m	2700K CRI>80	IP20	24V
	830	65	
	3000K CRI>80	IP65	
	840		
	4000K CRI>80		
	865		
	6500K CRI>80		

LEDSTRIP Color5




- Made from flexible polymer and silicon sleeved for LED Protection
- Available in red, green, blue, and yellow color
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m

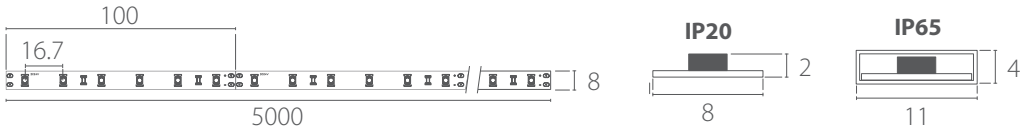

Wattage	Lumens/m							
	Red		Green		Blue		Yellow	
	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
4.8W/m	150lm	138lm	235lm	219lm	90lm	83lm	170lm	154lm


Order Guide

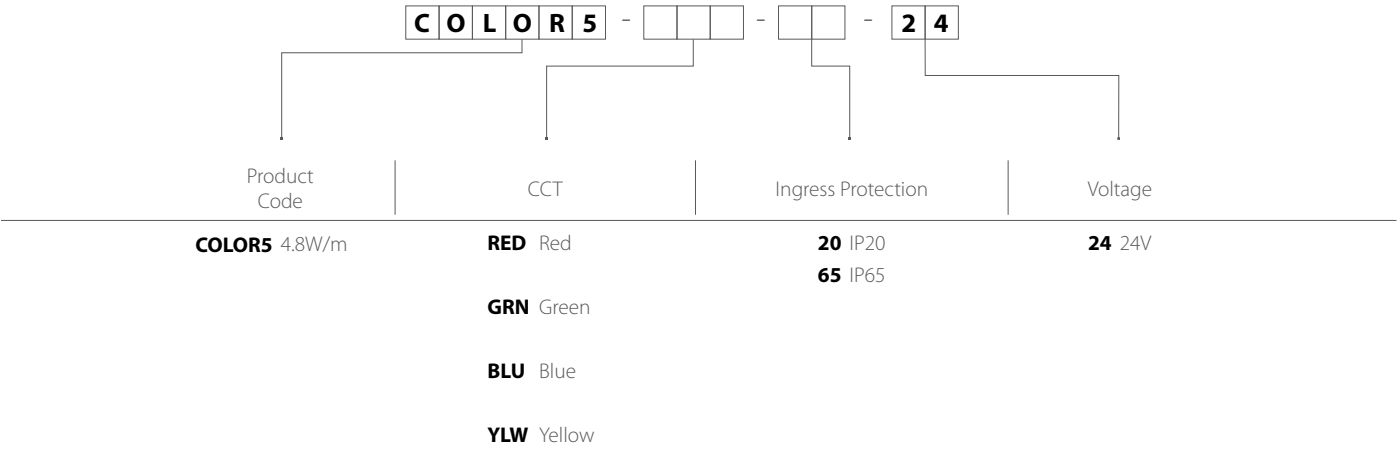

LEDSTRIP Color10




- Made from flexible polymer and silicon sleeved for LED Protection
- Available in red, green, blue, and yellow color
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Available in IP20 and IP65
- Maximum connection 10 m

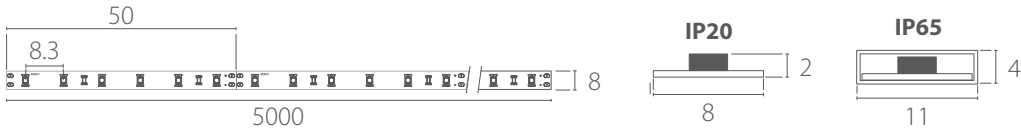

Wattage	Lumens/m							
	Red		Green		Blue		Yellow	
	IP20	IP65	IP20	IP65	IP20	IP65	IP20	IP65
9.6W/m	294lm	276lm	440lm	414lm	187lm	174lm	365lm	339lm


Order Guide

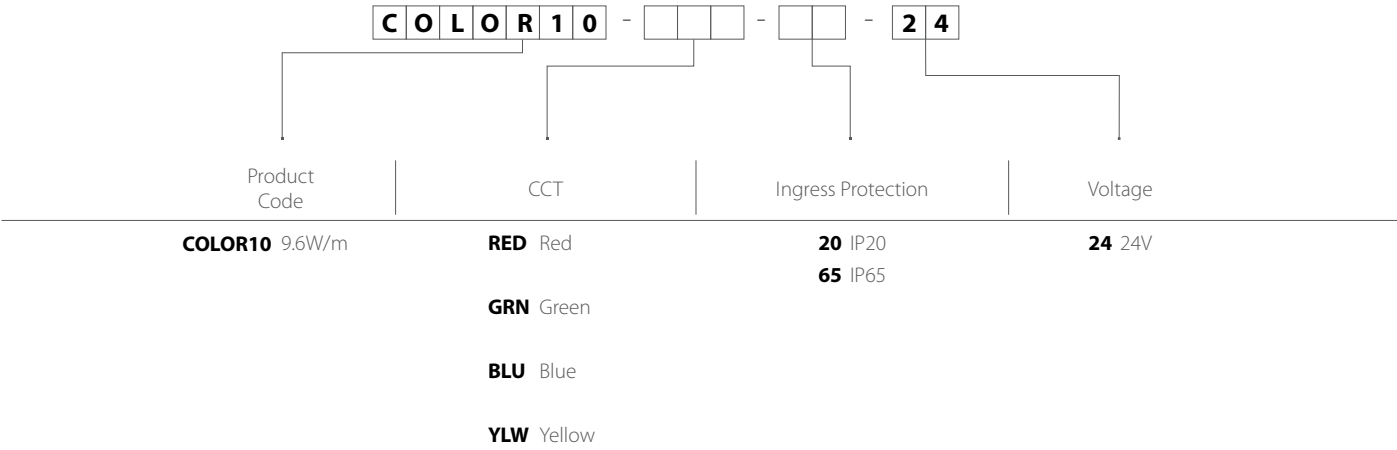

LEDSTRIP RGB7


IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in IP20 and IP65
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Maximum connection 10 m

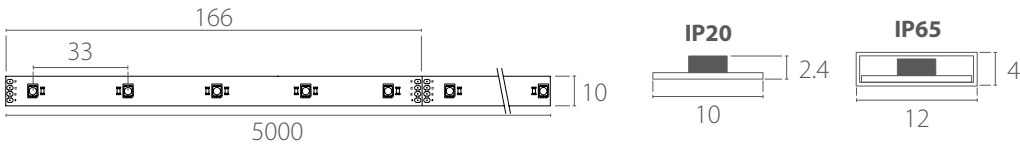

Step Length	Number LED	
166mm/5 LED	150 LED, 33.3mm LED pitch	
Wattage	Lumens/m	
	RGB	
7.2W/m	IP20	IP65
	248lm	234lm


Order Guide

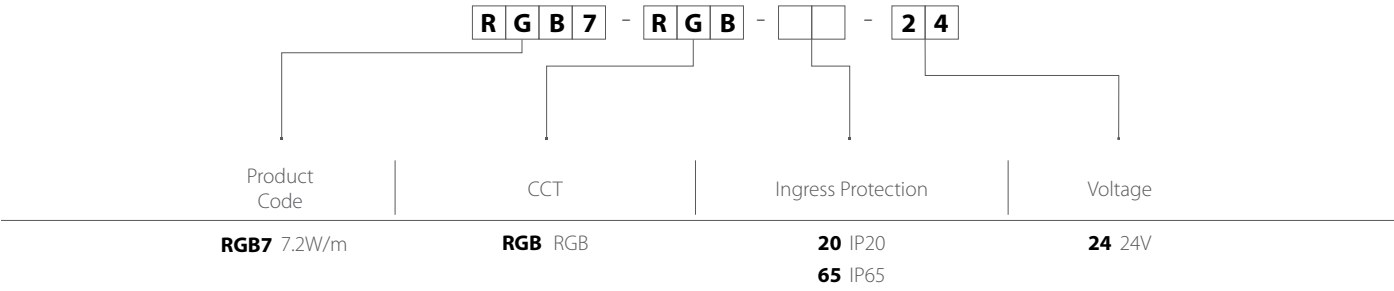

LEDSTRIP RGB14


IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in IP20 and IP65
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Maximum connection 10 m

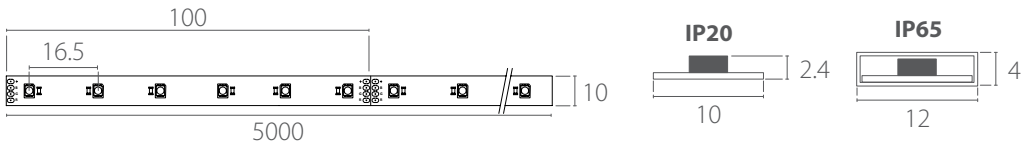

Step Length	Number LED	
100mm/6 LED	300 LED, 16.5 mm LED pitch	
Wattage	Lumens/m	
	RGB	
14.4W/m	IP20	IP65
	514lm	504lm


Order Guide

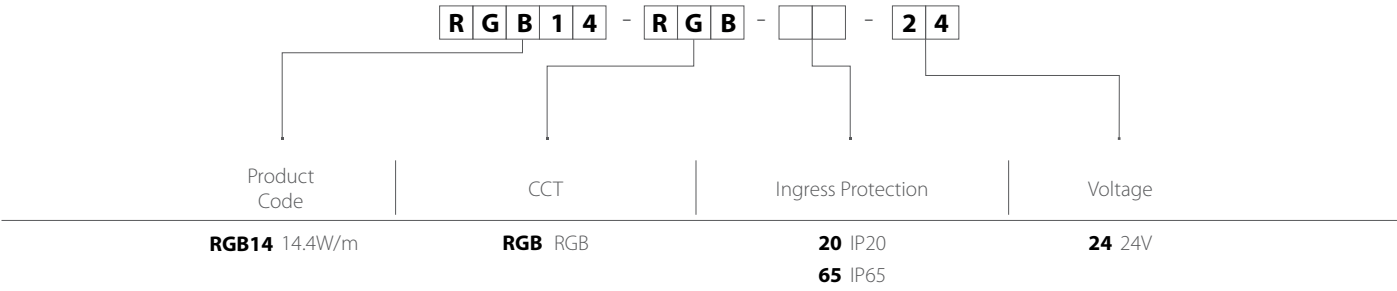


LEDSTRIP RGBW14

IP20/IP65 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in IP20 and IP65
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Maximum connection 5 m for IP20, and 10 m for IP65

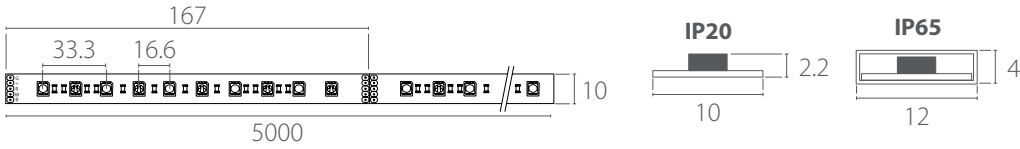



Step Length		Number LED	
167mm/5 LED RGB + 5 LED Single Color		300 LED, 16.6 mm LED pitch	
Wattage		Lumens/m	
		RGBW + 2400K	RGBW + 2700K
		IP20 IP65	IP20 IP65
14.4W/m		786lm 746lm	812lm 787lm
		RGBW + 3000K	RGBW + 4000K
		IP20 IP65	IP20 IP65
		840lm 813lm	872lm 839lm
		RGBW + 6500K	
		IP20 IP65	
		948lm 915lm	

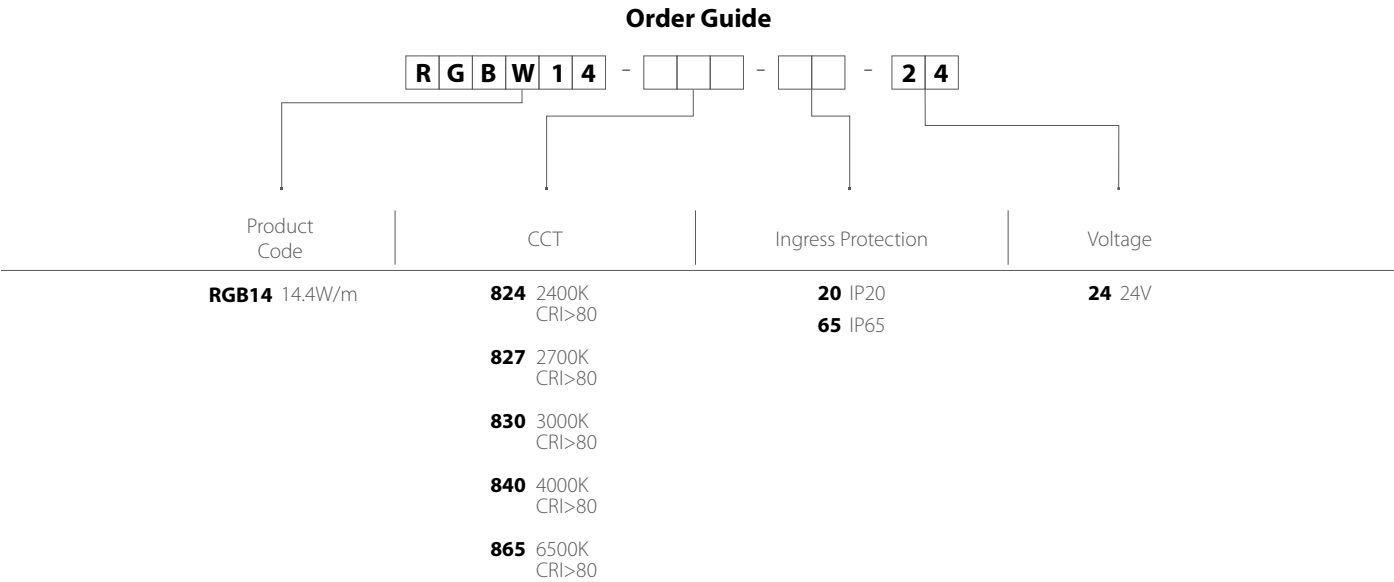


LEDSTRIP Color Tune10

IP20 LED

- Made from flexible polymer and silicon sleeved for LED Protection
- Available in IP20 and IP65
- Mounted on the surface through the use of adhesive tape for IP20 and mounting clips for IP65
- Maximum connection 10 m

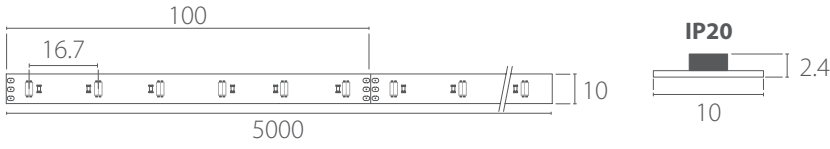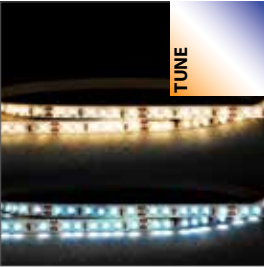


Step Length		Number LED	
100mm/6 LED		300 LED, 16.7 mm LED pitch	
Wattage		Lumens/m	
		2500K	6500K
		IP20	IP20
9.6W/m		348lm	360lm
		2500K + 6500K	
		IP20	
		708lm	

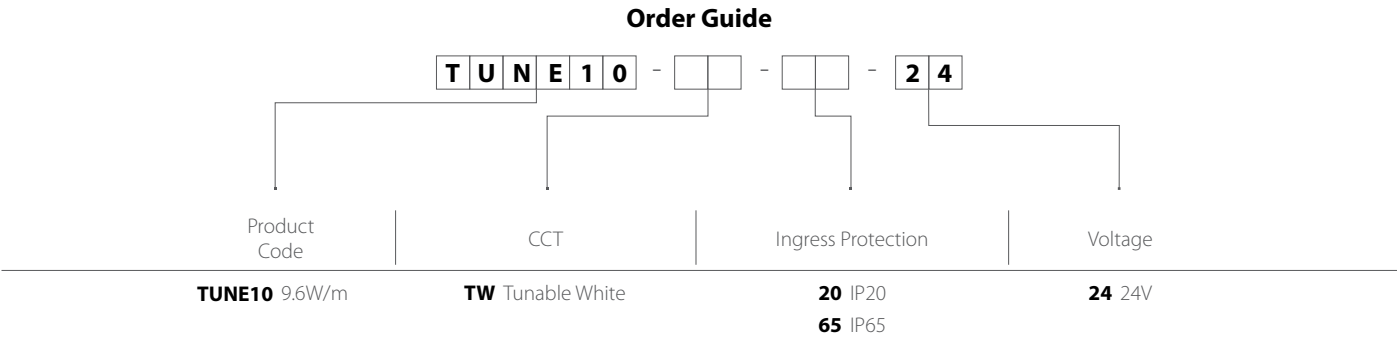

ALUMINUM PROFILE 002

- Customizable length aluminum profile for LEDStrip enclosure
- Driver power input can be connected through the end caps of the profile
- High quality aluminum material

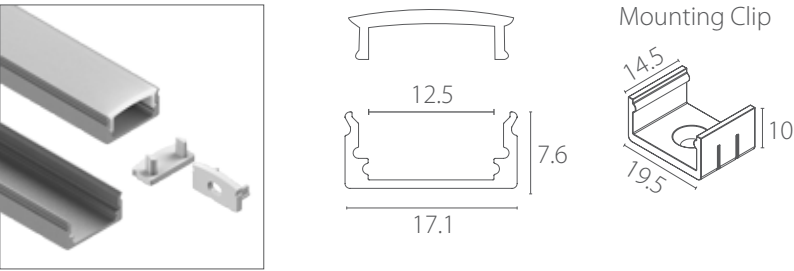

Accessories




Order Guide

A L P - 0 0 2 - - 1 0 0 0 - S E T				
Product Code	Type	Diffuser	Length	Set
ALP	002 ALP002	N None O Opal	1000 1000mm	SET Include 2 End Caps and 2 Mounting Clips per meter

ALUMINUM PROFILE 004

- Customizable length aluminum profile for LEDStrip enclosure
- Driver power input can be connected through the end caps of the profile
- High quality aluminum material

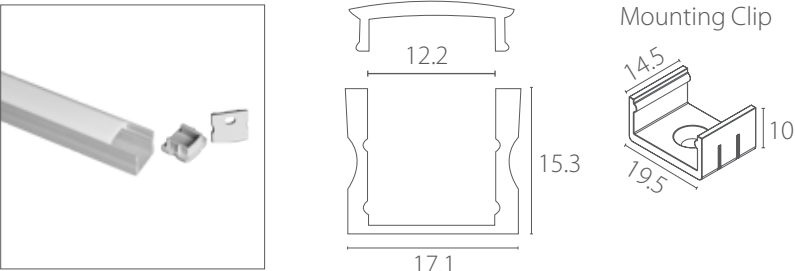

Accessories




Order Guide


A L P - 0 0 4 - - 1 0 0 0 - S E T				
Product Code	Type	Diffuser	Length	Set
ALP	004 ALP004	N None O Opal	1000 1000mm	SET Include 2 End Caps and 2 Mounting Clips per meter

ALUMINUM PROFILE 006

- Customizable length aluminum profile for LEDStrip enclosure
- Driver power input can be connected through the end caps of the profile
- High quality aluminum material

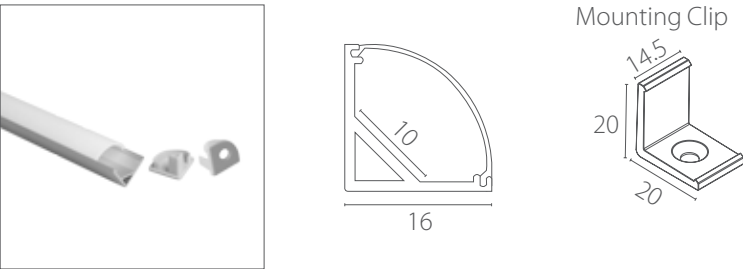


Accessories

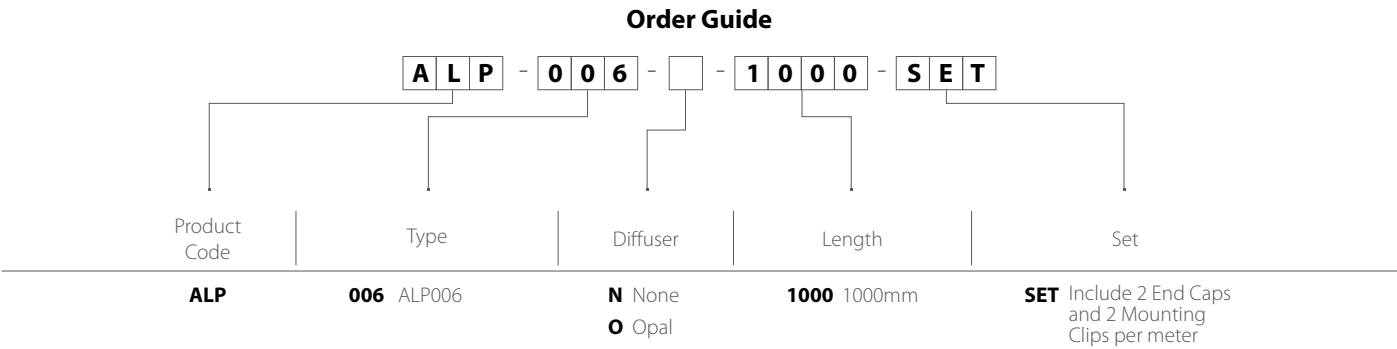


ALUMINUM PROFILE Bendable

- Customizable length aluminum profile for LEDStrip enclosure
- Driver power input can be connected through the end caps of the profile
- High quality aluminum material

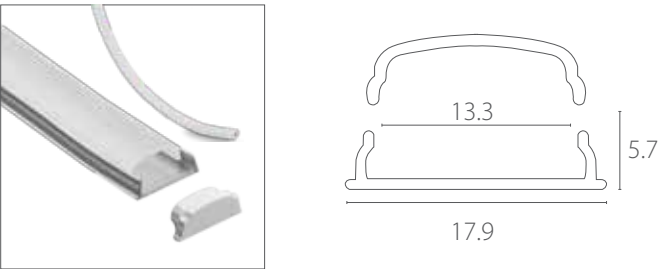

Accessories

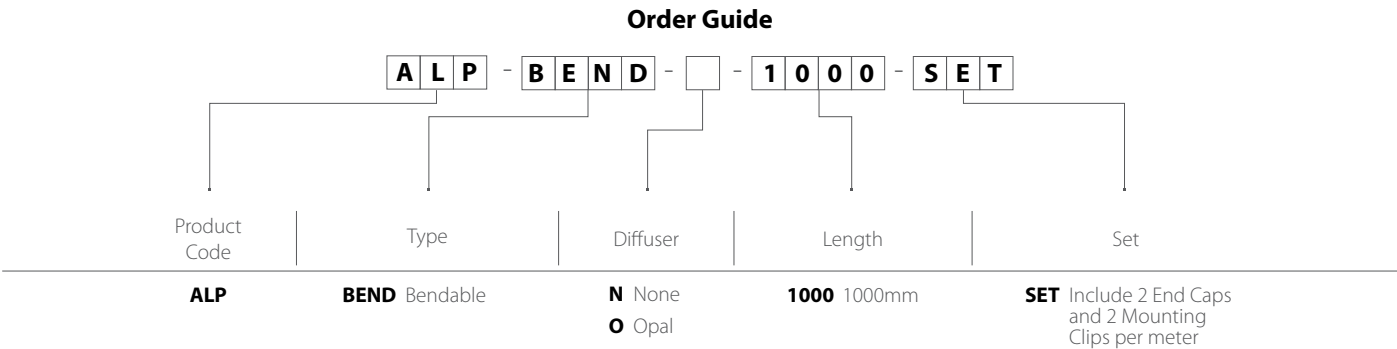

GRAZER PROFILE

#Indoor Grazing



Grazer Profile
LS14.4W | 1928lm | 3000K




COMPATIBLE WITH ALL SPECTRA LEDSTRIP

Simply combine with standard SPECTRA LEDStrip to achieve a wonderful graze effect on the wall.




RECOMMENDED MOUNTING

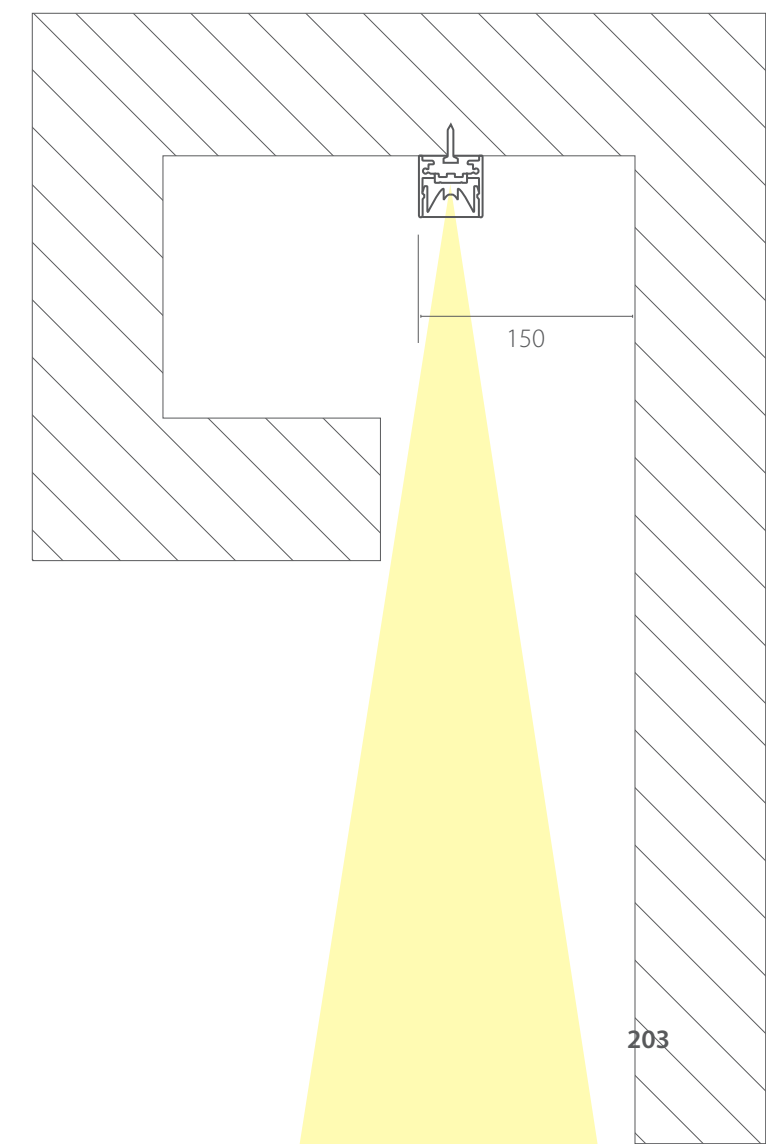

GRAZER PROFILE

IP20 LED

- Customizable length aluminum profile for LEDStrip enclosure
- Driver power input can be connected through the end caps of the profile
- High quality aluminum material



Order Guide


A L P - L N S - W G - 1 0 0 0 - S E T

Product Code	Type	Diffuser	Length	Set
ALP	LNS Lens	WG Wall Grazer	1000 1000mm	SET Include 2 End Caps and 2 Mounting Clips per meter




GRAZER

#Linear Wall Grazer

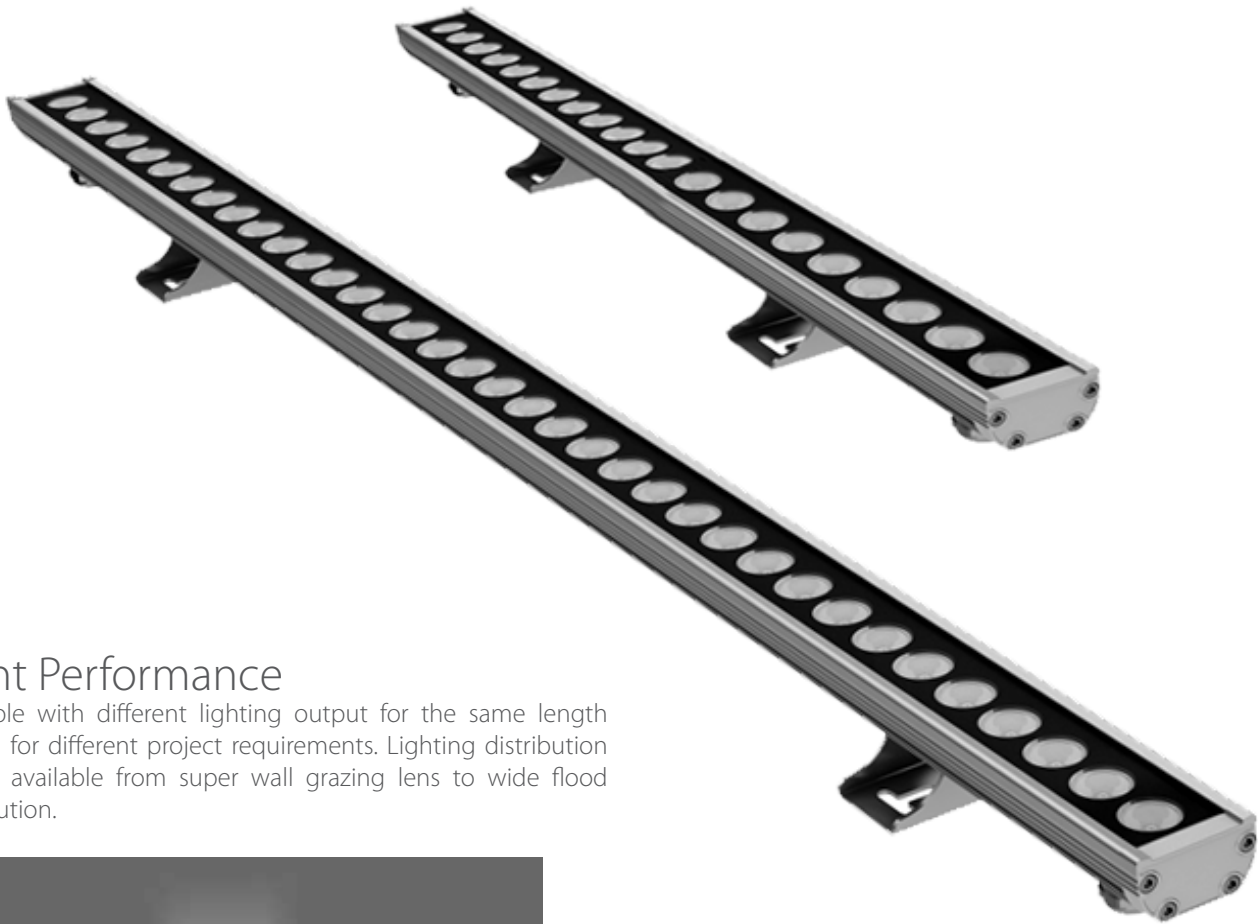


Light Performance

Available with different lighting output for the same length (lm/m) for different project requirements. Lighting distribution is also available from super wall grazing lens to wide flood distribution.

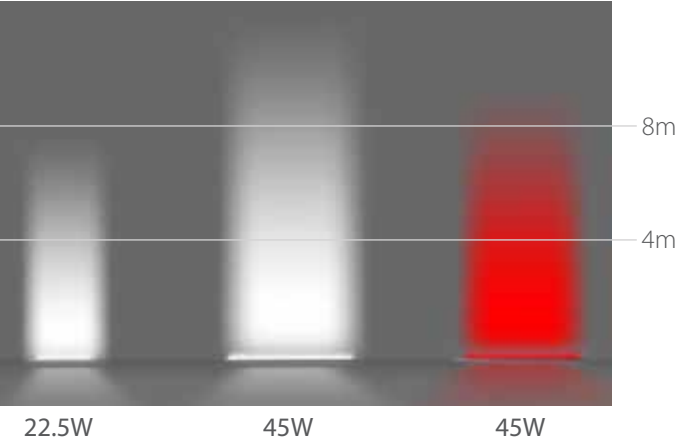

Light Distribution


Lighting distribution is interchangeable with a wide range of beam angle options for different types of application.

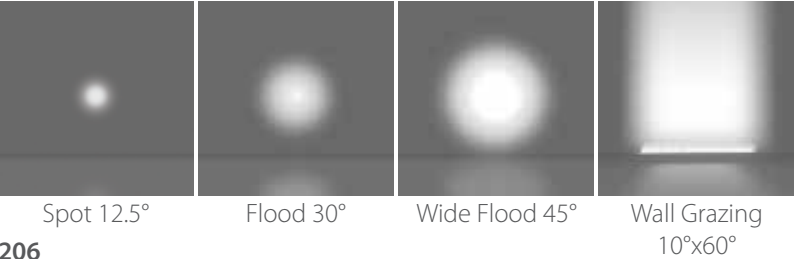

GRAZER

IP65 LED

- Surface-mounted linear luminaire with LED technology
- Extruded aluminum body with etched non-skid glass screen, die-casted aluminum end caps with IP65 protection
- Graduated ferrule, allows adjustable aim up to 90°
- Runs on 24V DC Constant Voltage
- Available in monochromatic colors (2700K, 3000K, 4000K) and dynamic RGB color
- Anti-corrosion stainless steel external screws

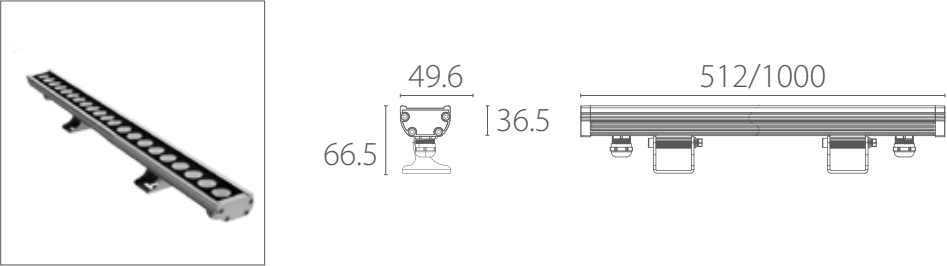

Wattage	Lumen			
	2700K	3000K	4000K	RGB
22.5W	2025lm	2250lm	2360lm	705lm
45W	4050lm	4500lm	4725lm	1410lm

Order Guide						
W G Z - - - - -						
Product Code	Length	Wattage	CCT	Beam Angle	Control Gear*	
WGZ	05 512mm	22 22.5W 24V DC	827 2700K 830 3000K 840 4000K RGB RGB	SP 12.5° FL 30° WF 45° WG 10 x 60°	ND Non-dim AN 1-10V DA DALI DX DMX 512 (for RGB)	
	10 1000mm	45 45W 24V DC				

*To be ordered separately

LAZZIO

#Miniature Spotlight



Adjustable Single
7.5W | 410lm | 25° | 2700K



Fixed



Dual



Adjustable


ADJUSTABLE
UP TO 90°



Accessories
Honeycomb Louvre

Mounting Options
Base
Stake

Color Options
Copper
White
Black

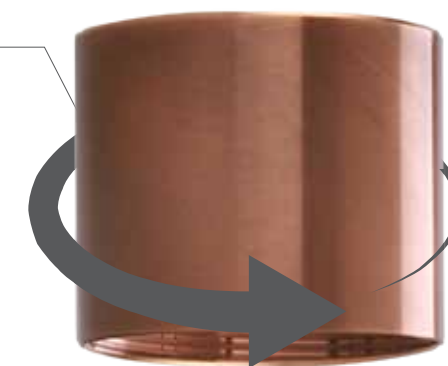

Type of lamp
GU10




LAZZIO Fixed




- Fix wall mounted luminaire
- Body formed from copper or powder coated aluminum
- The proprietary heat shield is unique and draws heat away from the lamp, extending the lamp life.
- Suitable for wet locations
- Anti-corrosion stainless steel screws



Single

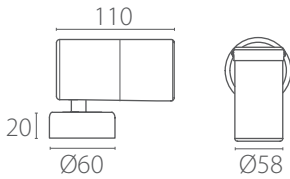

Dual

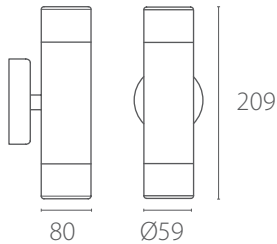

Accessories



Honeycomb Louvre

Finish

Single



Copper



White



Black

Dual



Copper




White



Black

Order Guide

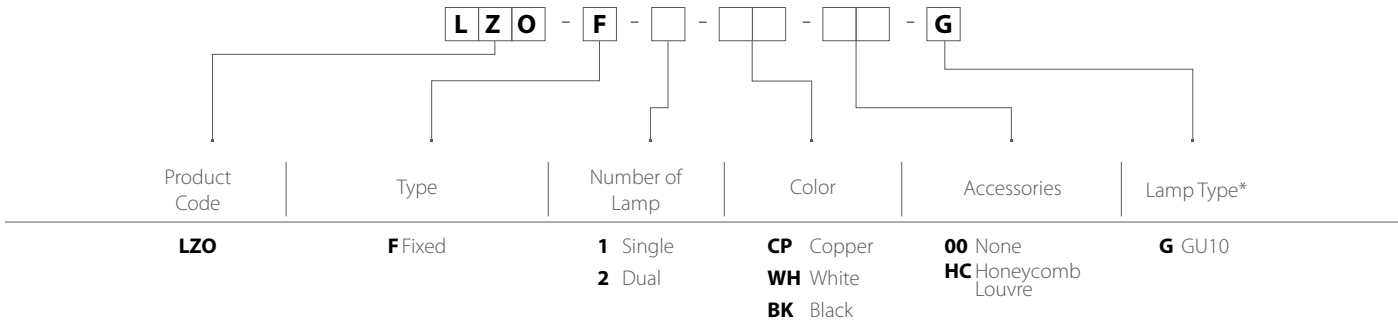


*To be ordered separately

LAZZIO Adjustable



- Adjustable wall mounted luminaire
- Body formed from copper or powder coated aluminum
- The proprietary heat shield is unique and draws heat away from the lamp, extending the lamp life.
- Suitable for wet locations
- Anti-corrosion stainless steel screws

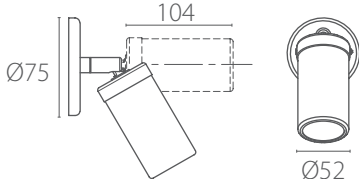

Accessories



Honeycomb Louvre

Finish

Single



Copper




White



Black

Order Guide

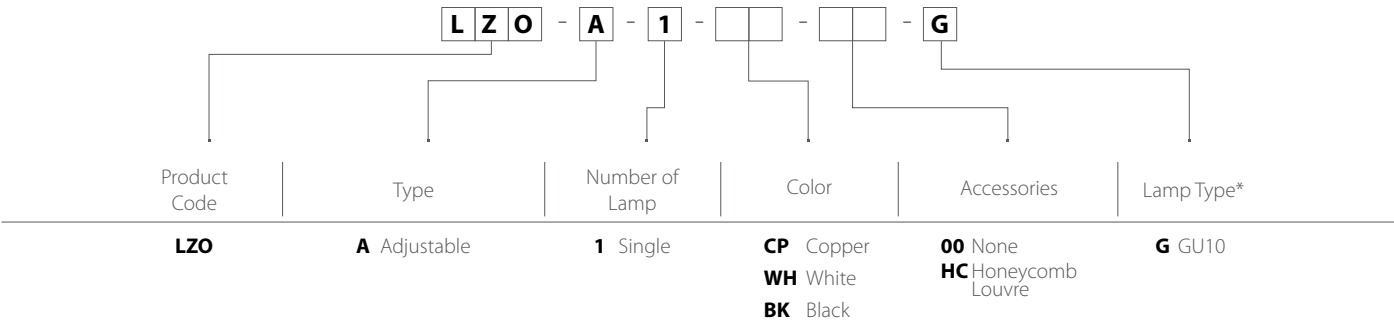

*To be ordered separately

SCOPE LED

#Miniature Spotlight



Micro | Base
Integrated Control
Gear

Mini | Base
Integrated Control
Gear

Micro | Base
External Control
Gear

Mini | Base
External Control
Gear


Mini

Stake | Black
7.2W | 450 lm | 24° | 3000K



Light Distribution

Lighting distribution is interchangeable with a wide range of beam angle options for different types of application.

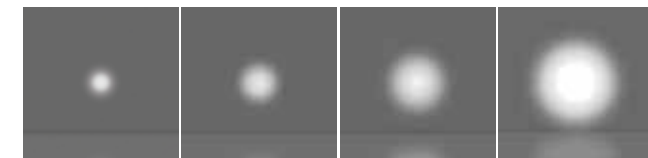

Spot 15°

Medium 24°

Flood 36°

Wide Flood 60°

Accessories

Visor (included)
Honeycomb Louvre
Linear Spread Lens

Adjustable from
-60° to +90°

Mounting Options

Base
Stake
Tree Strap
Pole



SCOPE LED Micro




- Adjustable mini spotlight with LED technology
- Die-casted aluminum body designed as heatsink to dissipate heat, transparent tempered glass, silicone gaskets and precision polymer lens
- Available in monochromatic color temperature (2700K, 3000K)
- Remote control gear/LED driver




Integrated Control Gear

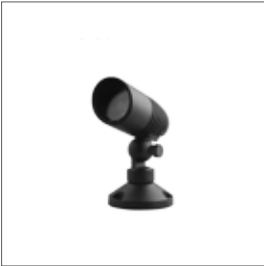

External Control Gear



Accessories

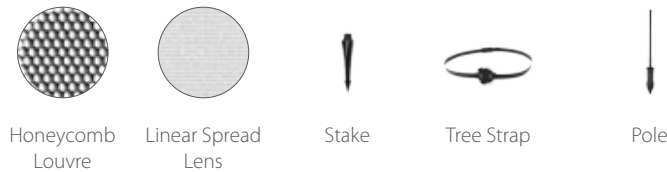

Order Guide

S C P - 1 - [] - B L - [] - [] - [] - [] - [] - N D									
Product Code	Size	Mounting	Color	Accessories	Wattage	Beam Angle	CCT	Control Gear Type	Control Gear
SCP	1 Ø48mm	B Base	BL Black	00 None	03 3W 270lm	SP 15°	827 2700K CRI>80	I Integrated	ND Non-dim
		S Stake		LS Linear Spread Lens		MD 24°			
		T Tree Strap		HC Honeycomb Louvre	06 6W 510lm	FL 36°	830 3000K CRI>80		
		P Pole		HL Honeycomb +Linear Spread Lens		WF 60°			



SCOPE LED Mini




- Adjustable mini spotlight with LED technology
- Die-casted aluminum body designed as heatsink to dissipate heat, transparent tempered glass, silicone gaskets and precision polymer lens
- Available in monochromatic color temperature (2700K, 3000K)
- Remote control gear/LED driver




Integrated Control Gear

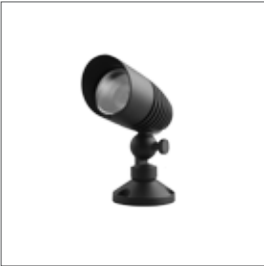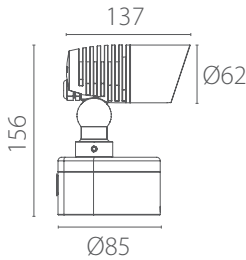

External Control Gear

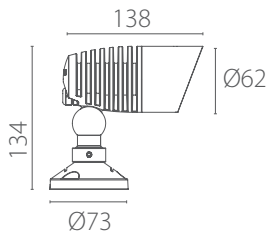

Accessories

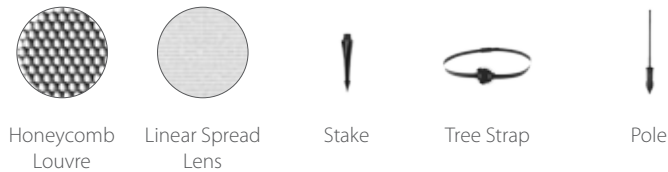

Order Guide

S C P - 2 - [] - B L - [] - [] - [] - [] - N D									
Product Code	Size	Mounting	Color	Accessories	Wattage	Beam Angle	CCT	Control Gear Type	Control Gear
SCP	2 Ø61mm	B Base S Stake T Tree Strap P Pole	BL Black	00 None LS Linear Spread Lens HC Honeycomb Louvre HL Honeycomb +Linear Spread Lens	07 7.2W 690lm 200mA 36V 13 13W 1140lm 350mA 36V 18 18W 1510lm 500mA 36V	SP 15° MD 24° FL 36° WF 60°	827 2700K CRI>80 830 3000K CRI>80	I Integrated E External	ND Non-dim

SNIPER II

#Power Projector




Sniper II
Base | Black
25W | 2312 lm | 24° | 3000K

Accessories

Visor
Honeycomb Louvre
Linear Spread Lens

Light Distribution

Lighting distribution is interchangeable with a wide range of beam angle options for different types of application.

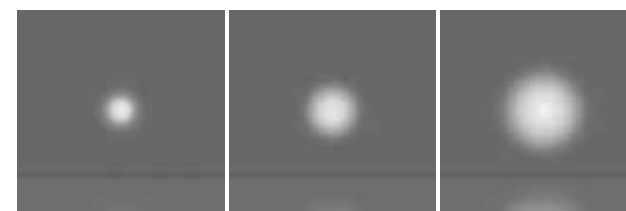

Spot 15°

Medium 24°

Flood 36°

Adjustable from
-60° to +90°

Mounting Options


Base
Stake
Tree Strap




SNIPER II

IP67 LED

- Adjustable spotlight/floodlight with monochromatic and RGB LEDs
- Die-casted aluminum body designed as heatsink to dissipate heat, transparent tempered glass, silicone gaskets and precision polymer lens
- Available in monochromatic color temperature (2700K, 3000K, 4000K) and dynamic RGB color changing
- Integrated LED driver (except for RGB version)
- Anti-corrosion stainless steel screws

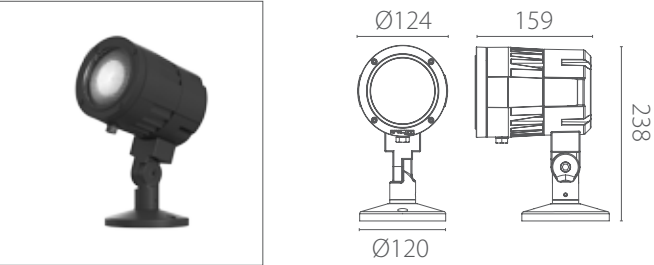

Accessories

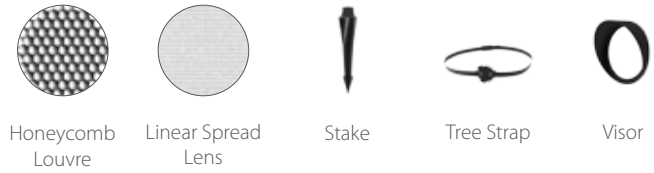

Order Guide									
S N P - 4 - BK - ND									
Product Code	Size	Mounting	Color	Visor	Accessories	Wattage	Beam Angle	CCT	Control Gear
SNP	4 Ø125mm	B Base S Stake T Tree Strap	BK Black	N None V Visor	00 None LS Linear Spread Lens HC Honeycomb Louvre HL Honeycomb + Linear Spread Lens	25 25W 2310lm 700mA 36V 33 33W 2840lm 900mA 36V	SP 15° MD 24° FL 36°	827 2700K CRI>80 830 3000K CRI>80	ND Non-dim




LADDER INDOOR

#Illuminate Your Pathway



MASK I

MASK II

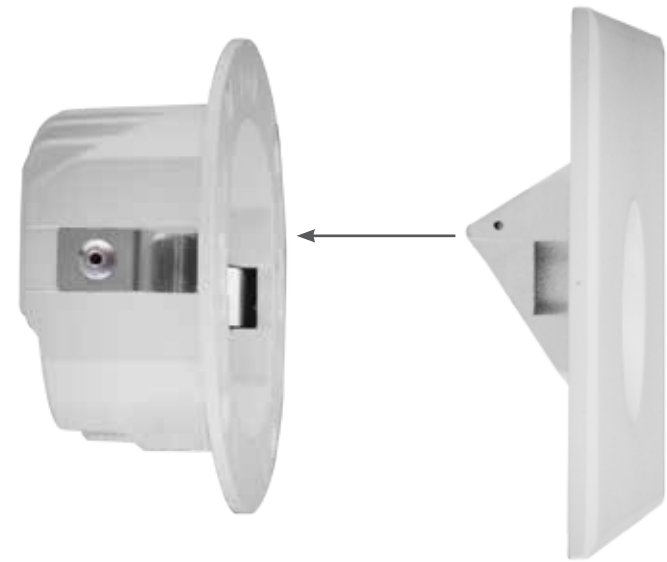

Luminaire module

Mask

Interchangeable mask



Light distribution



LADDER INDOOR

IP20 LED


- Body die-casted from high quality aluminum, powder coated finished
- Stainless screws and cable gland
- Available in monochromatic color temperature (2700K, 3000K)
- Interchangeable masks with two different types



Mask I

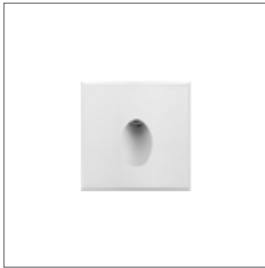

Mask II



Finish

Mask I



White



Black

Mask II



White




Black

Order Guide

L D R - I - [] - [] - 0 3 - [] - [] - N D						
Product Code	Type	Mask	Color	Wattage	CCT	Control Gear
LDR	I Indoor	1 Mask I 2 Mask II	WH White BL Black	03 3W 225lm 700mA 3V	827 2700K CRI>80 830 3000K CRI>80	ND Non-dim *Remote Driver

LADDER OUTDOOR


#Illuminate Your Pathway

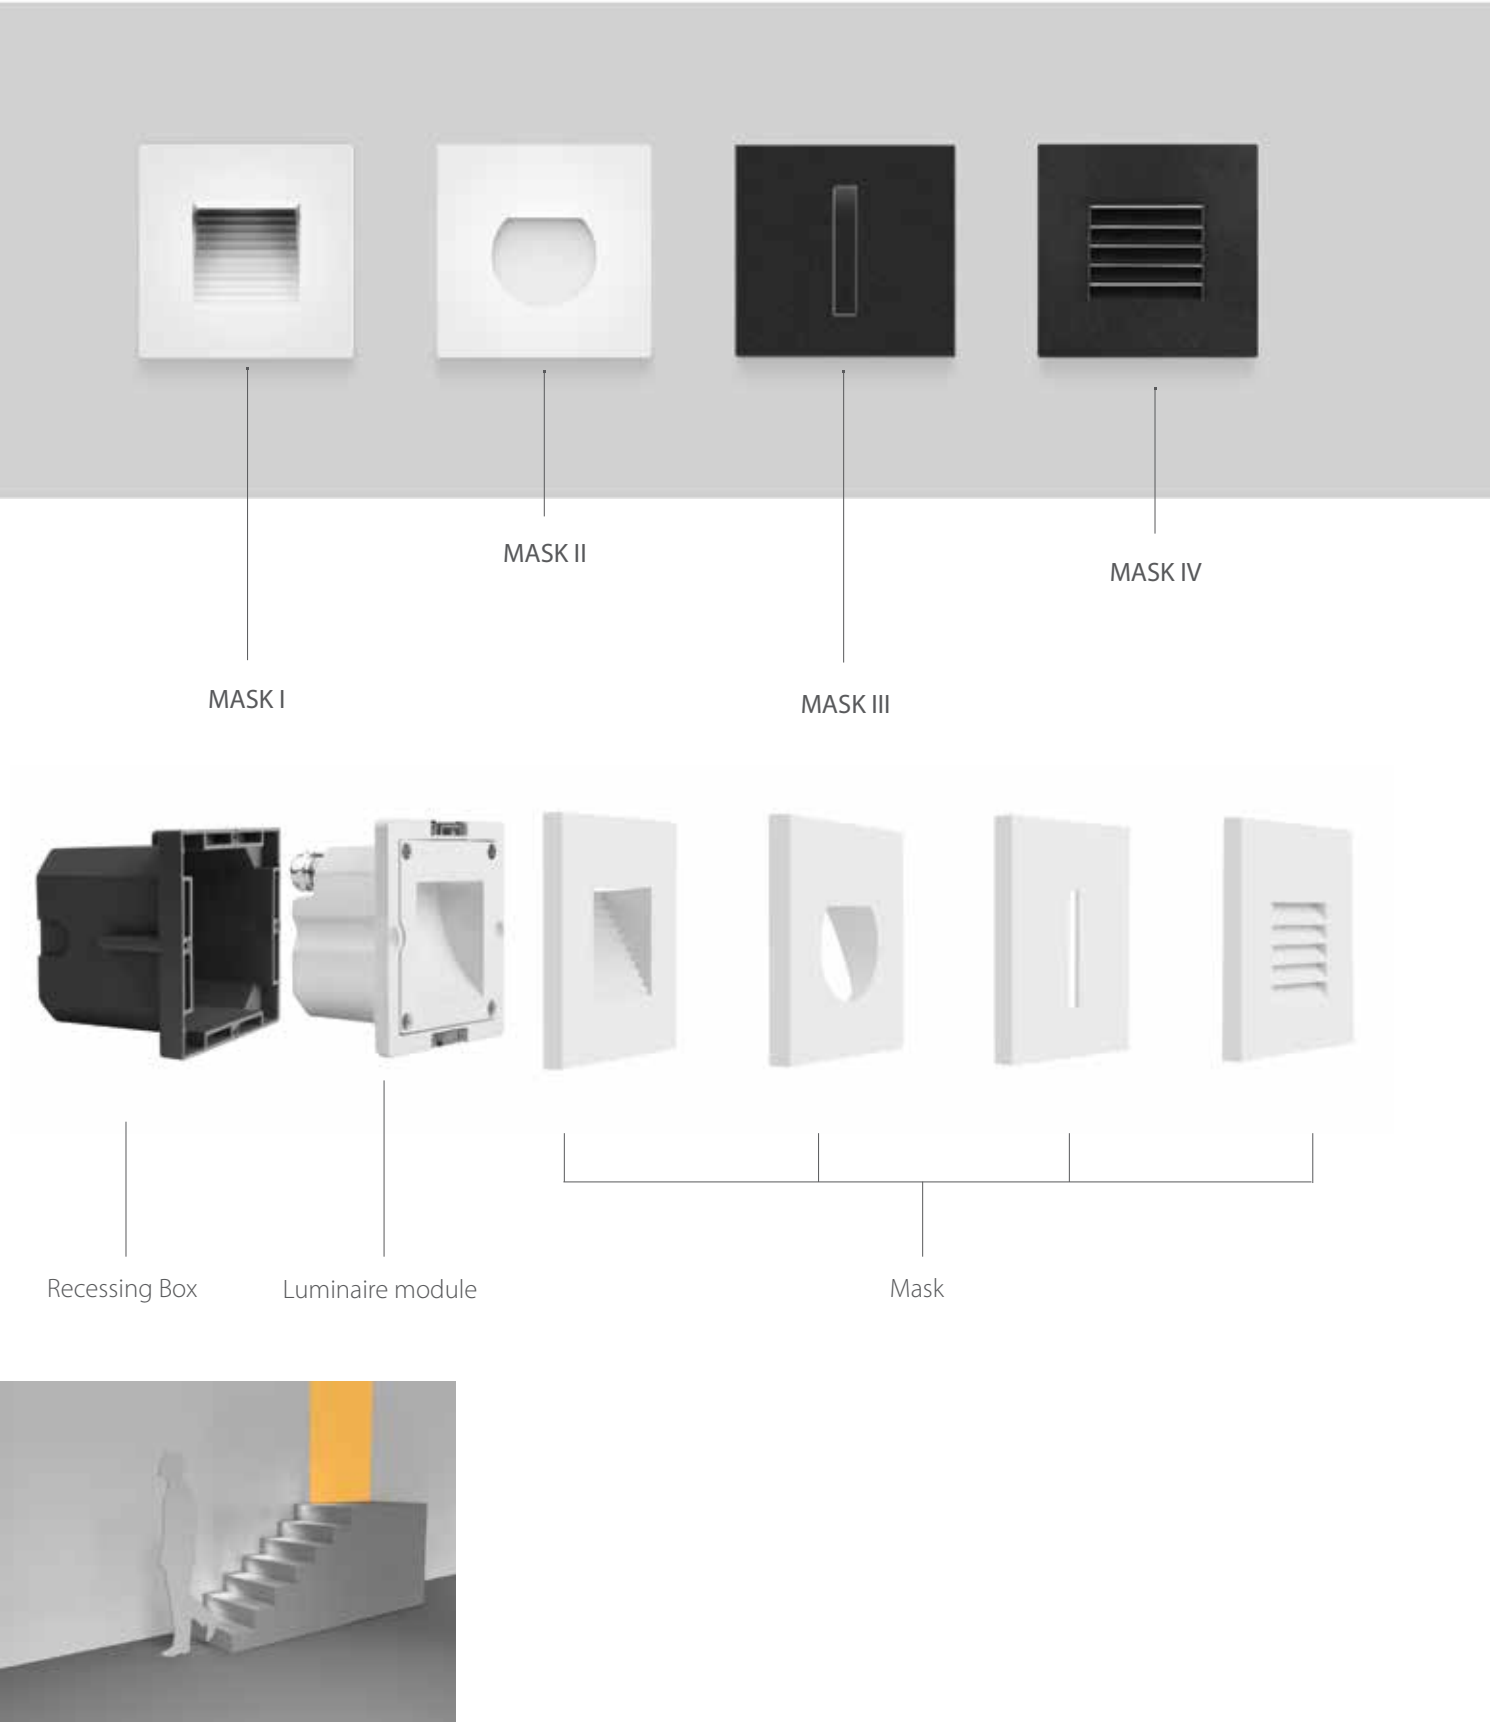


LADDER OUTDOOR

IP65 LED

- Body die-casted from high quality aluminum, powder coated finished
- Luminaire inclusive of recessing box for installation
- Stainless steel screws and cable gland
- Available in monochromatic color temperature (2700K, 3000K)
- Interchangeable masks with four different types and two different colors ,white and black
- Integrated LED driver

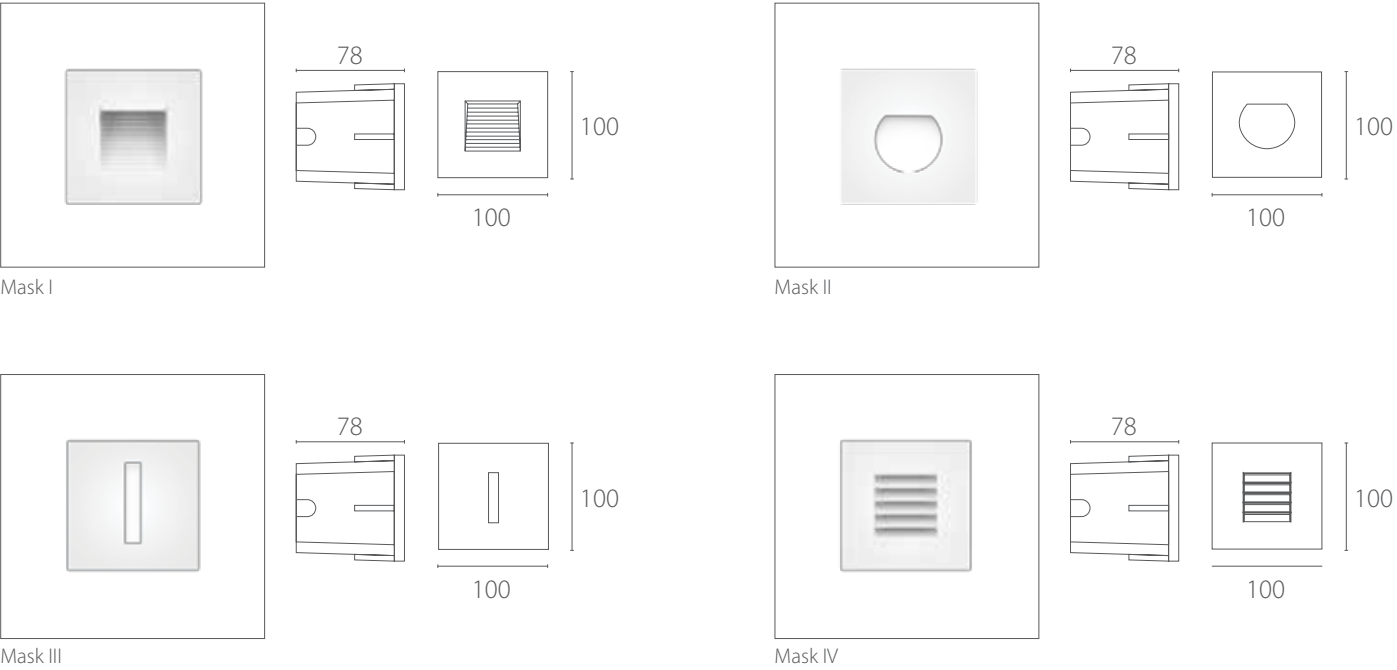

Finish

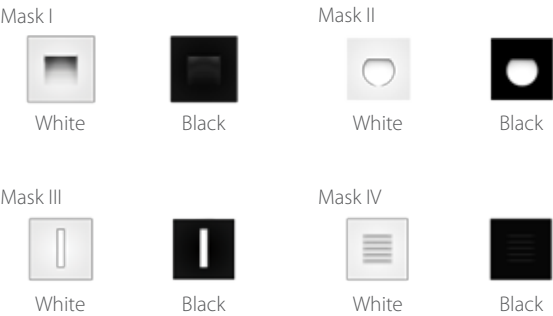


Order Guide

L D R - O - [] - [] - 0 3 - [] - [] - N D						
Product Code	Type	Mask	Color	Wattage	CCT	Control Gear
LDR	O Outdoor	1 Mask I 2 Mask II 3 Mask III 4 Mask IV	WH White BL Black	03 3W 225lm 350mA 9V	827 2700K CRI>80 830 3000K CRI>80	ND Non-dim *Integrated


QUINOZZ

#Surface Mounted Pathlight

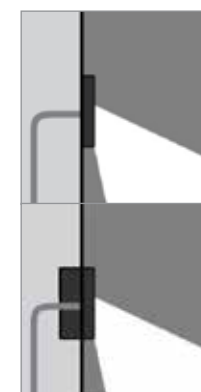

✓ Slim surface-mounted wall light eliminates the need to recess onto the wall. Save time and effort while maximizing aesthetics.

Only 36 mm thick

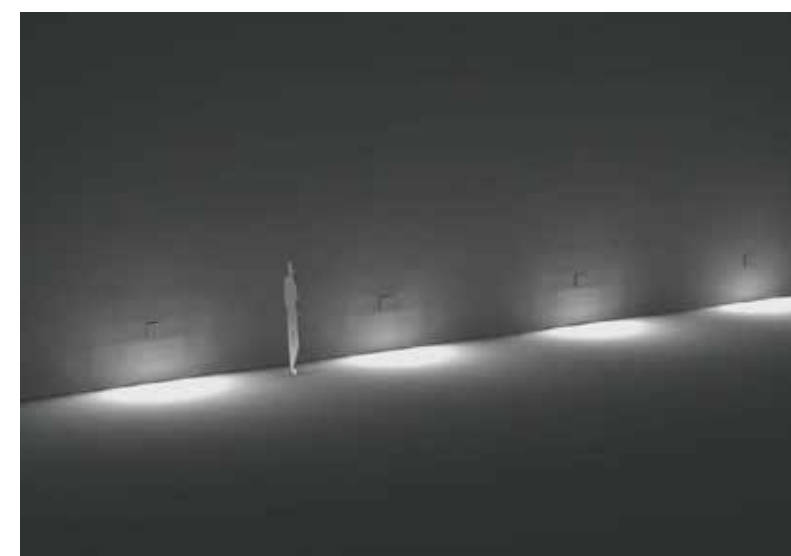

Lighting Effect




Quinozz
Grey
9W | 720 lm | 3000K

QUINOZZ

IP65 LED

- Surface-mounted LED luminaire for floorwashing application
- Die-casted aluminum body, silicone gaskets, transparent tempered sealing glass
- Slim design with only 36 mm thickness
- Integrated LED driver
- Anti-corrossion stainless steel screws

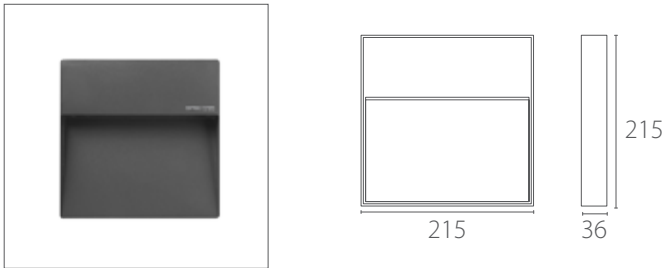

Order Guide

Q N Z - 8 - S - G R - 0 9 - 8 3 0 - N D						
Product Code	Size	Shape	Color	Wattage	CCT	Control Gear
QNZ	8 215mm	S Square	GR Grey	09 9W 720lm 700mA 12V	830 3000K CRI>80	ND Non-dim *Integrated

SPECTRA
BY LELCO

CRESCENT | Inspiration



Single Emission

Black
5W | 600 lm | 2700K

CRESCENT

#Guiding Light




CRESCENT

IP65 LED

- Single and dual emission LED bollard
- High visual comfort with minimum glare
- Extruded aluminum body and die-casted LED head unit, transparent tempered sealing glass, silicone gaskets
- Available in monochromatic color temperature (2700K, 3000K)
- Integrated LED driver
- Anti-corrosion stainless steel screws



Single Emission




Dual Emission




Wattage	Lumen	
	2700K	3000K
5W	570lm	665lm
2x5W	600lm	700lm

Light Distribution



Crescent is available with two types of lighting distribution. Single emission for 180 degrees lighting distribution and dual emission for a full 360 degrees lighting distribution.



Single Emission

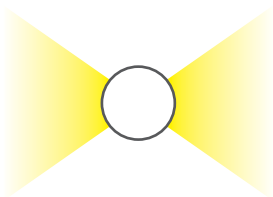

Dual Emission

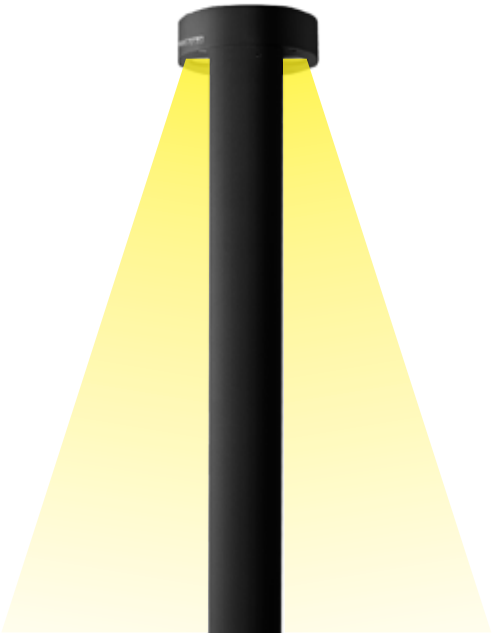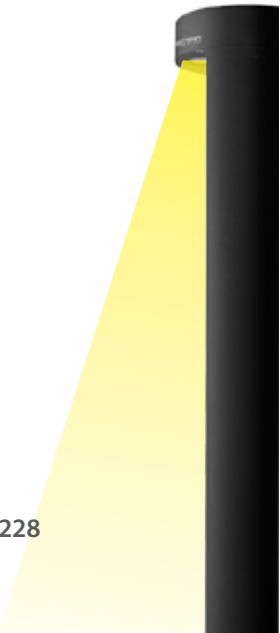

Order Guide


C R S - [] - [] - G R - [] - [] - N D							
Product Code	Type	High*	Color	Wattage	CCT	Control Gear	
CRS	1 Single Emission	020 200mm	GR Grey	05 1 x 5W 665lm 310mA 16V	827 2700K CRI>80	ND Non-dim *Integrated	
	2 Dual Emission	040 400mm					
		070 700mm		10 2 x 5W 700lm 310mA 16V	830 3000K CRI>80		
		080 800mm					

EYELIT

#Miniature Steplight



Eyelit Mini
Stainless Steel | Mask ½
3W | 80 lm | 2700K

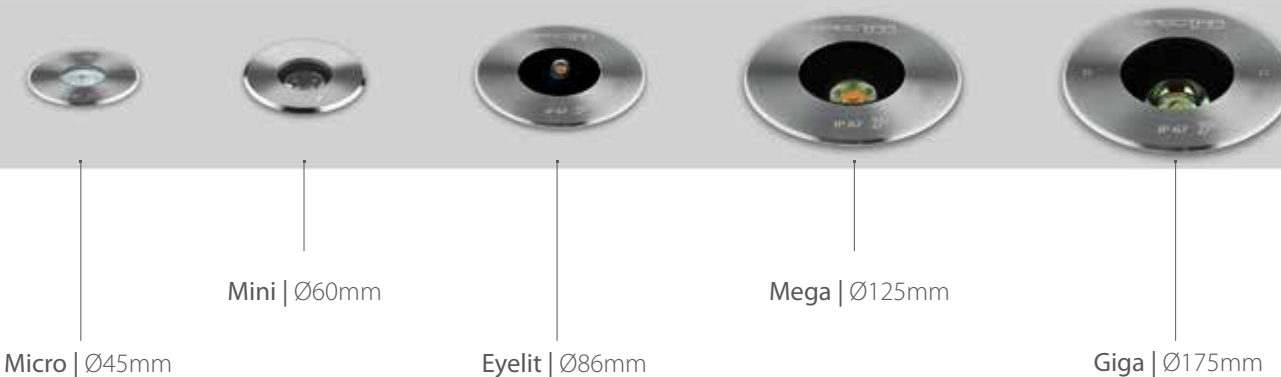

Accessories
Using mask allows for better glare control. Mask is only available for micro and mini eyelit.




Recessed Box
Allows for easy installation in recessed applications. Box is recessed prior to installation.



Light Distribution

Lighting distribution is interchangeable with a wide range of beam angle options for different types of application.

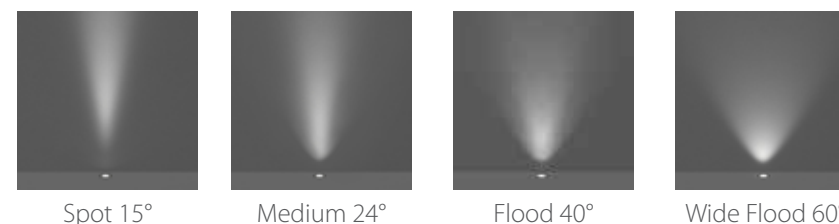

Spot 15°

Medium 24°


Flood 40°

Wide Flood 60°

EYELIT Micro



- Recessed inground LED luminaires with five different diameter
- Includes recessing box for installation
- Stainless steel frame, die-casted aluminum body, silicone gaskets, tempered sealing glass, precision polymer lens
- Runs on 24V DC Constant Voltage
- Available in monochromatic color temperature (2700K and 3000K)
- Static load resistance 1000 kg (walk-over)

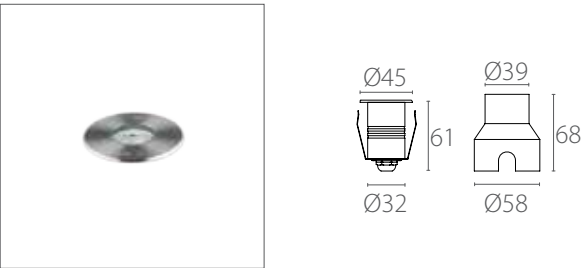

Accessories



Order Guide


E Y E - 0 2 - - - 0 1 - - -									
Product Code	Size	Type	Accessories	Color	Wattage	Beam Angle	CCT	Control Gear*	
EYE	02 Ø45mm	A Asymmetric	00 None	SS Stainless Steel	01 1.5W 80lm (Source: 180lm) 24V	SP 15°	827 2700K CRI>80	24V Constant Voltage External driver	
		S Symmetric	SE Mask 1/2	WH White		MD 24°			
			LS Mask 2/3	BL Black		FL 40°			
						WF 60°			

*To be ordered separately

EYELIT Mini



- Recessed inground LED luminaires with five different diameter
- Includes recessing box for installation
- Stainless steel frame, die-casted aluminum body, silicone gaskets, tempered sealing glass, precision polymer lens
- Runs on 24V DC Constant Voltage
- Available in monochromatic color temperature (2700K and 3000K)
- Static load resistance 1000 kg (walk-over)

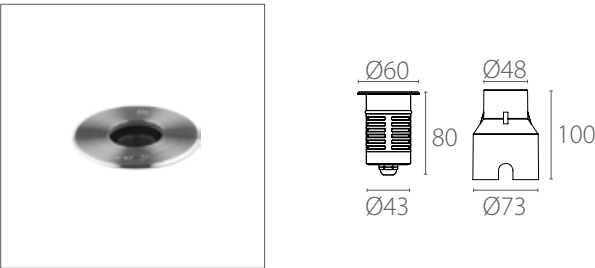

Accessories



Order Guide


E Y E - 0 3 - - - 0 3 - - -									
Product Code	Size	Type	Accessories	Color	Wattage	Beam Angle	CCT	Control Gear*	
EYE	03 Ø60mm	A Asymmetric	00 None	SS Stainless Steel	03 3W 130lm (Source: 360 lm) 24V	SP 15°	827 2700K CRI>80	24V Constant Voltage External driver	
		S Symmetric	SE Mask 1/2	WH White		MD 24°			
			LS Mask 2/3	BL Black					
							830 3000K CRI>80		

*To be ordered separately

EYELIT



- Recessed inground LED luminaires with five different diameter
- Includes recessing box for installation
- Stainless steel frame, die-casted aluminum body, silicone gaskets, tempered sealing glass, precision polymer lens
- IP67 ingress protection rating, Runs on 24V DC Constant Voltage
- Static load resistance 1000 kg (walk-over)

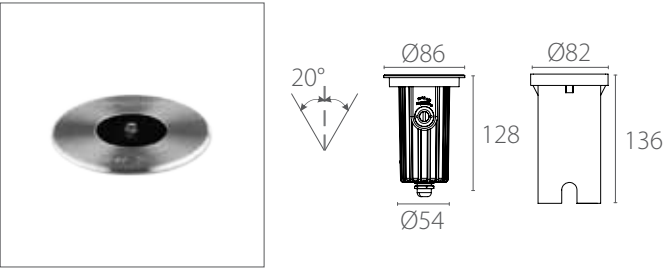

Order Guide


E Y E - 0 4 - - 0 0 - - 0 6 - - -									
Product Code	Size	Type	Accessories	Color	Wattage	Beam Angle	CCT	Control Gear*	
EYE	04 Ø86mm	A Asymmetric	00 None	SS Stainless Steel	06 6W 460 lm (Source: 720lm) 24V	SP 15°	827 2700K CRI>80	24V Constant Voltage External driver	
		S Symmetric		WH White		MD 24°	830 3000K CRI>80		
				BL Black		FL 40°			

*To be ordered separately

EYELIT Mega



- Recessed inground LED luminaires with five different diameter
- Includes recessing box for installation
- Stainless steel frame, die-casted aluminum body, silicone gaskets, tempered sealing glass, precision polymer lens
- IP67 ingress protection rating, Runs on 24V DC Constant Voltage
- Static load resistance 1000 kg (walk-over)

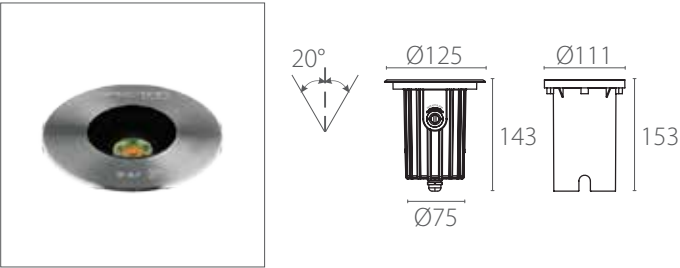

Accessories



Order Guide

E Y E - 0 5 - - - - 1 1 - - -									
Product Code	Size	Type	Accessories	Color	Wattage	Beam Angle	CCT	Control Gear*	
EYE	05 Ø125mm	A Asymmetric	00 None HC Honeycomb Louvre	SS Stainless Steel	11 11W 740 lm (Source: 1320lm) 24V	SP 15°	827 2700K CRI>80	24V Constant Voltage External driver	
		S Symmetric		WH White		MD 24°	830 3000K CRI>80		
				BL Black		FL 36°			


*To be ordered separately

EYELIT Giga

IP67

LED

- Recessed inground LED luminaires with five different diameter
- Includes recessing box for installation
- Stainless steel frame, die-casted aluminum body, silicone gaskets, tempered sealing glass, precision polymer lens
- IP67 ingress protection rating, Runs on 24V DC Constant Voltage
- Static load resistance 1000 kg (walk-over)

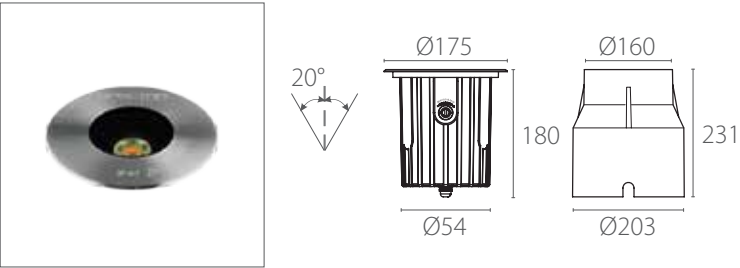

Accessories



Honeycomb Louvre

Order Guide

E

Y

E

-

0

6

-

-

-

-

1

5

-

-

Product Code	Size	Type	Accessories	Color	Wattage	Beam Angle	CCT	Control Gear*
EYE	06 Ø175mm	A Asymmetric S Symmetric	00 None HC Honeycomb Louvre	SS Stainless Steel WH White BL Black	15 15W 1000 lm (Source: 1800lm) 24V	SP 15° MD 24° FL 36°	827 2700K CRI>80 830 3000K CRI>80	24V Constant Voltage External driver

LELCO BUILDING (Headquarters)

Jakarta
Jl. Tomang Raya No. 14
Jakarta 11430
Indonesia
Telp. +62(21) 560 5678
Fax. +62(21) 567 3402
E-mail. marketing@lelco.co.id
www.lelco.co.id
www.lelcogroup.com



Surabaya
Komp. Darmo Park 1 Blok 2B No 10
Jl. Mayjend Sungkono
Surabaya 60256
Indonesia
Telp. +62(31) 563 0554
E-mail. surabaya@lelco.co.id

MANUFACTURING

Jl. Industri Raya IV Blok AC No. 08
Jatake, Tangerang 15710
Indonesia
Telp. +62(21) 590 2022
Fax. +62(21) 590 2025

www.spectrabylelco.com



*To be ordered separately

