

LED SPOTLIGHT

CATALOG 2024



+86-15888067484



Sales@kingornan.com



www.kingornan.com

ALIEN SERIES

Frameless large curved surface light cup design, smoothly embedded in the ceiling; light source deeply concealed for better anti-glare effect, where you see the light, not the lamp; suitable for various types of decoration needs in residential, villa, and more, achieving a perfect balance of optical and aesthetic effects.





PROFESSIONAL GRADE OPTICAL LENSES

Precise light control, newly developed TIR optical lens new light guide structure. Increase the efficiency of light refraction equal distribution of light, more uniform light, light spotpure and free of stray light, bringing people a comfortable visual experience.





ALIEN SERIES


DOWNLIGHT




LD321 round hole bevel



POWER: 7W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 25 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

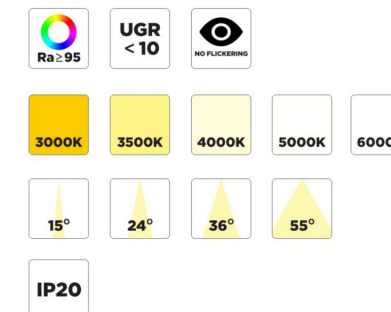

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES





OPTICAL FILTER



LIGHT DISTRIBUTION CURVE

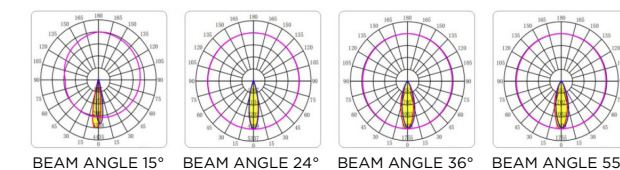

KO-331N Speaker
Curved Surface



IP20


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER




BEAM ANGLE 15°



BEAM ANGLE 24°





BEAM ANGLE 36°



BEAM ANGLE 55°

POWER: 7W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 25 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-323N right
angle bevel split



IP20


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER




BEAM ANGLE 15°



BEAM ANGLE 24°





BEAM ANGLE 36°



BEAM ANGLE 55°

POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 45 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-332N Speaker
Curved Surface




COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER




BEAM ANGLE 15°



BEAM ANGLE 24°





BEAM ANGLE 36°



BEAM ANGLE 55°

POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 35 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-322N Round
Hole Bevel




COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER




BEAM ANGLE 15°



BEAM ANGLE 24°






BEAM ANGLE 36°



BEAM ANGLE 55°

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 35 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-332N Speaker
Curved Surface



POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Zhihongtong 35 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER




BEAM ANGLE 15°



BEAM ANGLE 24°



BEAM ANGLE 36°



BEAM ANGLE 55°







ALIEN SERIES

DOWNLIGHT




YD-321N Slope/ Curved Surface

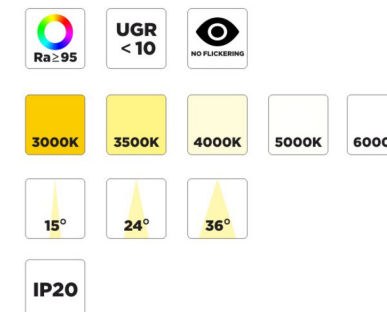



COLOR OF ANTI-GLARE CUP



PRODUCT COLOR



OPTICAL FILTER

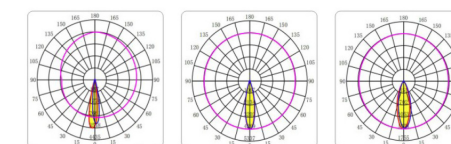

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 7

CUTOUT: 55mm

CRI: >95




MATERIAL: Die-cast aluminum

CHIP: Light source: Zhihongtong 25 COB

UGR: Anti-glare index>10

VOLTAGE: AC85-224V

YD-322N Slope/
Curved Surface

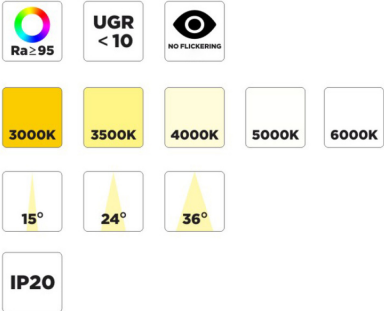


COLOR OF ANTI-GLARE CUP



PRODUCT COLOR






OPTICAL FILTER

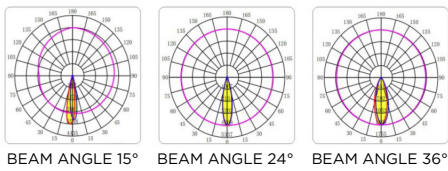

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: Zhihongtong 35 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

YD-323N Slope/
Curved Surface

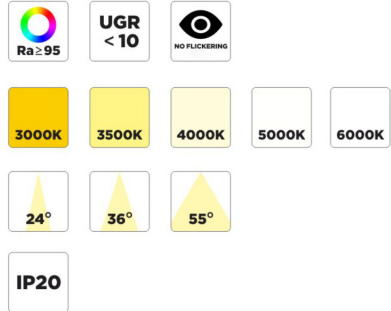



COLOR OF ANTI-GLARE CUP



PRODUCT COLOR



OPTICAL FILTER

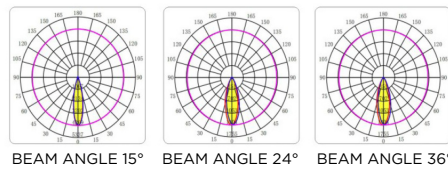

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: Zhihongtong 45 COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




SHADOW

Light and Shadow 5S Series

Familiarized design, diversified accessories to meet different lighting needs;
full range of lighting services. Suitable for villa flat, commercial restaurant,
hotel, exhibition hall and other applications.




Narrow round panel

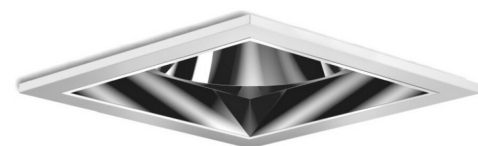

Narrow square panel



Borderless round panel

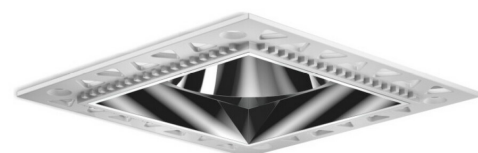

Borderless square panel




Ultimate black hole




Crystal Stripes




Exquisite gun black

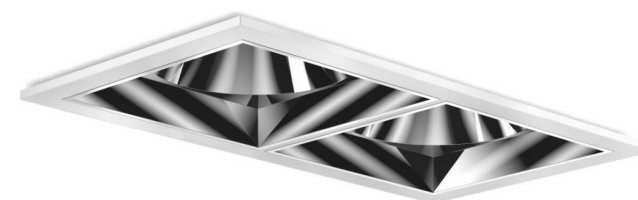


Double-ended narrow edge square panel

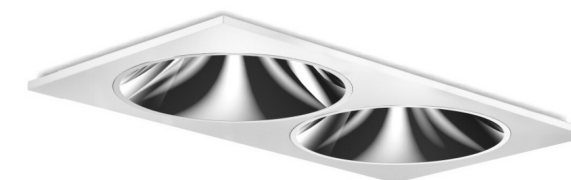

Double ended square edged panel

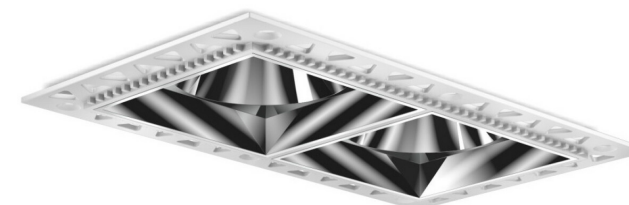

Double-ended edgeless square panel

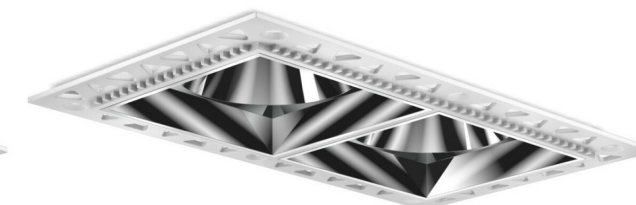

Double-ended edgeless square panel

SERIALIZED DESIGN

Family-oriented design accessory diversification, to meet different lighting needs: a full range of lighting service, suitable for villas commercial restaurants hoteKO exhibition hallKO and other application areas service, suitable for villa float commercial restaurant, hotel, exhibition hall and other applications

CONCEALED PULL TABS

The lamp body is equipped with a special pull ring gently pull easy to remove The light body is equipped with a special pull ring as standard, easy to take out the lamps and adjust the pendulum head, without hurting the ceiling and easier to maintain



COMPOUND CONVEX LENS

Precise light control, light source deep hidden design, effectively prevent dazzling LightThrough the lens in the anti-glare cup filtered downward irradiation. The light from the lamp body is even and soft, presenting a perfect light spot, which can achieve a high standard of illumination Uniform and soft, presenting a perfect spot. not only can achieve the high standard illuminationeffect, and at the same time, the light feeling comfort. reduce eve glare stimulation




SPHERICAL ANTI-GLARE

Deeply hidden light source design, spherical hood structure. double anti-glare, rounded light spot. large shading angle, high anti-glare index, giving people comfortable visual enjoyment



ANGLE ADJUSTMENT


Adistable 30° in the vertical direction, 350° in the horizontal direction, large angle rotation, precise lighting suitable for professional lighting debugging clear and audible rhythm, tum the card shaft, and you can hear the sense of high-end.

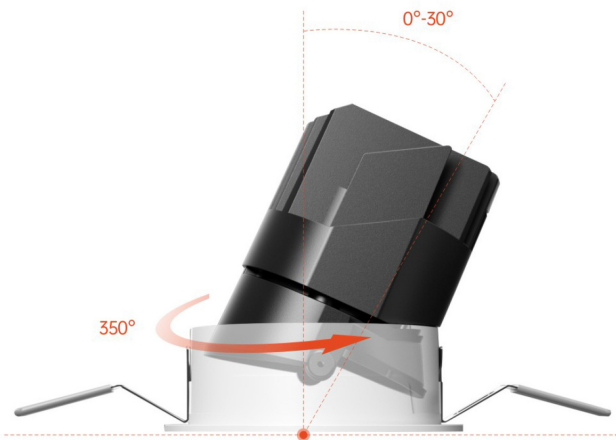



SHADOW SERIES

Spotlight


Light and Shadow 5S Series Wall Washer

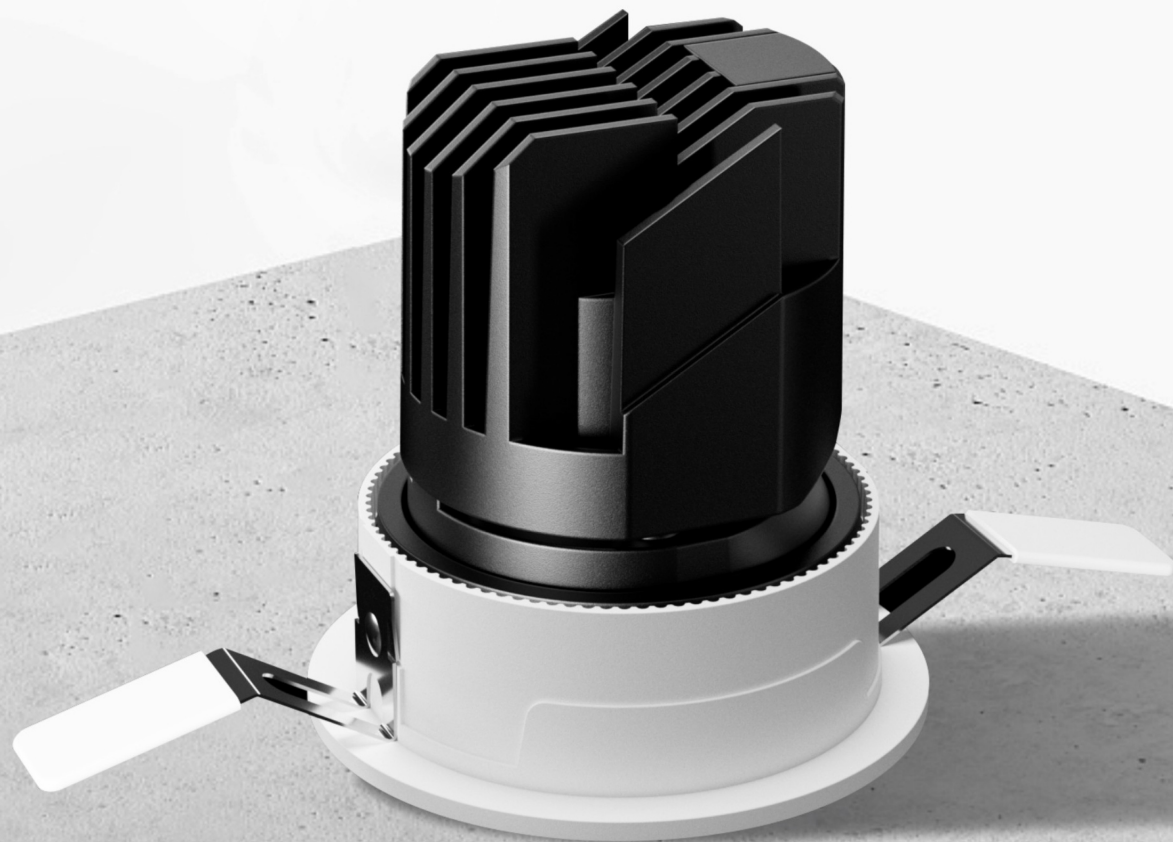

KO-501DA



POWER: 7-10W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

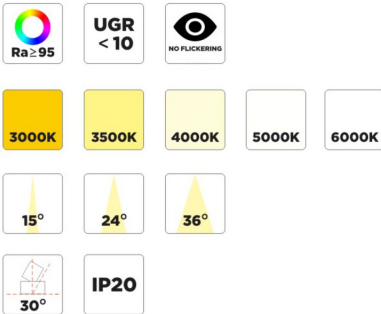



COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES



OPTICAL FILTER

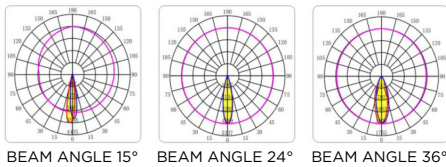

KO-502DA

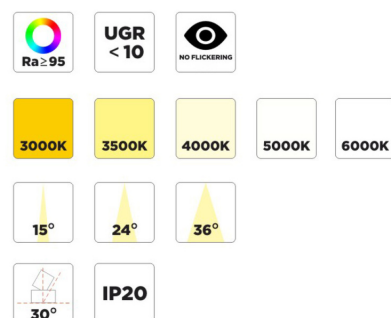



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES





OPTICAL FILTER

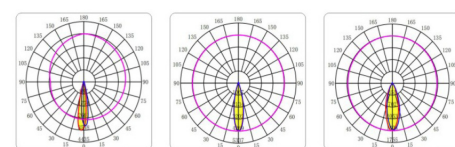


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-503DA




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES





OPTICAL FILTER




BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 24W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-501DB



POWER: 7W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

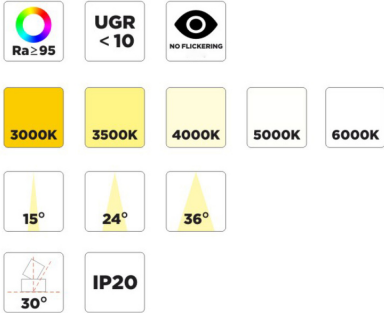


COLOR OF ANTI-GLARE CUP





ANTI-GLARE ACCESSORIES




OPTICAL FILTER

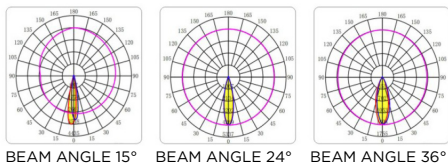

KO-502DB



POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

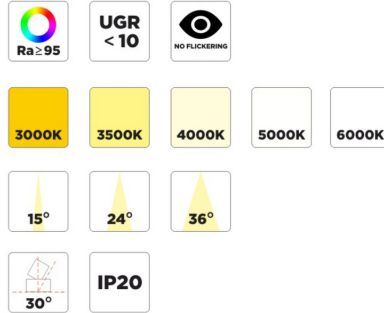


COLOR OF ANTI-GLARE CUP





ANTI-GLARE ACCESSORIES




OPTICAL FILTER

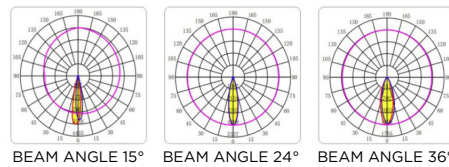


KO-501DS





COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES

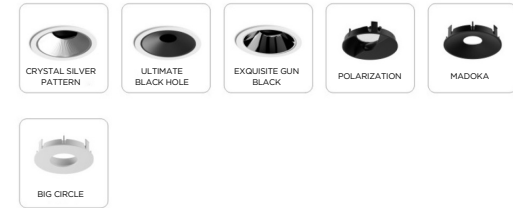



OPTICAL FILTER

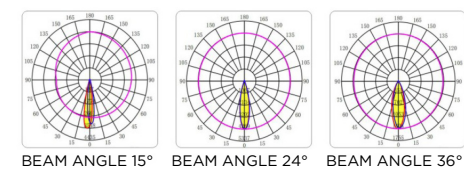


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 7W
CUTOUT: 55x55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-502DS





COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

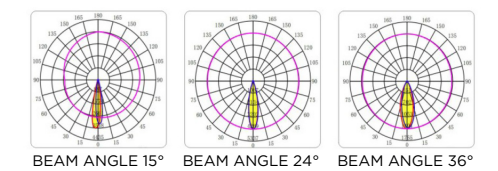


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 12W
CUTOUT: 75x75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


KO-501DR

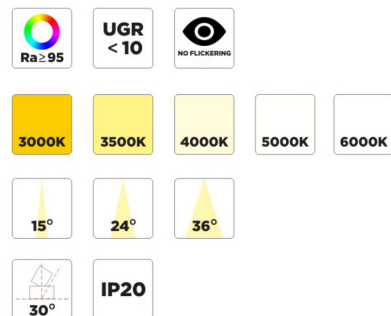



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES

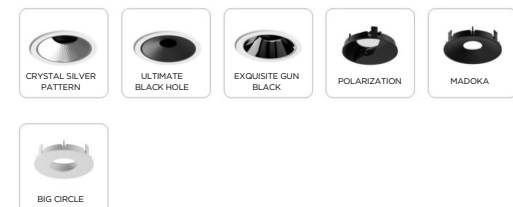




OPTICAL FILTER

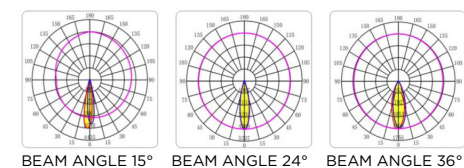


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 7-10W
CUTOUT: 55x55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-502DR

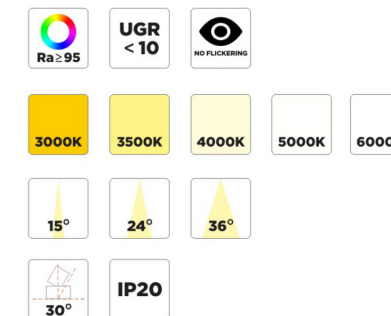


COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES





OPTICAL FILTER

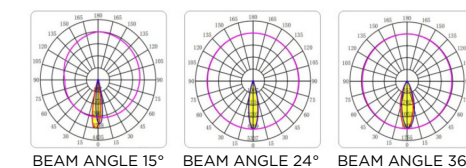


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 12W
CUTOUT: 75x75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-501DH



POWER: 2x7W
CUTOUT: 138x55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

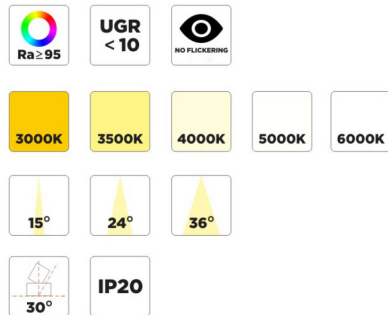



COLOR OF ANTI-GLARE CUP





ANTI-GLARE ACCESSORIES




OPTICAL FILTER

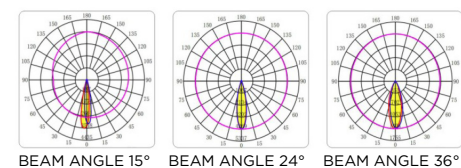


KO-502DH



POWER: 2x12W
CUTOUT: 145x75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

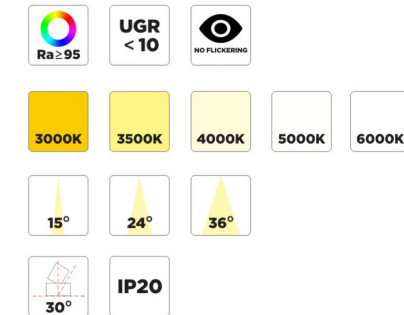



COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES




OPTICAL FILTER

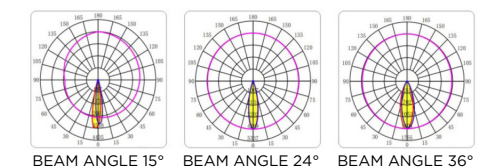

KO-501DF

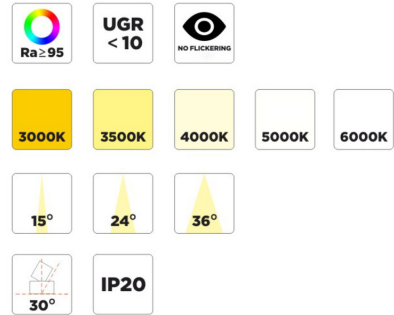



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

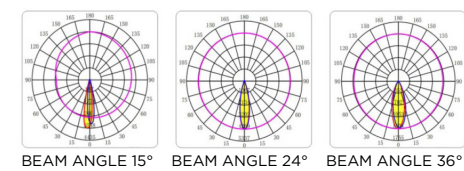


POWER: 2x7W
CUTOUT: 138x55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-502DF

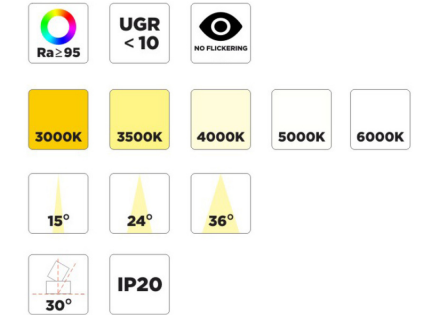



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES



OPTICAL FILTER

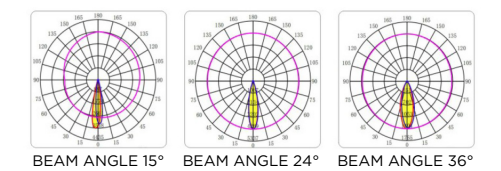


POWER: 2x12W
CUTOUT: 145x75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

XY SERIES

Small lamp body high power fusion of low height of the new design concept, perfectly adapted to a variety of ceiling height, not limited by the ceiling height: Unique appearance design, new concept, modular design. more in line with modern light needs: Diversification of surface ring to meet different installation environment, wider scope of application.



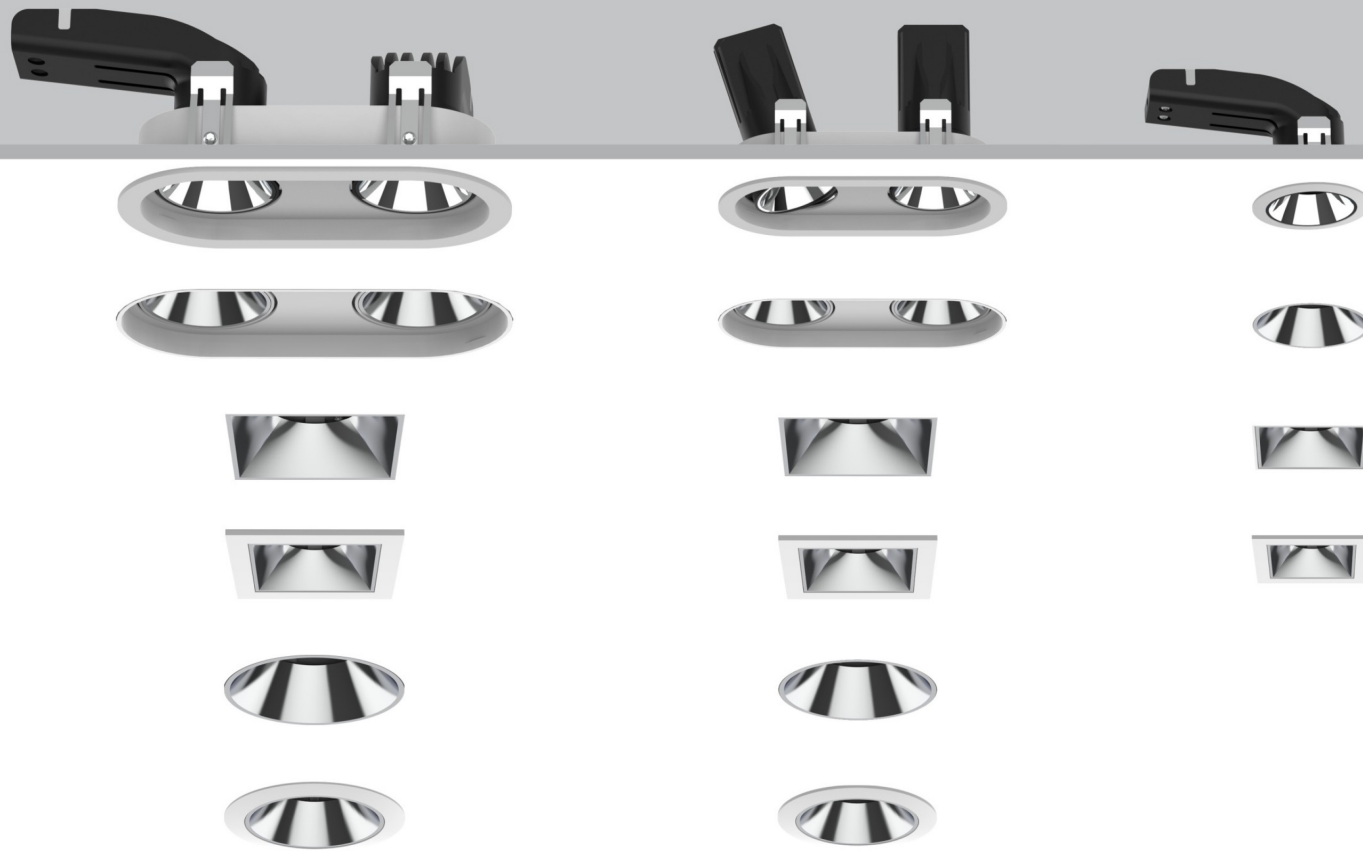


SERIALIZED DESIGN

Direct Illumination and adjustable wall wash two modules to meet the needs of multiple lighting: SlimSlim lamp body is more soft and fashionable aesthetic, catering to various types of ceiling highThe slim body is more soft and fashionable, catering to the high ceiling decorations of various house types



CONCEALED PULL TABS

The lamp body comes with a special pull ring which can be pulled gently without damaging the ceiling, easily taking out and adjusting the swing head.

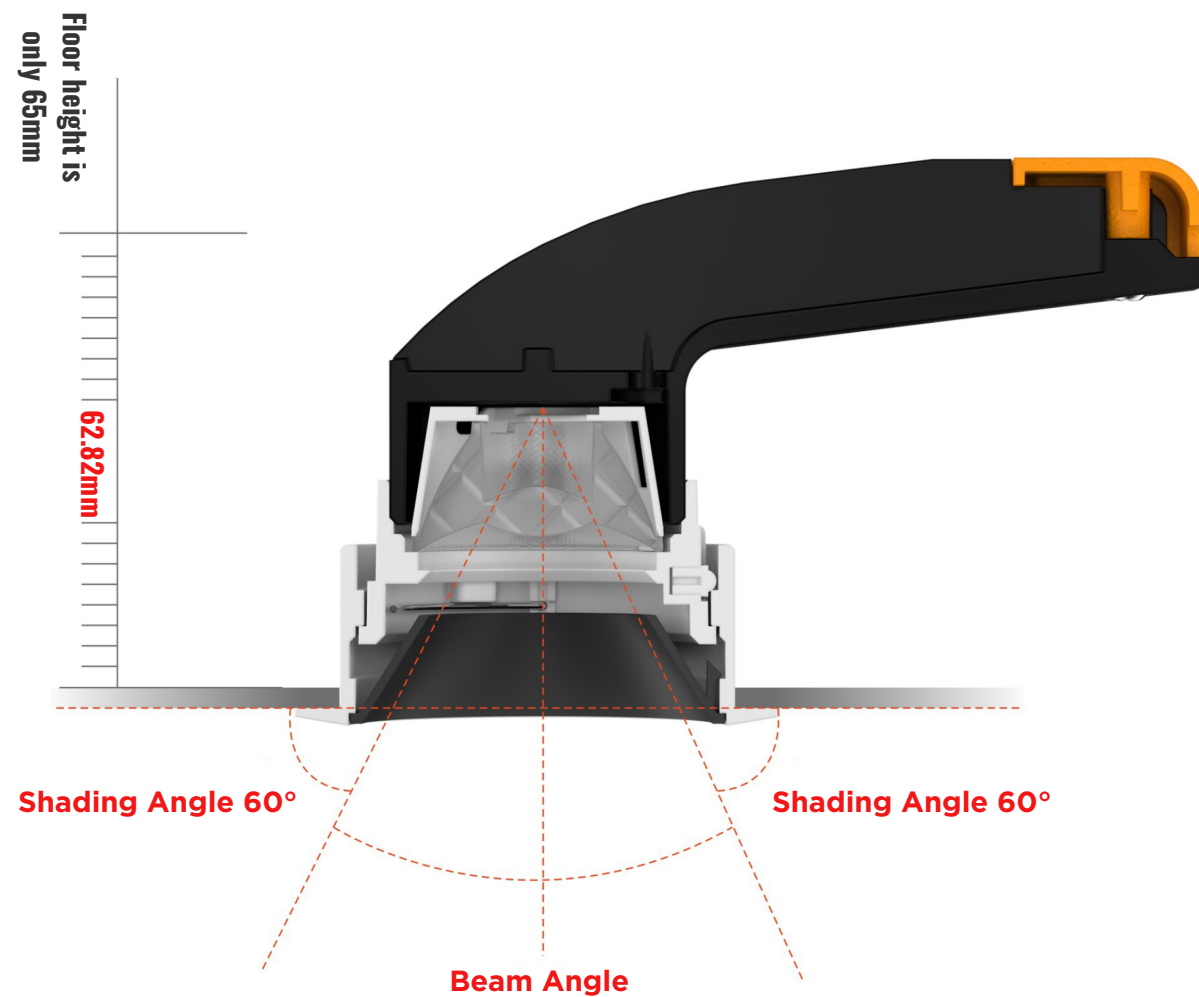


DEEP ANTI-GLARE

Light source deep hidden design precise light control, fiber shadow series of small aperture shading angle up to 60 °The light is effectively prevented from dazzling and the light is finally refracted to the anti-glare cup through the lens and reflector. After filtering the light comes out evenly and softly presenting a perfect light spot, which can achieve a high standard of visuallight comfort, reduce the eyes from glare damage.







XIANYING SERIES


Spotlight

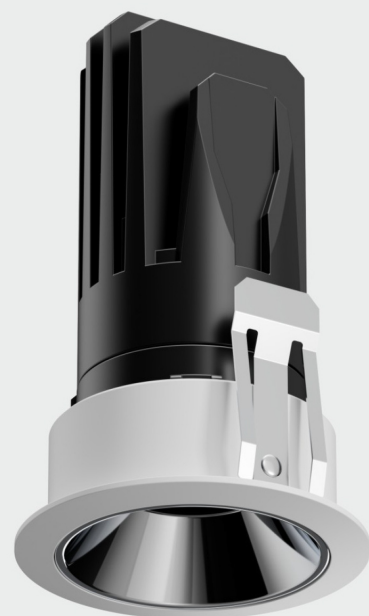

KO-211NA Round Embedded/Right Angle

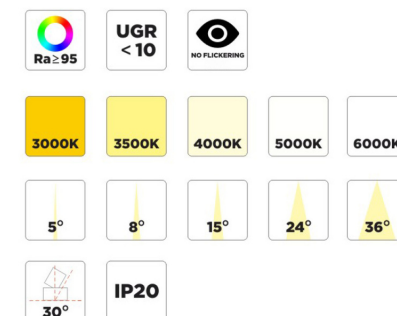



COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER

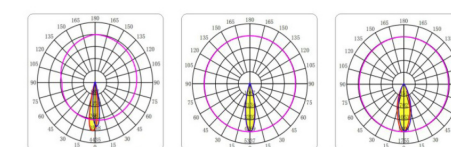




BEAM ANGLE 5° BEAM ANGLE 8° BEAM ANGLE 15°



BEAM ANGLE 24° BEAM ANGLE 24°

POWER: 12W
CUTOUT: 45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-211NB Round
Frameless/Right Angle

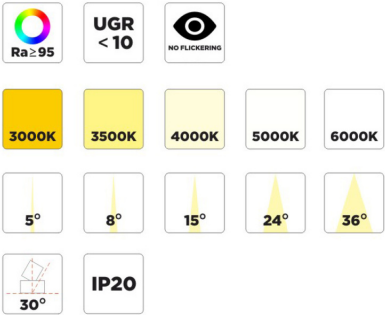

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 12W
CUTOUT: 45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

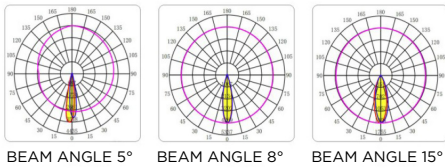

KO-211NR Square
Embedded/Right Angle

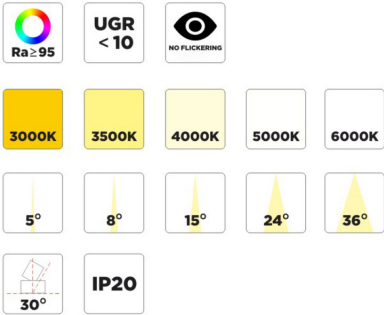

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 12W
CUTOUT: 45x45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

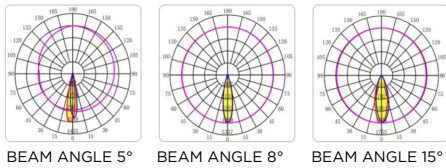

KO-211NS Square
Frameless/Right Angle

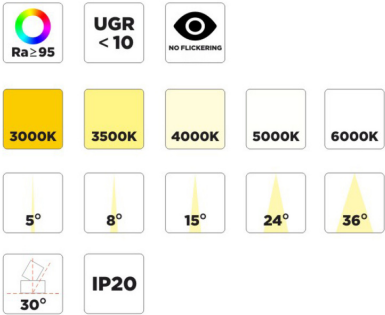

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 12W
CUTOUT: 45x45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

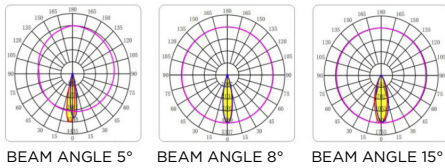

KO-212DF Peach Round
Embedded/Universal
Head

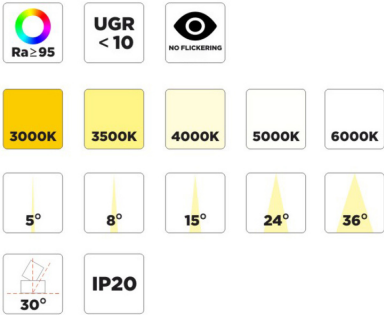

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 2x12W
CUTOUT: 60x130mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

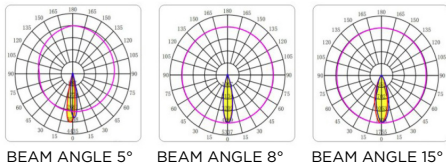

KO-212DH Elliptical
Frameless/Universal Head

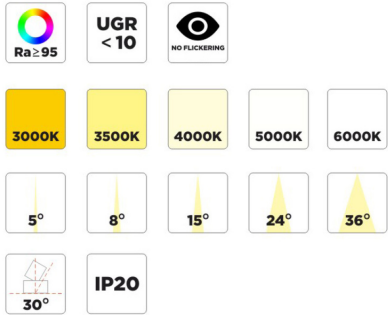

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 2x12W
CUTOUT: 60x130mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

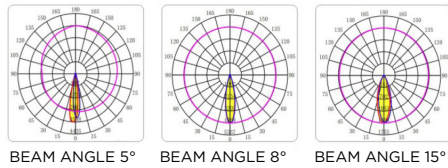

KO-211DA Round
Embedded/Adjustable

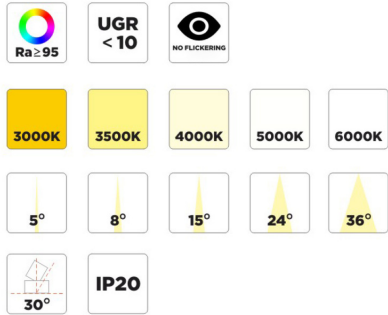

COLOR OF ANTI-GLARE CUP






ANTI-GLARE ACCESSORIES






POWER: 12W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

OPTICAL FILTER

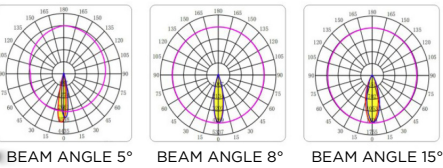

KO-211DB Round
Frameless/Adjustable

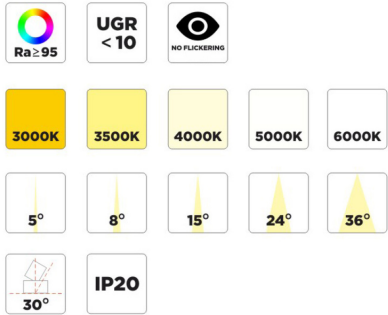




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

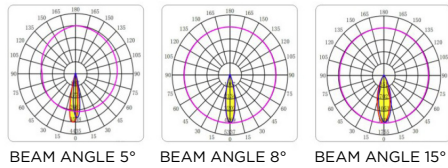

POWER: 12W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-201NA Round
Embedded/Right Angle

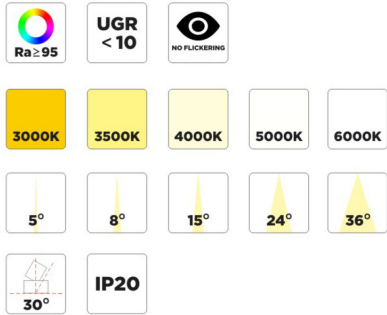




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

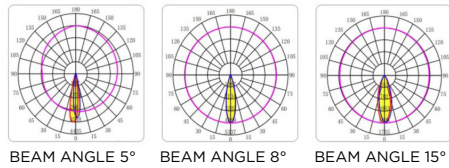

POWER: 8W
CUTOUT: 45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-201NB Round
Frameless/Right Angle

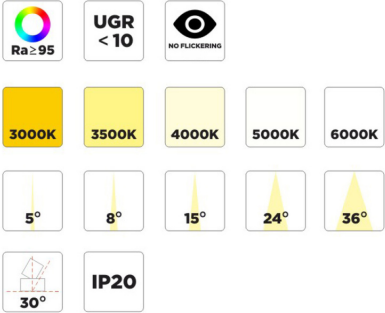




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

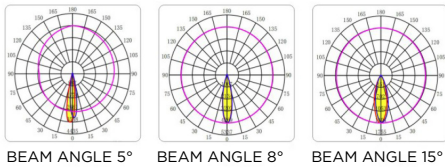

POWER: 8W
CUTOUT: 45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-202NR Square
Embedded/Right Angle

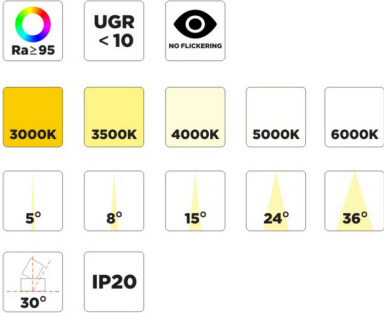




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

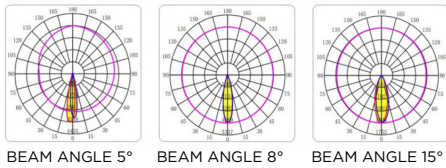

POWER: 8W
CUTOUT: 45x45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-202NS Square
Frameless/Right Angle

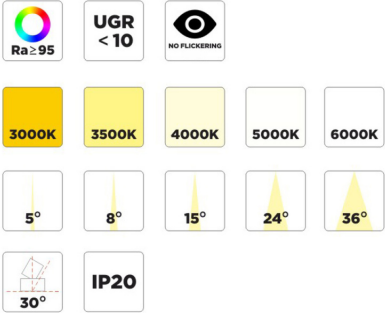




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

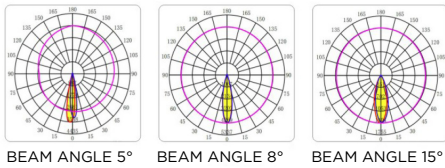

POWER: 8W
CUTOUT: 45x45mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-202DF Elliptical
Embedded/Universal Head

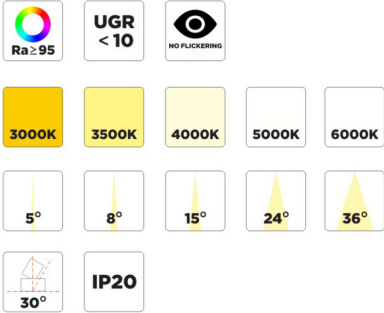




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

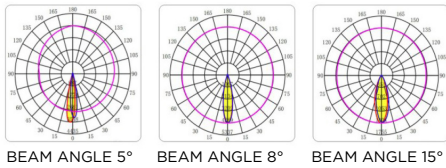

POWER: 2x8W
CUTOUT: 60x130mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-202DH Liuyuan
Frameless/Universal Head

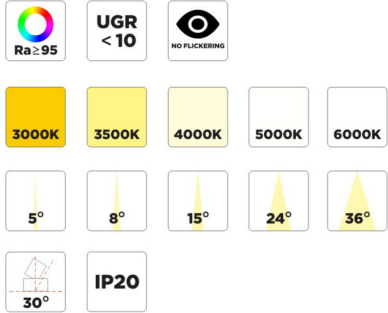




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

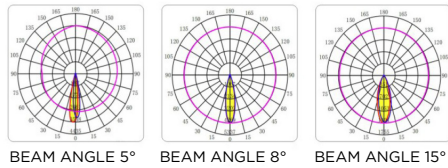

POWER: 2x8W
CUTOUT: 60x130mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-201DA Round
Embedded/Adjustable Angle

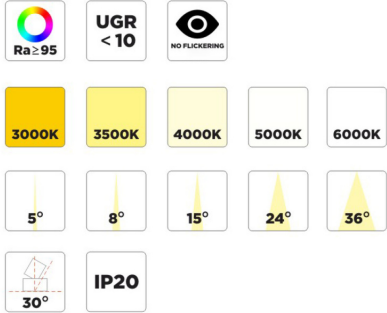




COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

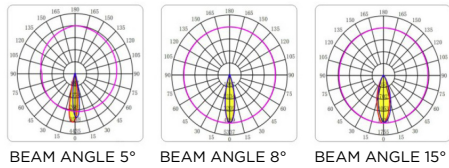

POWER: 8W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-202DH Round
Frameless/Adjustable Angle

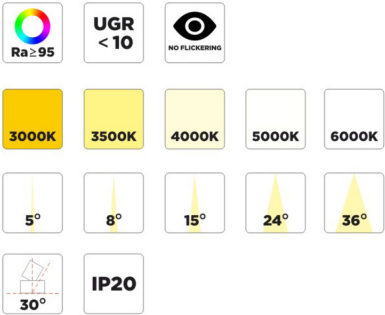



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES



OPTICAL FILTER

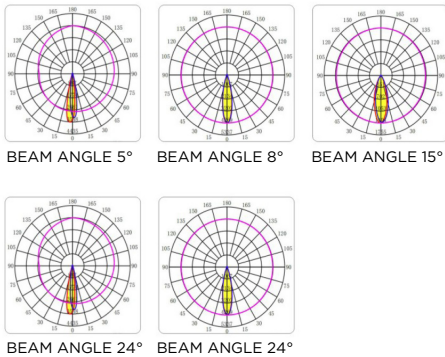


POWER: 8W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



FLC SERIES

Family-oriented design, accessory diversification, to meet different lighting needs: a full range of lighting service, suitable for villas, commercial restaurants, hotels, exhibition halls and other application areas. service, suitable for villa floor, commercial restaurant, hotel, exhibition hall and other applications.


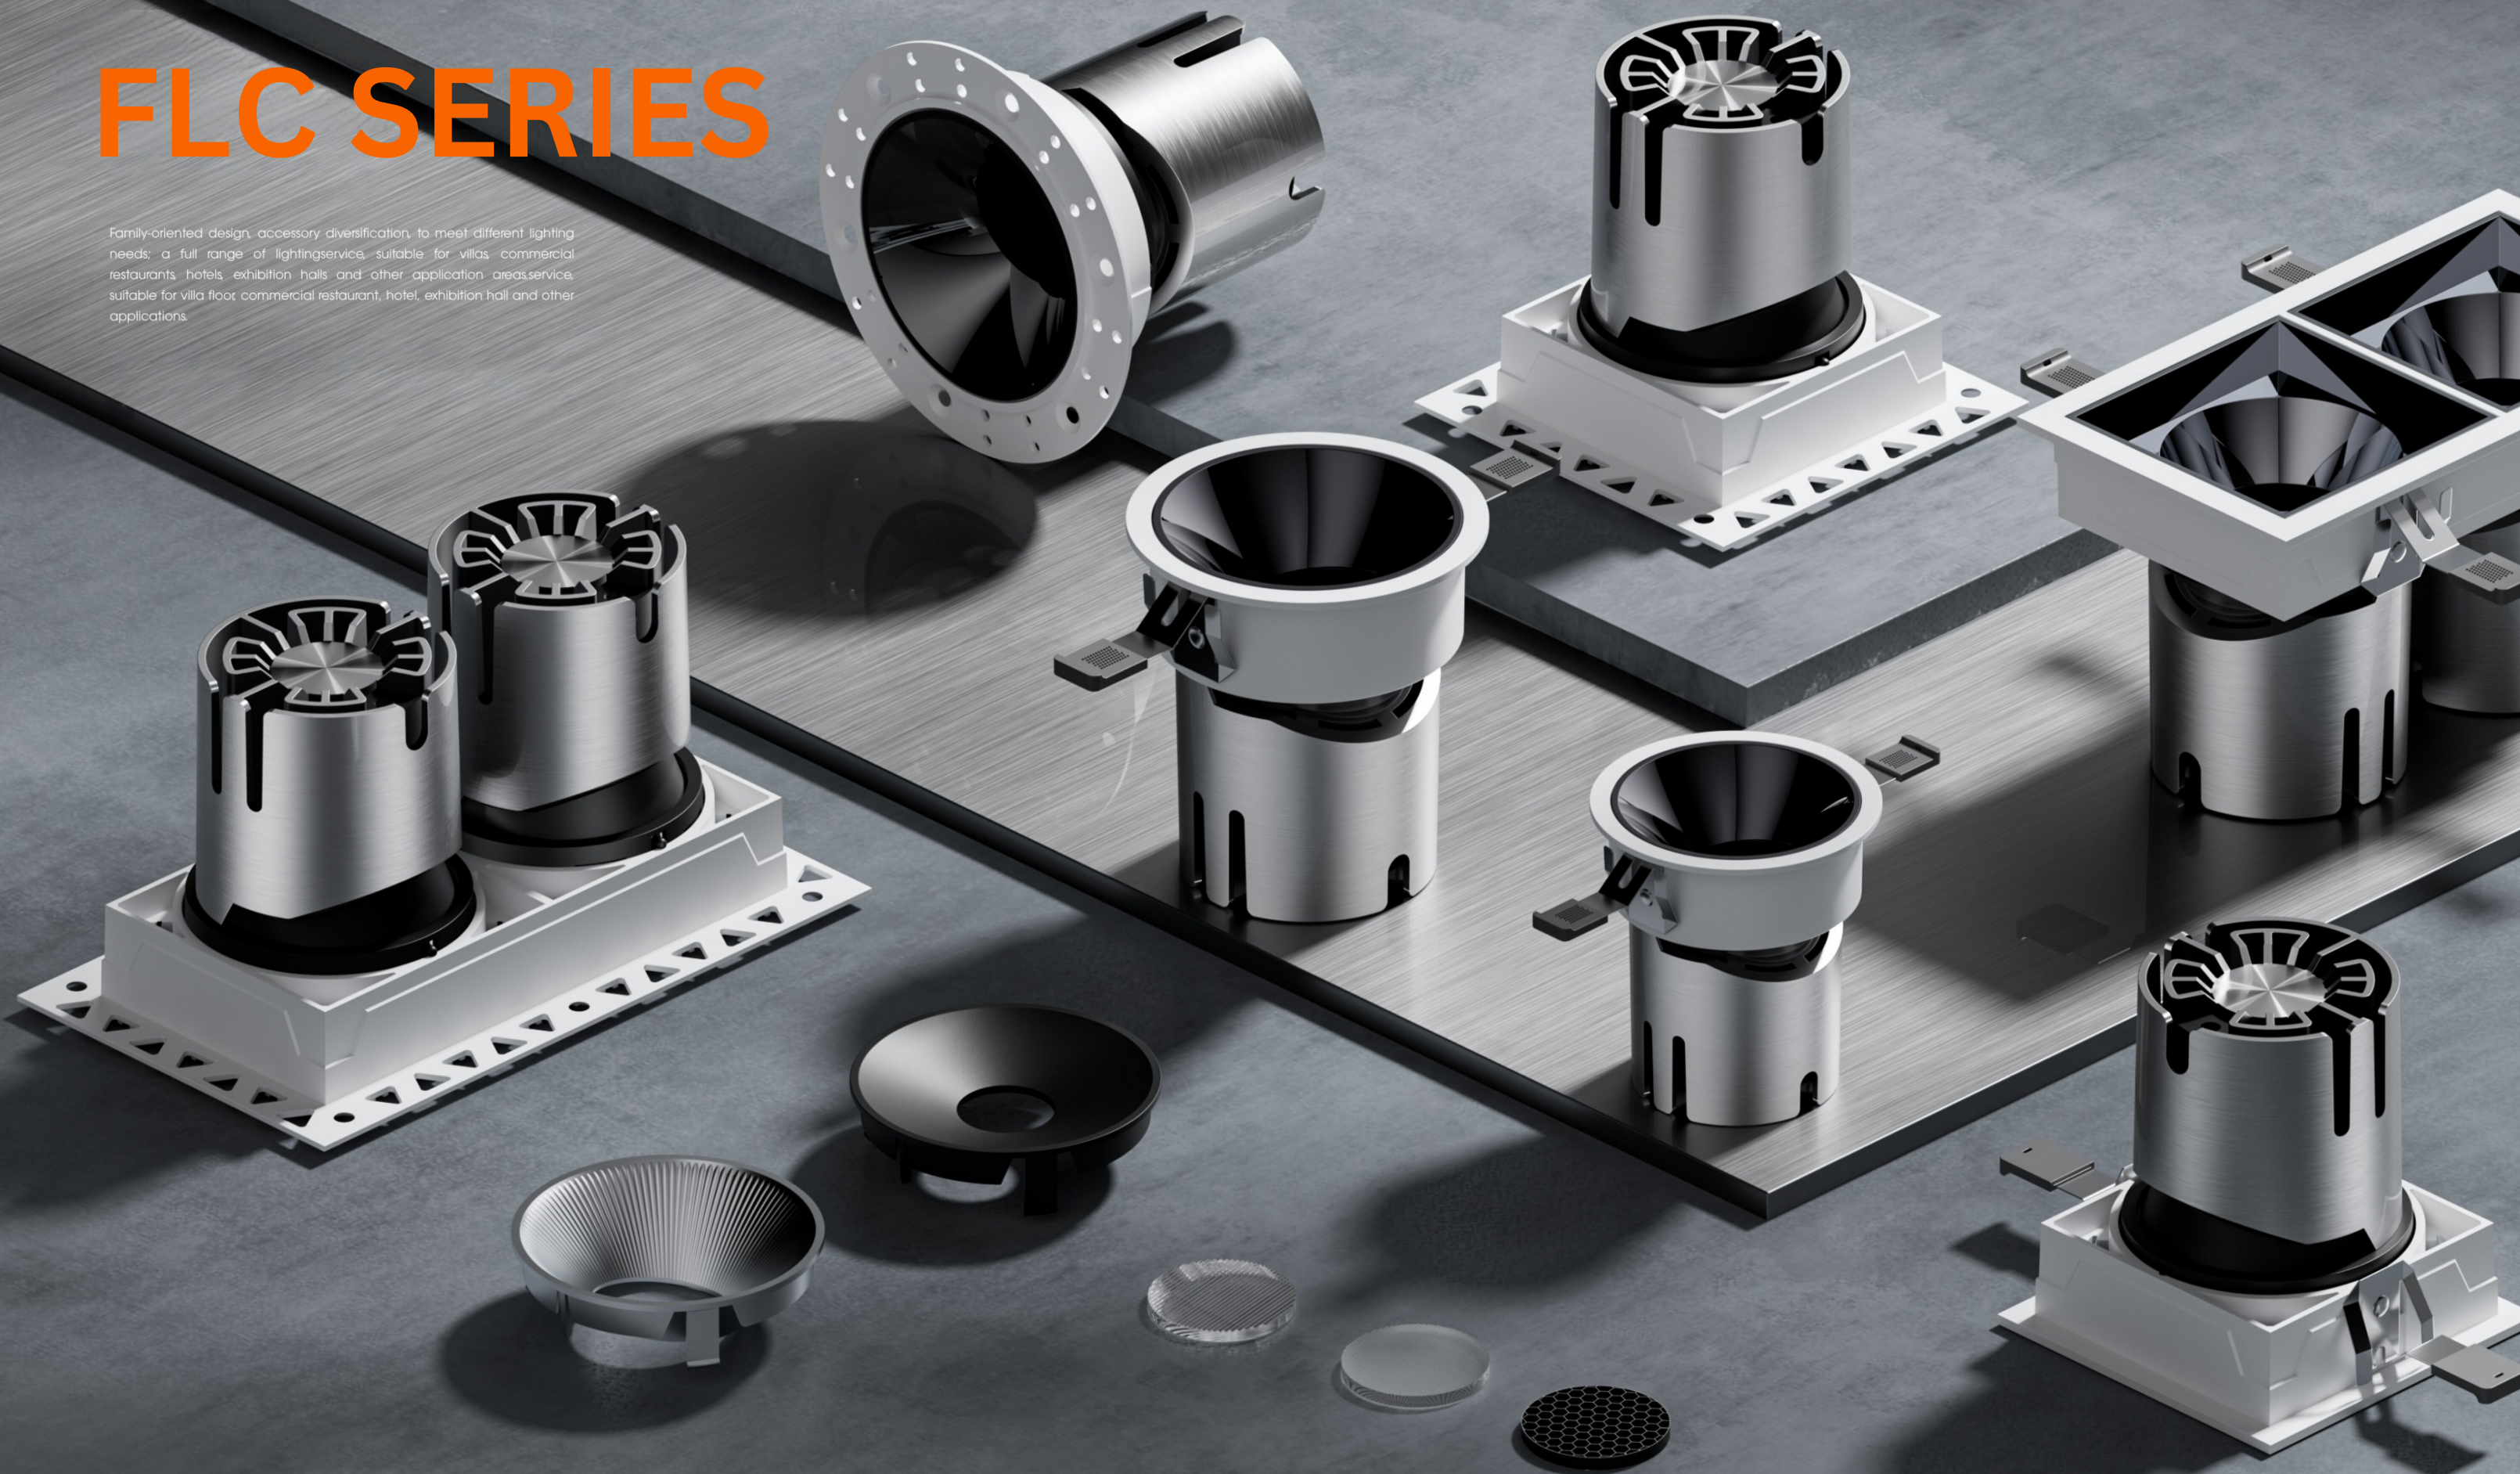


FLC SERIES


Spotlight



KO-GY-55A



POWER: 10W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

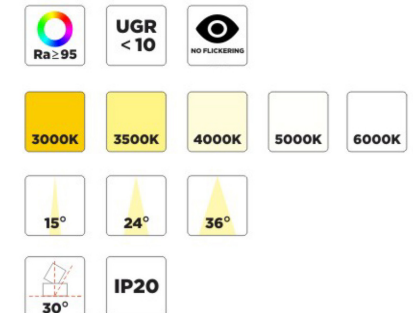



COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

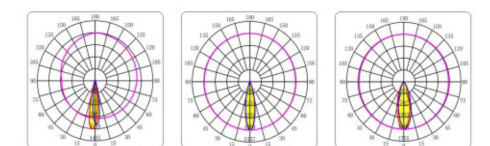

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

KO-GY-75G

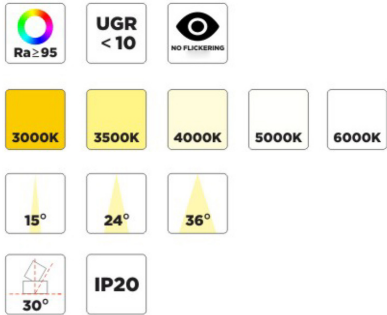


COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES






OPTICAL FILTER

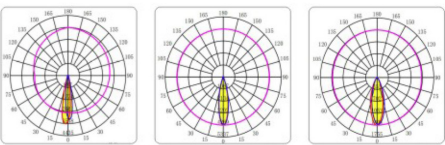

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-GY-95G

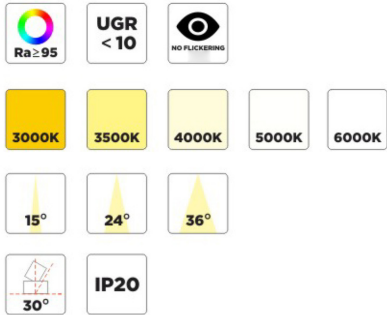


COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES




OPTICAL FILTER

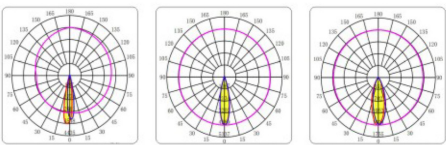


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 24W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-GY-55A

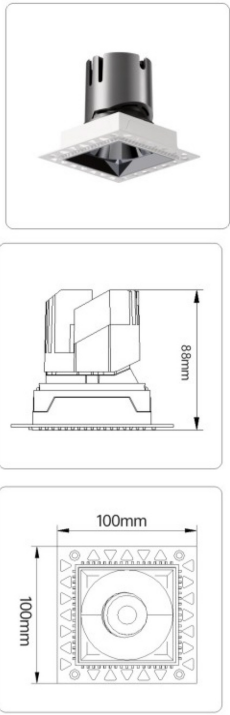

POWER: 7-10W
CUTOUT: 55mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

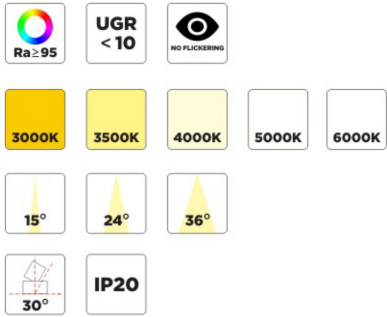


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES




OPTICAL FILTER

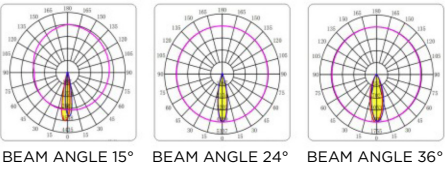

KO-GY-75G

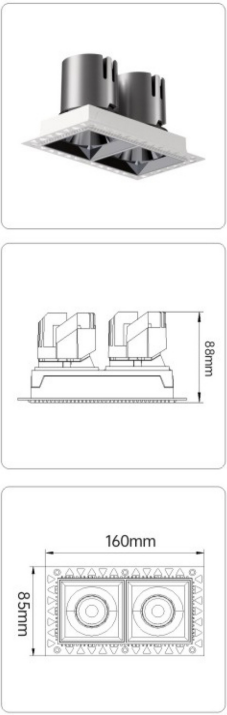

POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

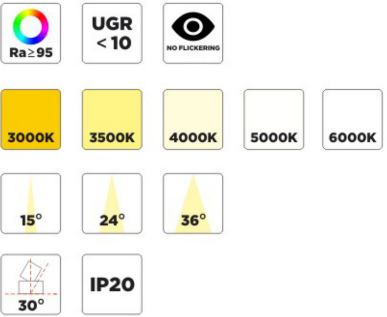


COLOR OF ANTI-GLARE CUP



ANTI-GLARE ACCESSORIES



OPTICAL FILTER

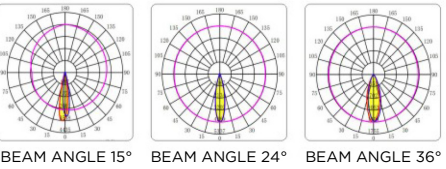



BG SERIES

Family-oriented design, accessory diversification, to meet different lighting needs a full range of lighting service suitable for villas commercial restaurants hoteKO exhibition halKO and other application areas service suitable for villa floor commercial restaurant, hotel, exhibition hall and other applications





BG SERIES

Spotlight



Magnetic Suction Model




POWER: 10W
CUTOUT: D55xH70mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


POWER: 15W
CUTOUT: D55xH70mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




LAMP COLOR



BEAM ANGLE 15°





BEAM ANGLE 24°



BEAM ANGLE 36°

Guide Rail Model



POWER: 10W
CUTOUT: D55xH70mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

POWER: 15W
CUTOUT: D55xH70mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



Ra ≥ 90



NO FLICKERING
无闪烁

3000K

4000K

6000K

15°

24°


36°

IP20

LAMP COLOR



LIGHT DISTRIBUTION CURVE

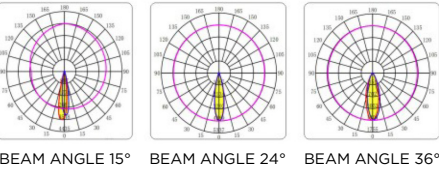


Embedded




POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

POWER: 15W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



Ra ≥ 90



NO FLICKERING

3000K

4000K

6000K

15°

24°


36°

IP20

LAMP COLOR



LIGHT DISTRIBUTION CURVE

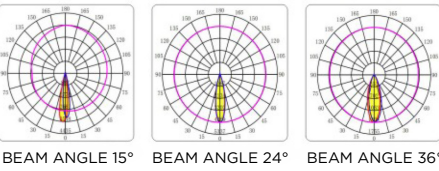

Surface Mounted Single Head



POWER: 10W
CUTOUT: D90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




POWER: 10W
CUTOUT: D90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR



LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Surface Mounted Double Head



POWER: 10W
CUTOUT: D240xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




POWER: 15W
CUTOUT: D240xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR



LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Surface
Mounted Three Head



POWER: 10W
CUTOUT: D380xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


POWER: 15W
CUTOUT: D380xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR




LIGHT DISTRIBUTION CURVE

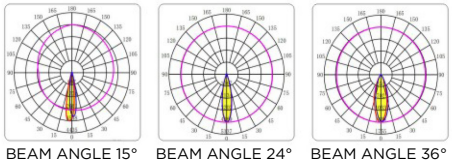

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Embedded



POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


POWER: 15W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR





LIGHT DISTRIBUTION CURVE

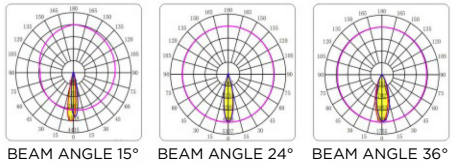

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Surface
Mounted Single Head



POWER: 10W
CUTOUT: D90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


POWER: 15W
CUTOUT: D90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




LAMP COLOR




LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°




BEAM ANGLE 24°



BEAM ANGLE 36°

Surface
Mounted Double Head



POWER: 10W
CUTOUT: 240xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


POWER: 15W
CUTOUT: 240xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




LAMP COLOR




LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°



BEAM ANGLE 24°




BEAM ANGLE 36°


Surface
Mounted Three Head



POWER: 10W
CUTOUT: D380xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




POWER: 15W
CUTOUT: D380xW90xH40mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR



LIGHT DISTRIBUTION CURVE

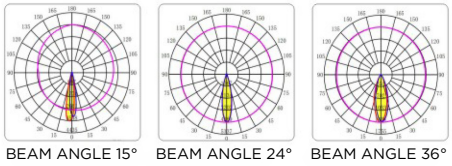


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Embedded




POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



LAMP COLOR



LIGHT DISTRIBUTION CURVE

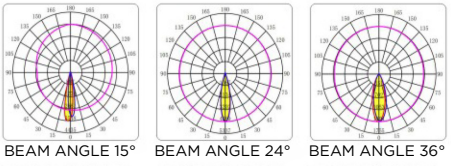



BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

Embedded
Bezel-Less



POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



3000K

4000K

6000K

15°

24°


36°

IP20


LAMP COLOR



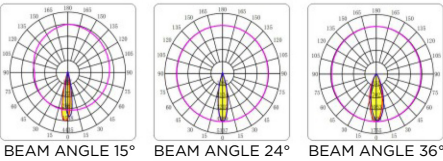

LIGHT DISTRIBUTION CURVE

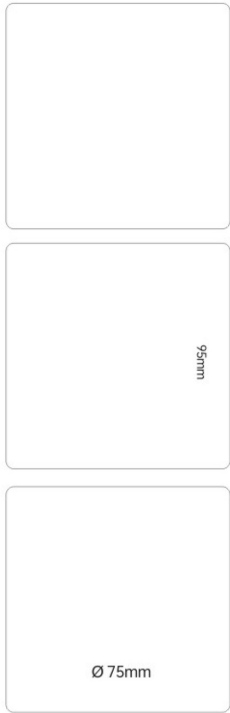

Single Head
With Outer Square & Inner Circle



POWER: 10W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



3000K

4000K

6000K

15°

24°


36°

IP20


LAMP COLOR



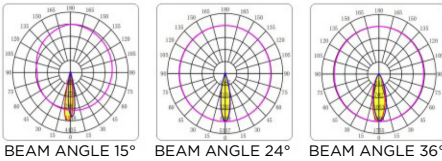

LIGHT DISTRIBUTION CURVE



Square Outside
And Round Inside



POWER: 20W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



3000K

4000K

6000K

15°

24°


36°

IP20


LAMP COLOR



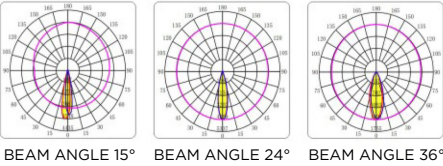

LIGHT DISTRIBUTION CURVE



Square Outside
and Three Heads Inside



POWER: 30W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V



3000K

4000K

6000K

15°

24°


36°

IP20

LAMP COLOR



LIGHT DISTRIBUTION CURVE

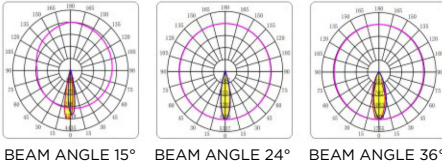

HG SERIES

A multi-faceted ring with a variety of light effects to choose from meets the needs of multiple places for flexible light control; the light source is deeply concealed and designed to provide anti-glare eye protection, making it possible to see the light but not the lights.



UPGRADABLE WATERPROOF DESIGN

Precision structure, waterproof and anti-glare, high protection level in line with European residential standards. Protect the lamp body from water vapor can withstand bathroom, kitchen, balcony lights. Easy to be corroded by water fog fumes and other environmental studies durable.




COMPOUND CONVEX LENS



Precise light control, high efficiency of light refraction, through the lens reflector After the final refraction to the anti-glare cup filter the light is uniform and soft, presenting perfect beautiful light spot, can achieve a high standard of visual light comfort, reduce glare damage to both eyes.

HG SERIES


Downlight

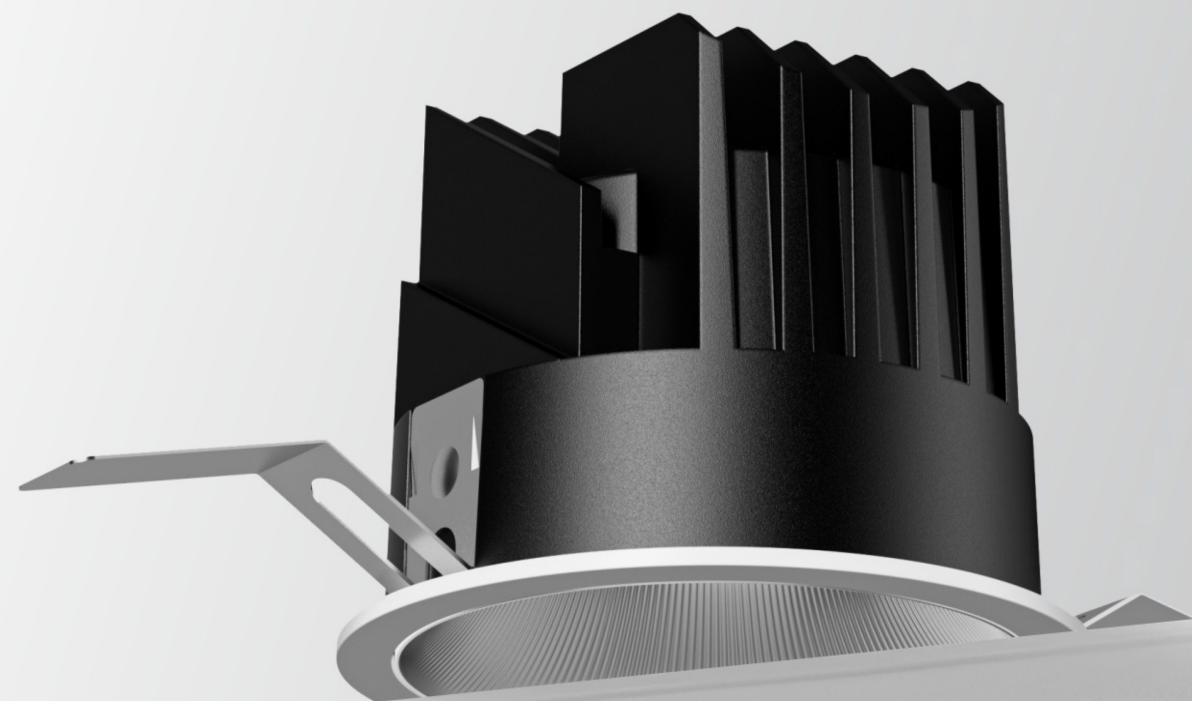

KO-911N Round Embedded



POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

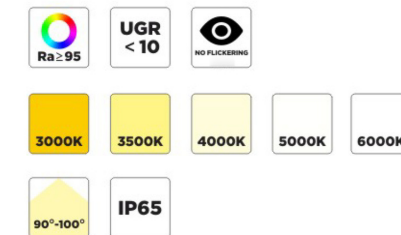


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER





LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-911N Round
Embedded



POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

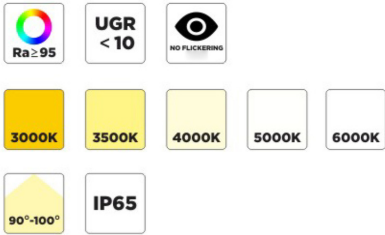


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER





LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-912N Round
Embedded



POWER: 20W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

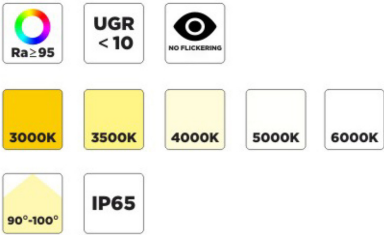

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER





LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°

KO-912N Round
Embedded



POWER: 20W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

Ra ≥ 95

UGR < 10

NO FLICKERING

3000K

3500K

4000K

5000K

6000K

90°-100°

IP65

COLOR OF ANTI-GLARE CUP

SILVER

GOLD

BLACK

WHITE

BLACK

ANTI-GLARE ACCESSORIES

CURVED SURFACE

INCLINED PLANE

OPTICAL FILTER


FROSTED FILTER

BEAD SURFACE FILTER

CLEAR LIGHT FILTER



CELLULAR NETWORK

LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°

KO-913N Round
Embedded



POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

Ra ≥ 95

UGR < 10

NO FLICKERING

3000K

3500K

4000K

5000K

6000K

90°-100°

IP65

COLOR OF ANTI-GLARE CUP

SILVER

GOLD

BLACK

WHITE

BLACK

ANTI-GLARE ACCESSORIES

CURVED SURFACE

INCLINED PLANE

OPTICAL FILTER


FROSTED FILTER

BEAD SURFACE FILTER

CLEAR LIGHT FILTER


CELLULAR NETWORK

LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-912N Round
Embedded

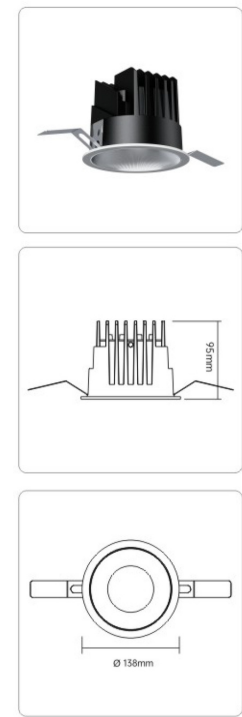

POWER: 30W
CUTOOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

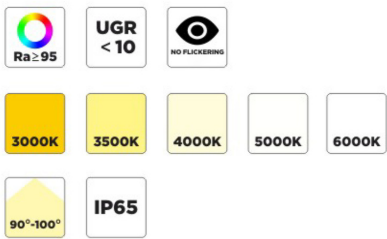

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER



LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°



XG SERIES

Multi-opening face ring optional, rugged shape radiator to ensure better heat dissipation, to enhance the lighting time protection.





UPGRADABLE WATERPROOF DESIGN

Precision structure, waterproof and anti-glare, high protection level in line with European residential standards. Protect the lamp body from water vapor can withstand bathroom, kitchen, balcony lights. Easy to be corroded by water fog fumes and other environmental studies durable.




DEEP ANTI-GLARE

The light source is deeply hidden design, effectively preventing glare, Light through the lens in the anti-glare cup filtered to the next irradiation. Lamp body out of the light evenly and softly, both to achieve the high standard of illumination effect, while the light sense of comfort, reduce the eye by the glare stimulation.

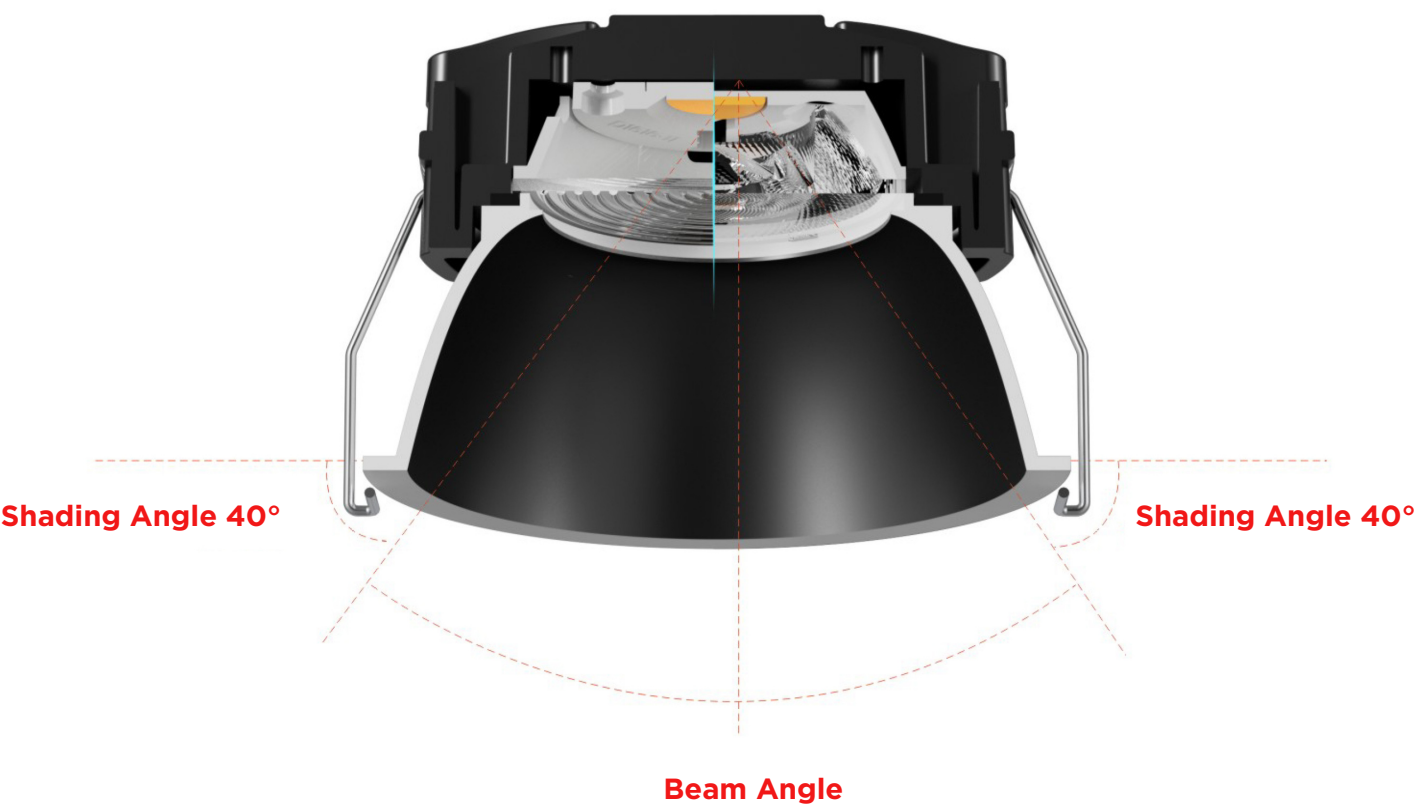

Fresnel Lens

Anti-glare thread structure design, good light gathering effect, bright and uniform light output, increasing anti-glare effect.



Plano Lens




The light refraction efficiency is high and the beam is gentle and gentle.

XG SERIES

Downlight



KO-901N Round Embedded



POWER: 12W

CUTOUT: 75mm


CRI: >95

MATERIAL: Die-cast aluminum

CHIP: Light source: COB

UGR: Anti-glare index>10

VOLTAGE: AC85-224V

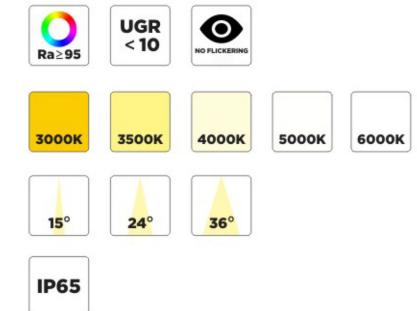


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER





LIGHT DISTRIBUTION CURVE

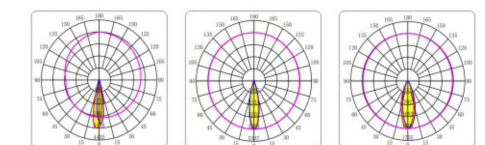


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

KO-901N Round
Embedded



POWER: 12W
CUTOUT: 75mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

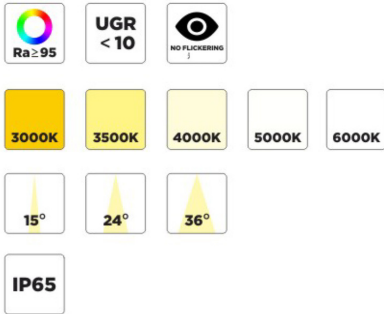

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER






LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

KO-902N Round
Embedded



POWER: 20W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

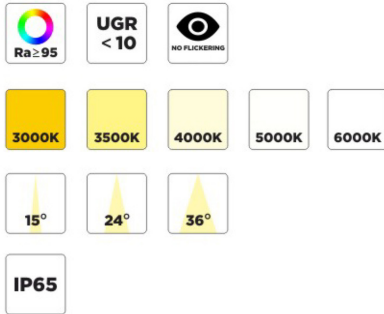

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

KO-902N Round
Embedded

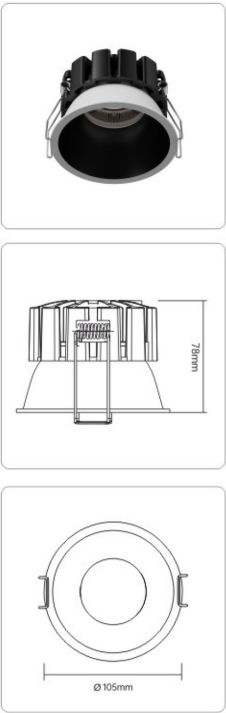

POWER: 20W
CUTOUT: 95mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

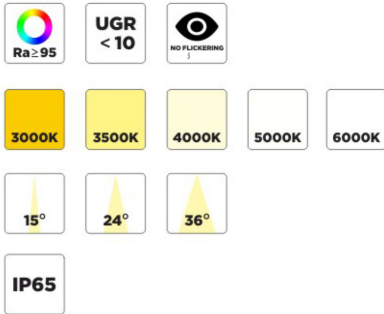

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

KO-903N Round
Embedded

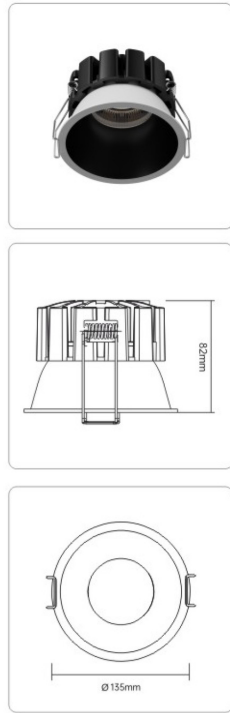

POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

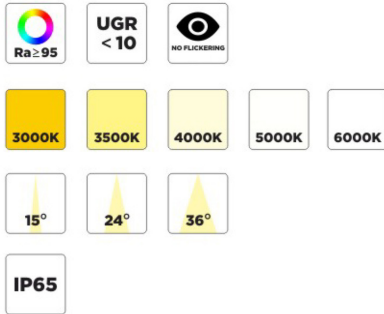


COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



OPTICAL FILTER







LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°




KO-HG120B
Round Embedded

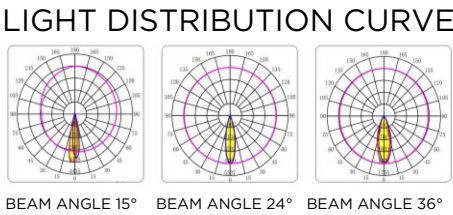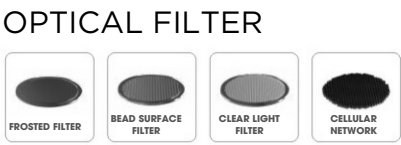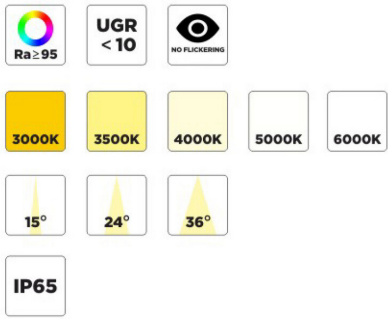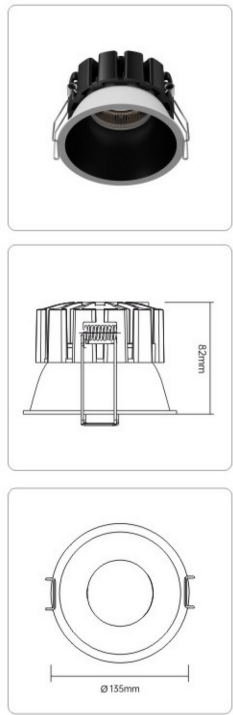

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V




KO-903N Single
Head Square Circle

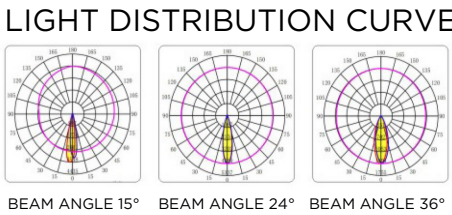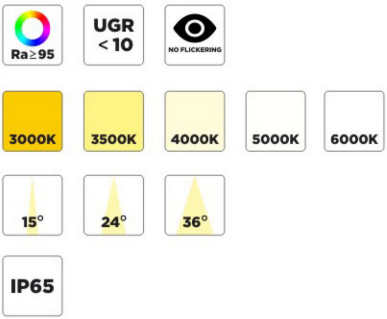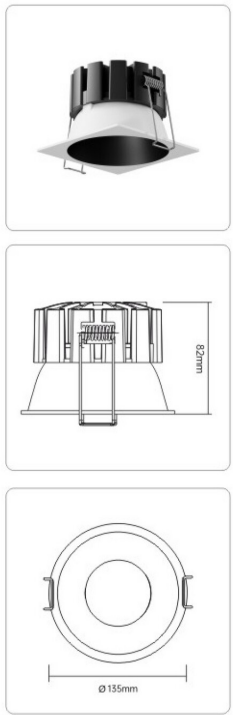

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: SMD
UGR: Anti-glare index>10
VOLTAGE: AC85-224V





KO-HG120B
Round Embedded

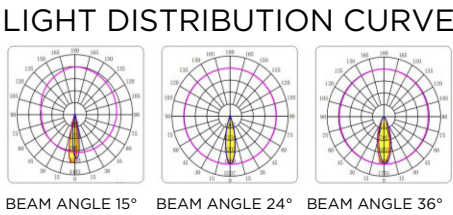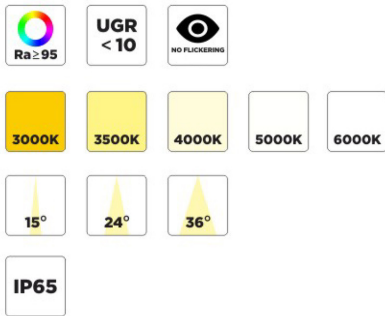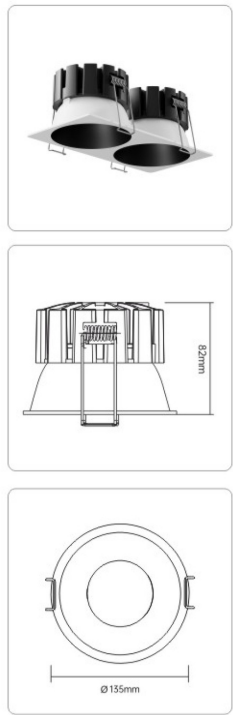

BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°

POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

KO-903N Single
Head Square Circle

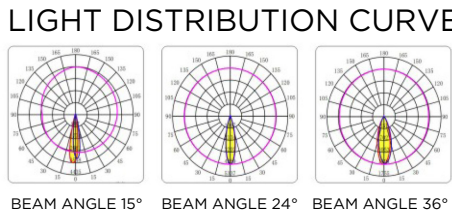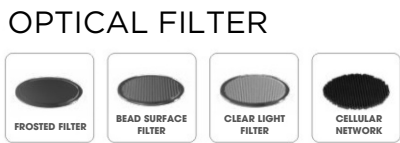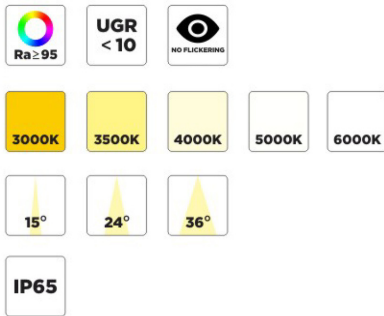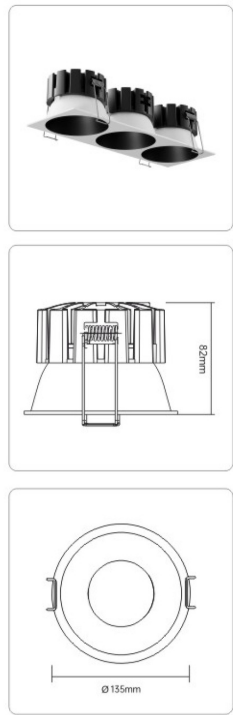


BEAM ANGLE 15° BEAM ANGLE 24° BEAM ANGLE 36°


POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: SMD
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


KO-HG120B


Single Head Square

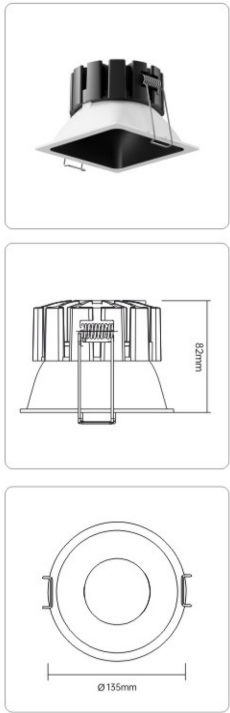



POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


Ra≥95


UGR<10


NO FLICKERING


3000K


3500K


4000K


5000K

6000K

15°

24°

36°

IP65

COLOR OF ANTI-GLARE CUP

SILVER

GOLD

BLACK

WHITE

BLACK

ANTI-GLARE ACCESSORIES


CURVED SURFACE


INCINED PLANE


OPTICAL FILTER

FROSTED FILTER

BEAD SURFACE FILTER


CLEAR LIGHT FILTER

CELLULAR NETWORK

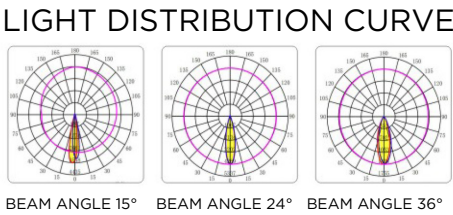



KO-903N

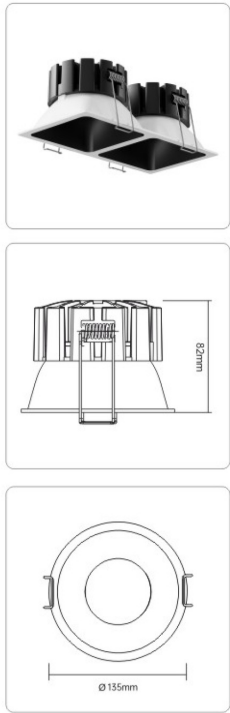
Double-Headed Square





POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: SMD
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


Ra≥95


UGR<10


NO FLICKERING


3000K


3500K


4000K


5000K

6000K

15°

24°

36°

IP65

COLOR OF ANTI-GLARE CUP

SILVER

GOLD

BLACK

WHITE


BLACK


ANTI-GLARE ACCESSORIES


CURVED SURFACE


INCINED PLANE


OPTICAL FILTER

FROSTED FILTER

BEAD SURFACE FILTER


CLEAR LIGHT FILTER

CELLULAR NETWORK

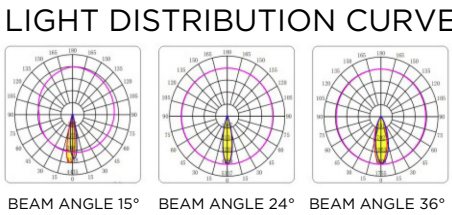



KO-HG120B

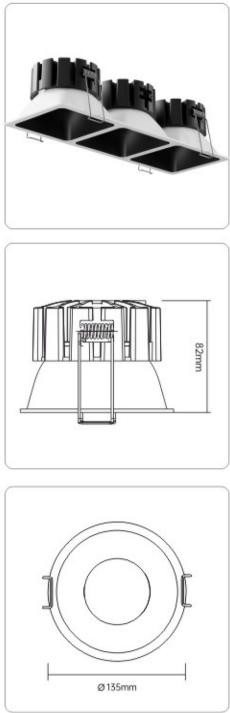
Three-Head Square





POWER: 30W
CUTOUT: 120mm
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: Light source: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V


Ra ≥ 95


UGR < 10


NO FLICKERING


3000K


3500K


4000K


5000K

6000K

15°

24°

36°

IP65

COLOR OF ANTI-GLARE CUP

SILVER

GOLD

BLACK

WHITE


BLACK


ANTI-GLARE ACCESSORIES


CURVED SURFACE

INCLINED PLANE

OPTICAL FILTER


FROSTED FILTER


BEAD SURFACE FILTER


CLEAR LIGHT FILTER

CELLULAR NETWORK

LIGHT DISTRIBUTION CURVE

BEAM ANGLE 15°

BEAM ANGLE 24°

BEAM ANGLE 36°




MG SERIES

Traditional simple design is elegant and generous with high-quality optical accessories stable and long-lasting working conditions to provide High Illumination support for indoor and outdoor occasions.





MG SERIES

Downlight

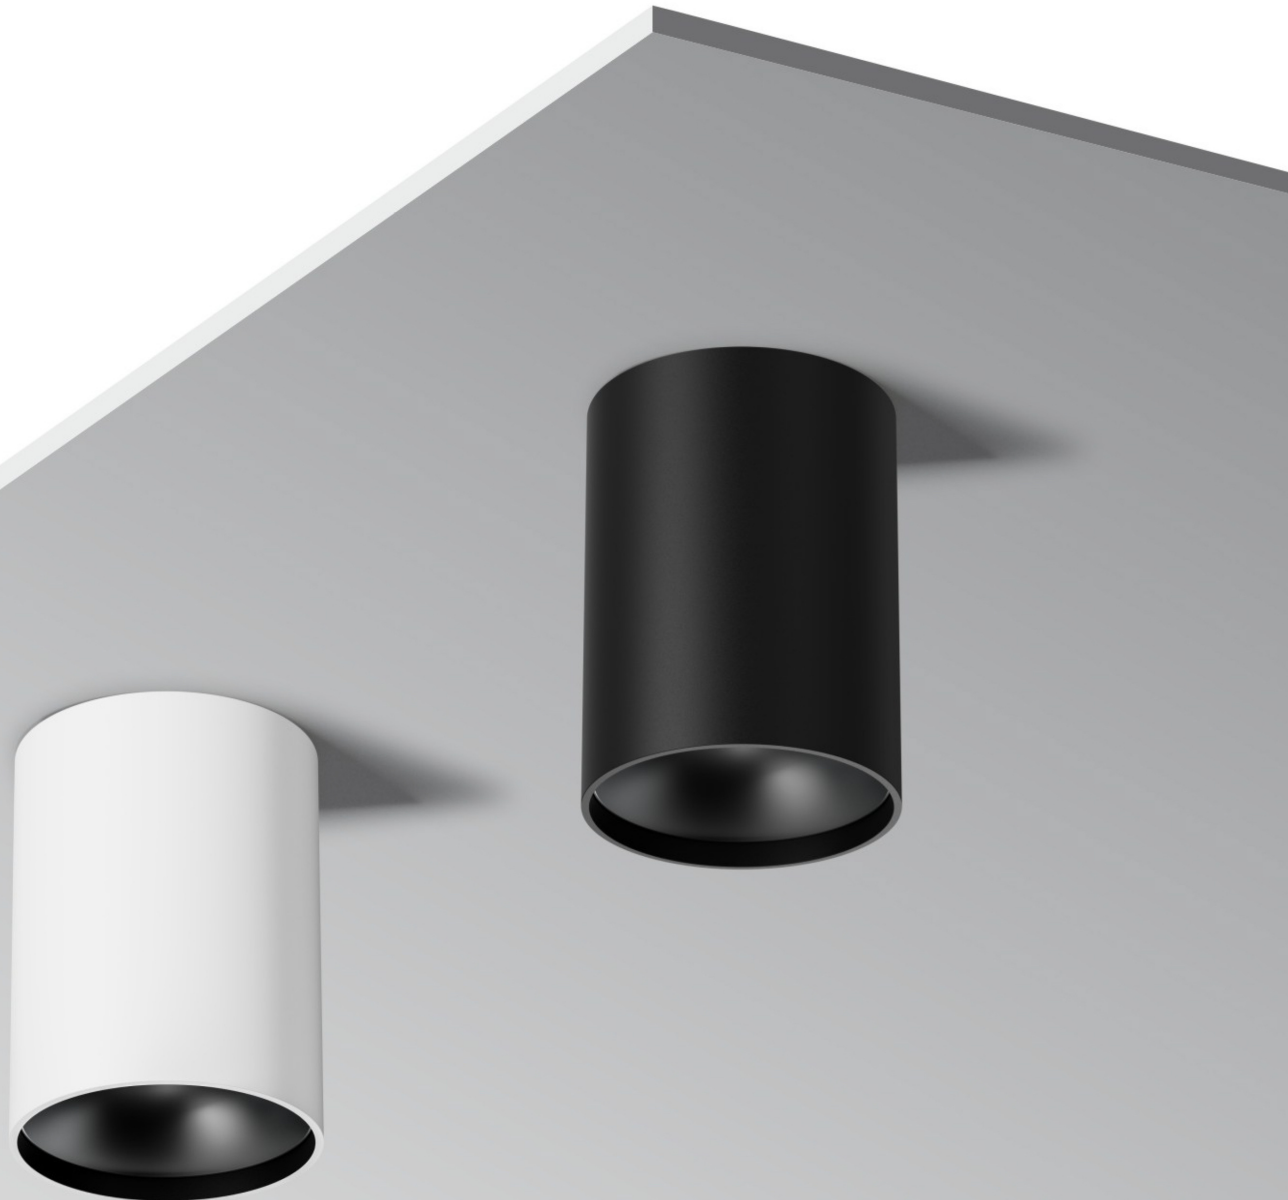

KO-811N Surface Mounted Ceiling Type



POWER: 12W

CRI: >95

MATERIAL: Die-cast aluminum

CHIP: SMD

UGR: Anti-glare index>10

VOLTAGE: AC85-224V



COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-801N Surface
Mounted Ceiling Type

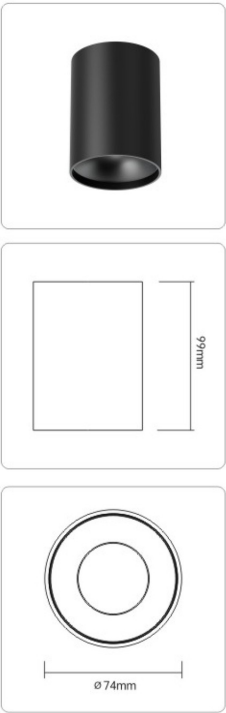

POWER: 12W
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

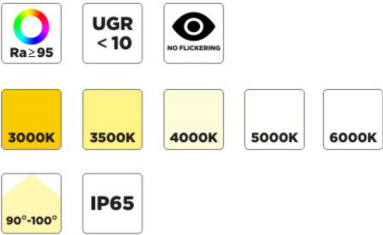

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-812N Surface
Mounted Ceiling Type

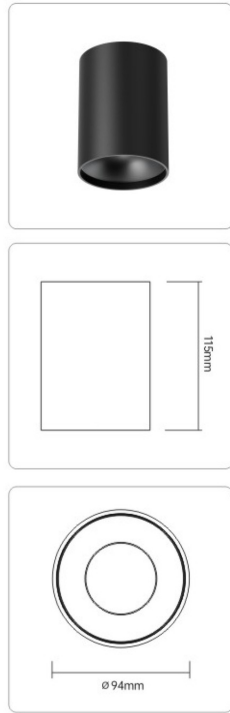

POWER: 20W
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: SMD
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

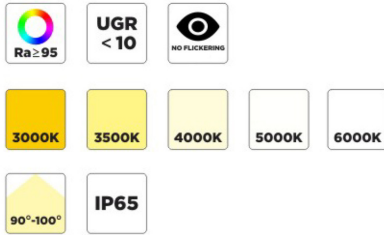

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-802N Surface
Mounted Ceiling Type

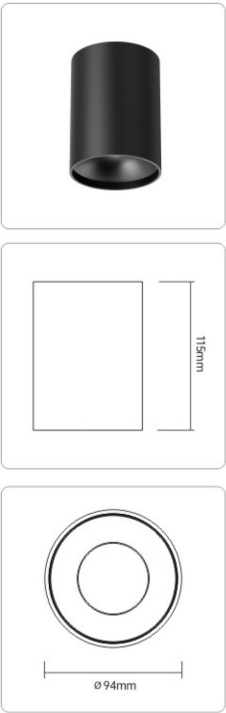

POWER: 20W
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

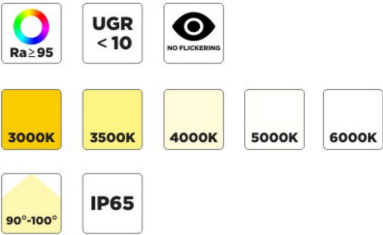

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-813N Surface
Mounted Ceiling Type

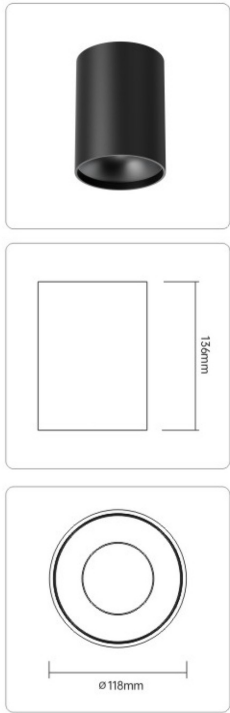

POWER: 30W
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: SMD
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

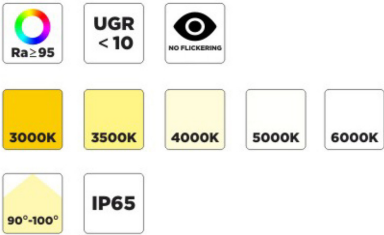

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR




LIGHT DISTRIBUTION CURVE




BEAM ANGLE 15°

KO-803N Surface
Mounted Ceiling Type

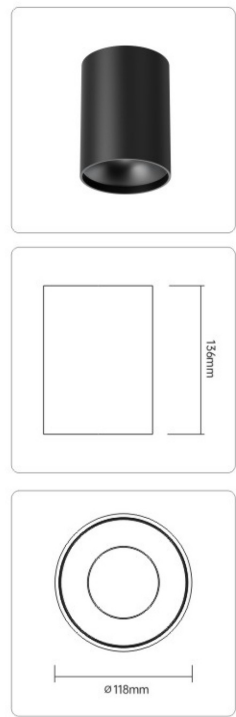

POWER: 30W
CRI: >95
MATERIAL: Die-cast aluminum
CHIP: COB
UGR: Anti-glare index>10
VOLTAGE: AC85-224V

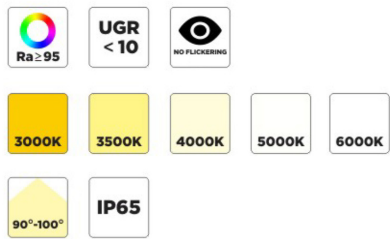

COLOR OF ANTI-GLARE CUP




ANTI-GLARE ACCESSORIES



PRODUCT COLOR



LIGHT DISTRIBUTION CURVE



BEAM ANGLE 15°



“For further information about King Ornan’s industry-leading LED lighting products and how we can fulfill your illumination needs, please don’t hesitate to get in touch. Our dedicated team is here to provide you with comprehensive details, answer your queries, and offer tailored solutions to illuminate your spaces efficiently and effectively.”

